

Features

HIGH CURRENT CARRY AND HIGH VOLTAGE

Inert gas filled arc chamber suitable for high voltage switching

COMPACT STRUCTURE, LOW NOISE

Small, low-profile designs with low noise while carrying or switching loads

COIL ECONOMIZER

Economized coils for low power consumption

SAFE FOR EXPLOSIVE ENVIRONMENTS

No arc leakage due to a hermetically sealed design

HIGH RELIABILITY DESIGN

Hermetic sealing creates a stable environment for high voltage switching

NO SPECIFIC MOUNTING ARRANGEMENT

Mountable in any orientation without reduction of performance

VARIOUS APPLICATIONS

Battery Disconnect, EV Charging, Energy Storage Systems, Photo Voltaic, Power Control, Circuit protection and much more

Sealing Type: Ceramic

- ✓ Low profile chassis mount power terminals
- ✓ Normally closed



Certification Information

1. Meet RoHS (2011/65/EU)
2. CE certified
3. UL Approved

Nomenclature

AGX14

-

B

A

B

Series code:
"AGX14" = AGX14

Type Code:
Blank = Main Contacts (NO)
"NC" = Main Contacts (NC)

Coil Voltage Code:
"B" = 12VDC
"C" = 24VDC
"E" = 48VDC

Coil Termination
"A" = Flying leads 38cm(15in)

Auxiliary Contact:
Blank = None
"B" = SPST, Normally Open
"C" = SPST, Normally Closed

High Voltage DC Contactor
AGX14 Series
350A+/800VDC




Product Data Sheet

MAIN CONTACT		
Contact Arrangement	1 Form X (SPST-NO)	
Rated Operating Voltage	800 VDC	
Rated Current	350 A	
Contact resistance	0.4mohms	
Max Short Circuit Current	2000A@320VDC	
Dielectric Withstanding Voltage (initial)	Between Open Contacts	4000Vms, 1min, <1mA
	Between Contacts to Coil	2200Vms, 1min, <1mA
Insulation Resistance (Initial)	Terminal to Terminal	New: 100M Ω
	Terminals to Coil	End: 50M Ω

AUX CONTACT	
Aux. Contact Arrangement	1 Form A
Aux. Contact Current Max.	2A@30VDC / 3A@125VAC
Aux Contact Current Min	100mA@8V
Aux. Contact Resistance Max	0.417ohms@30VDC 0.150ohms@125VAC

Carry Current
(with 85°C terminal Temperature rise):

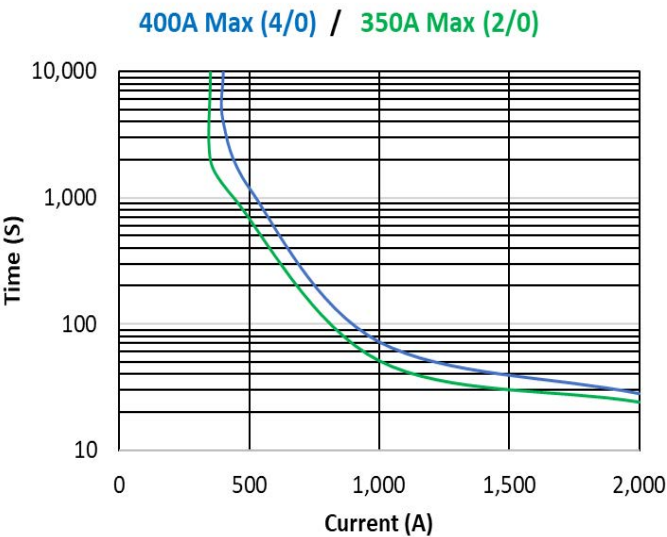

OPERATE / RELEASE TIME	
Operate Time	20ms
Release Time	12ms


ENVIRONMENTAL DATA		
Shock	Functional	196m/s ² Sine half-wave pulse
	Destructive	490m/s ² Sine half-wave pulse
Operating Temperature		-55°C to +85°C
Altitude		<4000m
Weight		1.102Lb (500g)

COIL DATA			
Nominal Voltage	12VDC	24VDC	48VDC
Coil Voltage (Max.)	16V	32V	64V
Max. Pick-up Voltage	8V	16V	40V
Drop-out Voltage (25°C)	0.5-4V	2-7.5V	4-15V
Pick-Up Current, Max (75 ms)	3.9A	1.6A	0.97A
Coil current (25°C)	0.23A	0.097A	0.042A
Coil Power (25°C)	2.8W	2.3W	2.0W
Internal Coil Suppression			
Coil Back EMF	55V	55V	125V
Transients, Max(13ms)	±50V	±50V	±75V
Reverse Polarity	16V	32V	64V


EXPECTED LIFE	
Mechanical Life	1 million Cycles

Electrical Life


Estimated Make and Break Resistive Load Ratings

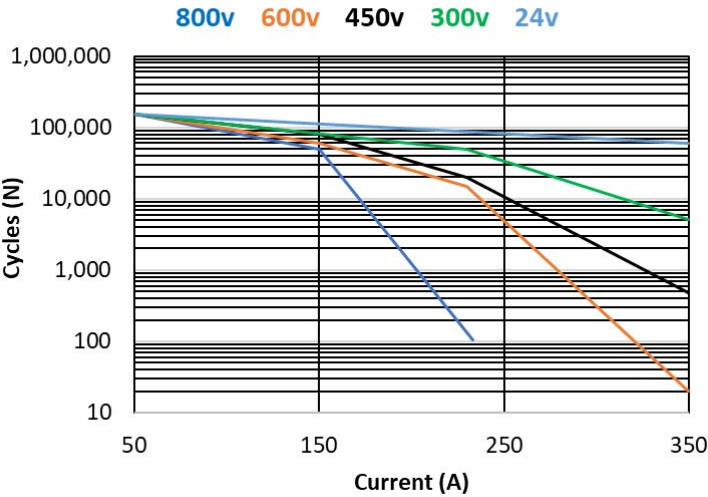


Outline Dimensions : inches (mm)

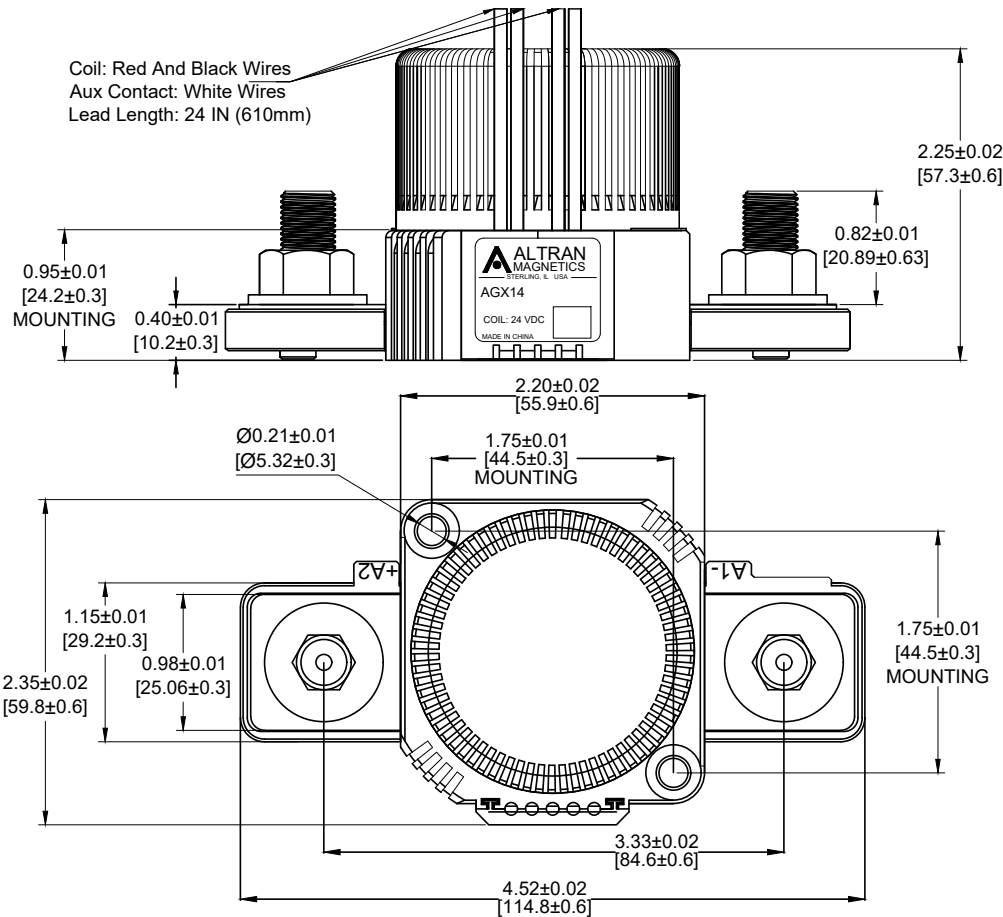

Power Contacts



Auxiliary contacts (optional)



Wire Size	20AWG
Mounting Thread	M10x1.5mm

Application Notes

1. To prevent loosening, split washers should be used whenever the contactor is installed. All terminals or copper conductors must directly contact the contractor's main terminals. Please control the nut-tightening torque of each part within the specified range in the table below. If the torque exceeds the recommended range, it may cause damage to the sealed cavity and thread damage.
- Mounting torque: 123 - 177 lb. in. (14-20 N.m) Max.
2. This contactor features an internal diode for coil suppression. No external diodes should be added across the coil. The use of additional external coil suppression can slow the release time and invalidate the life cycle ratings or cause the contactor to be unable to interrupt the maximum current specified. If lower coil back EMF is required, please get in touch with Altran for assistance.
3. Power switching lifecycles are based on current flow from A2(+) to A1(-). For best breaking performance, the contactor should be installed so that current flows from A2(+) to A1(-). There are cases where the contactor will interrupt power in the opposite direction, but please get in touch with Altran to confirm suitability. The current flow's direction is irrelevant during make or when flowing on closed contacts. For bi-directional contractors, please get in touch with Altran.
4. Applications with capacitors will require a pre-charge circuit.
5. Electrical life rating is based on the circuit's resistive load with 27 μ H maximum inductance. Because your application may be different, we suggest you test the contactor in your circuit to verify life is as required.
6. End of life is defined as when the dielectric, insulation, or contact resistance fails the specifications listed.
7. Coil drive power must be greater than coil power, or it will reduce performance capability.
8. Do not allow debris and oil to the main terminals; ensure that the main terminals are in reliable contact with the load conductor. Otherwise, the temperature rise of the terminal/conductor connection may be too high due to the excessive contact resistance.
9. Do not use if dropped.
10. Avoid mounting the relay in strong magnetic fields (near a transformer or magnet) or close to an object that radiates heat.
11. Determining all the performance parameters in each specific application is impossible. Therefore, customers should choose products that match their conditions of use. If in doubt, contact Altran. The customer will be responsible for validating that the products meet their application.
12. Altran reserves the right to make product changes as needed. Customers should reconfirm the specification's contents or ask us to supply a new specification if necessary.