



FLUSH SILHOUETTE SWITCHES  
Ø22 SWITCHES & PILOT LIGHTS  
CW SERIES



# Push-in Switches & Pilot Lights

Smart design, simple wiring



IDEC CORPORATION



## All thoughts focused on the same goal

Since the late 1970s, IDEC has continued to instill and pursue “Save and Safe”, as part of our corporate DNA. Along with the rapid advancement in machine intelligence and demands for environmental resistance and high reliability in recent years, we need to face societal issues such as shortage in workforce.

To solve these issues, we have set as our goals “Safe, Simple & Smart= $S^3$  (S cube)”, aiming to provide society with products and services that will bring about greater innovation and lasting quality.

# Safe

Products anyone can use with safety and assurance, from a company seeking to be number one in safety

# Simple

Products appreciated by all our customers for their ease of connection regardless of experience

# Smart

Products that make labor-saving and space-saving a reality



# Useful NEW


We provide easy and user-friendly products with new technology.

## First in the industry Six different colors with a single LED

Previously, 5 different color LEDs were required but with the new illuminated unit, only a single LED is used.


Only the lens needs to be replaced to change the illumination color.

The new LED reduces maintenance time, makes stock control easier, and is environmentally friendly.

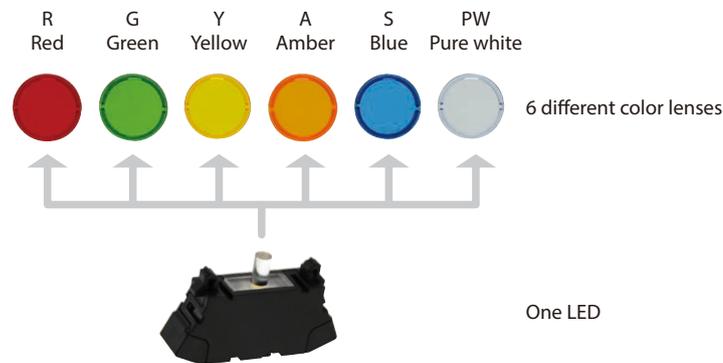

## High visibility with new LED

Brighter and clearer compared  
to conventional LEDs

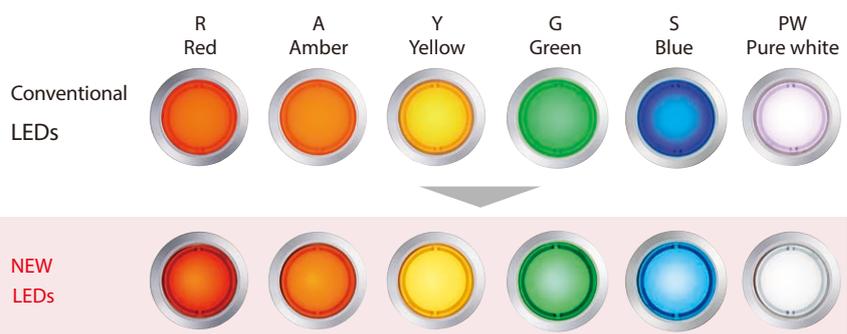

## ISO3864-4 Safety color compliant

(Corresponding colors: R (Red), Y (Yellow), G (Green), PW (Pure white))

Safety colors are defined with ISO standards.

The bright and clear colors are suited for emergency situations




# Push-in

Smart Simple

## Simple wiring for greater work efficiency

Ferrules and solid wires can be connected simply by push-in insertion, without a screwdriver. <sup>(\*)1</sup> To remove, a flat-blade screwdriver is inserted in a simple two-action process. Since wiring can be performed regardless of operators' skill level, wiring time is reduced.

<sup>(\*)1</sup> When connecting stranded wire, insert the wire while holding down the pusher with a flat-blade screwdriver.

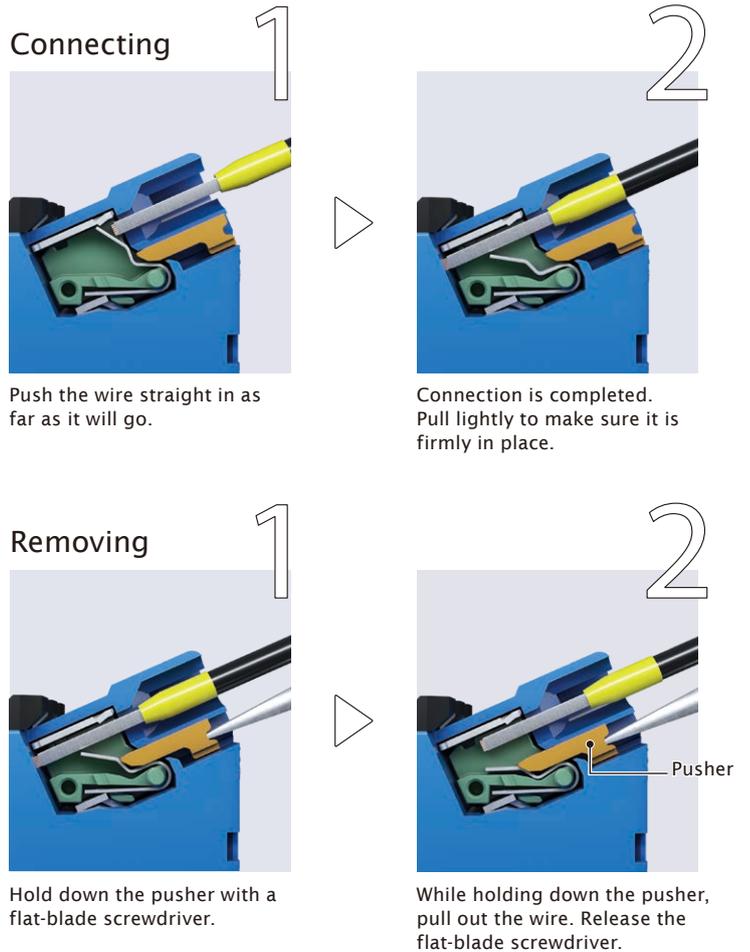


Smart

## Time saving and efficient

Push-in connections are made simple by inserting the wire, reducing wiring time by approximately 55% compared to conventional screw terminals.

**[Conditions]**

Push-in: Insert wire with ferrule.  
Screw terminals: With screw loosened, insert wire, then tighten with electric driver.

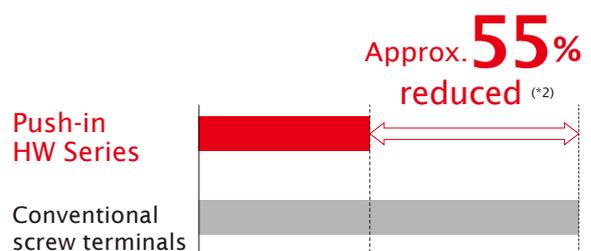

<sup>(\*)2</sup> As of IDEC research (as of January 2020)

Safe

## Reliable and easy


Finger-safe structure and vibration resistance. What's more, the space-saving design means better workability in a smaller space.

### Stays firmly in place

Since the ferrule is held in place by a spring load, the wiring remains taut and vibration resistance is improved.

### Finger-safe structure

IP20 Finger-safe protection enables wiring to be performed without direct contact between screwdriver and conductive part.

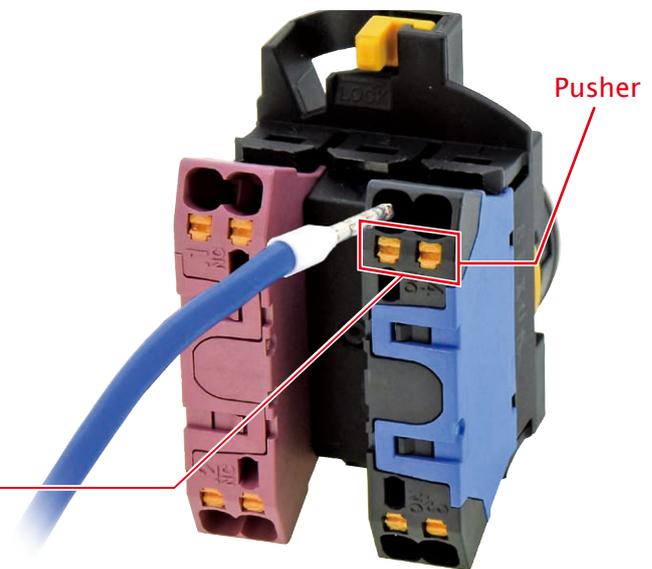

Smart

Simple

## Wiring procedure comparison

Work can be performed without using tools and regardless of operators' skill level.

\*1) When ferrule is used.

### Conventional screw terminal



### Push-in terminal <sup>(\*)</sup>



Smart

## No additional tightening needed

Because screws are not used on push-in terminals, re-tightening of screws is not required.

# Product Upgrade

The superior functions of the conventional CW Series still remain while improving ease of use.

## Contact block depth reduced

Smart

Saves space inside panel and enables downsizing of equipment.

### Pushbuttons

Single contact block

Panel depth

36.4mm



**NEW**

Double contact block

Panel depth

59.6mm




## Angled Connections

Smart

Angled connections make wiring easy even when switches are mounted on a panel.

Also, 24-degree inclination faced to the panel improves the fit of the wires, and contributes to downsizing of the panel and equipment.

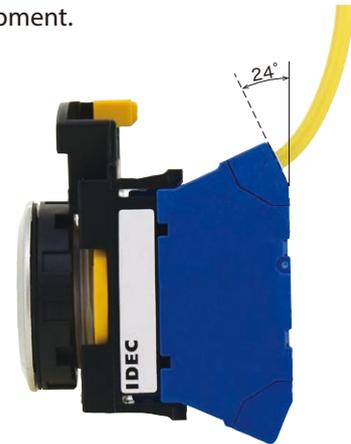


**NEW**

## 4-contact configuration available with double contact blocks

Double contact blocks

Single contact blocks

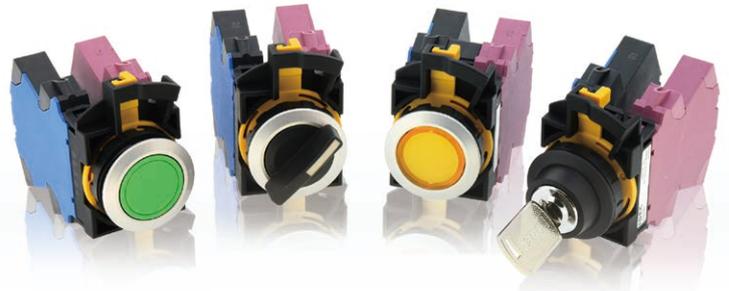


Double contact blocks available for all models including pushbuttons, illuminated pushbuttons, selector switches, and key selector switches.

# Added Value

Our aim is to create products that enable customers to experience the utmost usability.


## Test point

A test point is available to check connectivity of the wiring.  
Check the connectivity easily using a tester.

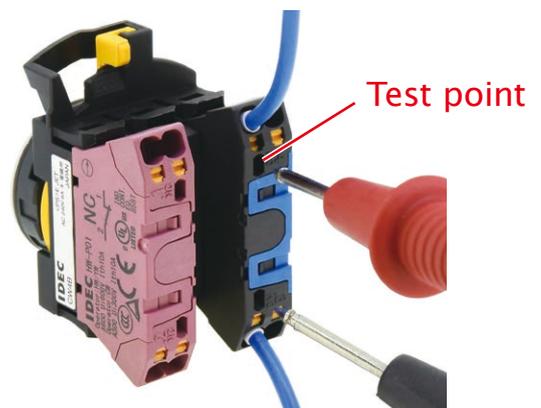

## Sub-Assembled Units

Sub-assembled units can be ordered for flexible use, such as sudden changes in design.

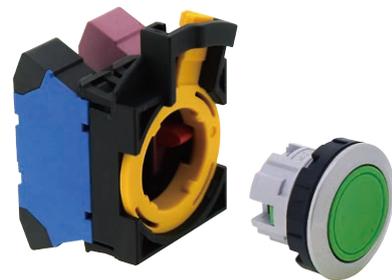

# Flush Silhouette Switches

## ø22 CW Series Push-in Switches & Pilot Lights

### Products

Pushbuttons:	see page 10
Illuminated pushbuttons:	see page 13
Pilot lights:	see page 16
Selector Switches:	see page 18
Key Selector Switches:	see page 23



• See website for details on approvals and standards.

### Contact Ratings

Rated Insulation Voltage	300V
Rated Thermal Current	10A

### Rated Operating Voltage and Current by Utilization Category

#### [Specification 1] (\*1)

Rated Operating Voltage (Ue)			24V	48V	50V	110V	220V
Rated Operating Current (Ie)	AC 50/60 Hz	Resistive Load (AC-12)	10A	—	10A	10A	6A
		Inductive Load (AC-15)	10A	—	7A	5A	3A
	DC	Resistive Load (DC-12)	10A	5A	—	2.2A	1.1A
		Inductive Load (DC-13)	5A	2A	—	1.1A	0.6A

• The operational current represents the classification by making and breaking currents (IEC60947-5-1).

#### [Specification 2] (\*2)

Rated Operating Voltage (Ue)			24V	48V	50V	110V	220V
Rated Operating Current (Ie)	AC 50/60 Hz	Resistive Load (AC-12)	5A	—	5A	5A	3A
		Inductive Load (AC-15)	5A	—	3.5A	2.5A	1.5A
	DC	Resistive Load (DC-12)	5A	2.5A	—	1.1A	0.55A
		Inductive Load (DC-13)	2.5A	1A	—	0.55A	0.3A

• The operational current represents the classification by making and breaking currents (IEC60947-5-1).

• Minimum applicable load: 3V AC/DC, 5 mA (applicable range may vary with operating conditions)

\*1) See electrical life specification on page 9.

UL, c-UL rating: A300, CCC rating: A300, TUV rating: A300

### Degree of Protection (Table 1)


Type	IP65	IP66	IP67	UL Type 4X
Illuminated Pushbutton	Yes	No (*2)	No (*2)	No (*2)
Pilot lights	Yes	Yes	No	Yes
Pushbutton	Yes	No (*2)	No (*2)	No (*2)
Selector Switch	Yes	Yes	Yes	Yes
Key Selector Switch	Yes	Yes	No	Yes

\*2) Yes when used with rubber boot (CW9Z-D11, -D12)

### LED Specifications

Rated Insulation Voltage	250V			
Rated Operating Voltage	6V AC/DC	12V AC/DC	24V AC/DC	
Operating Voltage Range	6V AC/DC ±10%	12V AC/DC ±10%	24V AC/DC ±10%	
LED Module Part No.	CW-PAQ2	CW-PAQ3	CW-PAQ4	
Current Draw	AC	16 mA	7 mA	6 mA
	DC	12 mA	6 mA	6 mA
Life (reference value)	Approx. 30,000 hours (the illuminance is reduced to 50% of the initial intensity when used on complete DC at 25°C.)			
Internal Circuit				

### Push-in Contact Block (HW-P)

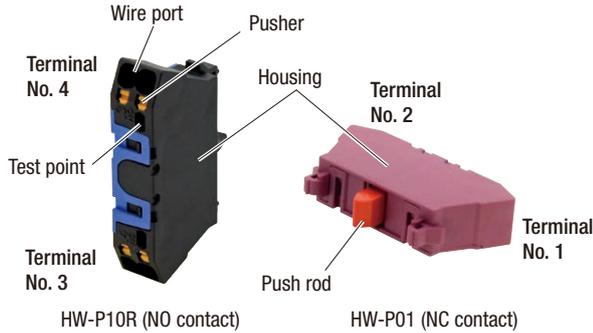

Contact	Single contact block		Double contact block		
	1NO	1NC	2NO	2NC	1NO-1NC
Part No.	HW-P10R	HW-P01	HW-PW2R0	HW-PW02	HW-PW1R1
Housing	Blue / Black	Purple red	Blue / Black	Purple red	Purple red / Blue
Push Rod	Black	Red	Black	Red	Gray
Contact No.	3-4	1-2	1st stage: 13-14 2nd stage: 23-24	1st stage: 11-12 2nd stage: 21-22	1st stage: 13-14 2nd stage: 21-22
Weight (approx.)	8g		16g		

### Specifications

Operating Temperature	Non-illuminated: -25 to +60°C (no freezing) LED illuminated: -25 to +55°C (no freezing)	
Operating Humidity	45 to 85% RH (no condensation)	
Storage Temperature	-40 to +80°C (no freezing)	
Contact Resistance	50 mΩ maximum (initial value)	
Insulation Resistance	100 MΩ minimum (500V DC megger)	
Overvoltage Category	II (IEC60664-1)	
Impulse Withstand Voltage	2.5kV (IEC60664-1 / IEC60947-5-1)	
Pollution Degree	3 (IEC60947-5-1)	
Vibration Resistance	Operating extremes: 5 to 55Hz, amplitude 0.5 mm Damage limits: 30 Hz, amplitude 1.5 mm	
Shock Resistance	Operating extremes: 100 m/s <sup>2</sup> Damage limits: 1000 m/s <sup>2</sup>	
Mechanical Life (minimum operations)	Pushbutton/Illuminated pushbutton Momentary: 2,000,000 (single contact block) 1,000,000 (double contact block) Maintained: 250,000(single contact block) 100,000(double contact block) Selector switch: 250,000 (single contact block) 100,000 (double contact block) Key selector switch: 250,000 (single contact block) 100,000 (double contact block)	
Electrical Life (*1) (minimum operations)	Specification 1	Single contact block: 50,000 Double contact block: 25,000
	Specification 2	Single contact block: 100,000 Double contact block: 50,000
Degree of Protection	Panel front: See Degree of Protection table on page 8 Terminal: IP20 (IEC 60529)	
Electrical Shock Protection	Class II (IEC61140)	
Terminal Style	Push-in terminal	
Bezel Material	Polyamide	
Recommended Tightening Torque for Locking Ring	1.2 N·m	

\*1) Switching frequency  
Momentary: 1800 operations/h  
Maintained: 900 operations/h

### Direct Opening of Key Selector Switch

Applicable Type	2-position (3NC)	3-position (2NC)
Minimum Operator Angle for Direct Opening Action	90°	45°
Minimum Operator Torque for Direct Opening Action	0.2 N·m	0.3 N·m
Maximum Operator Angle	90°	45°


### Weight (Examples)

Weight (approx.)	Illuminated Pushbutton	: 38g (CW1L-M1P20Q4, 2 contacts)
	Pushbutton	: 37g (CW1B-M1P30, 3 contacts) : 61g (CW1B-M1P33, 6 contacts)
	Pilot light	: 24g (CW1P)
	Selector Switch	: 40g (CW1S-2P30, 3 contacts) : 64g (CW1S-2P33, 6 contacts)
	Key Selector Switch	: 49g (CW1K-2AP30, 3 contacts) : 73g (CW1K-2AP33, 6 contacts)

### Mounting Hole Layout

(Dimensions in mm)

#### Panel Cut (IEC60947-5-1)

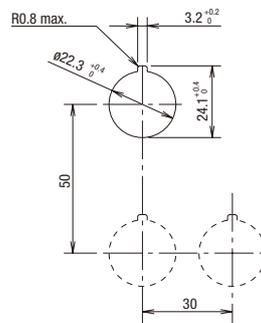

Note: Determine mounting centers in consideration of the operation, wiring, and testing terminals.

Pushbuttons

Assembled



Quantity: 1

Operator Style	Bezel Color	Operation	Contact Configuration	Part No.	⑤ Button Color Code
	Black	Momentary	1NO	CW1B-M1P10 ⑤	B (black) G (green) R (red) Y (yellow) S (blue) W (white)
			1NC	CW1B-M1P01 ⑤	
			1NO-1NC	CW1B-M1P11 ⑤	
			2NO	CW1B-M1P20 ⑤	
			2NC	CW1B-M1P02 ⑤	
			3NO	CW1B-M1P30 ⑤	
	Metallic	Momentary	1NO	CW4B-M1P10 ⑤	B (black) G (green) R (red) Y (yellow) S (blue) W (white)
			1NC	CW4B-M1P01 ⑤	
			1NO-1NC	CW4B-M1P11 ⑤	
			2NO	CW4B-M1P20 ⑤	
2NC			CW4B-M1P02 ⑤		
		3NO	CW4B-M1P30 ⑤		
	Black	Momentary	1NO	CW1B-M2P10 ⑤	B (black) G (green) R (red) Y (yellow) S (blue) W (white)
			1NC	CW1B-M2P01 ⑤	
			1NO-1NC	CW1B-M2P11 ⑤	
			2NO	CW1B-M2P20 ⑤	
	Metallic	Momentary	1NO	CW4B-M2P10 ⑤	B (black) G (green) R (red) Y (yellow) S (blue) W (white)
			1NC	CW4B-M2P01 ⑤	
			1NO-1NC	CW4B-M2P11 ⑤	
			2NO	CW4B-M2P20 ⑤	


- Pushbuttons with 1 contact block contain 2 dummy blocks. Pushbuttons with 2 contact blocks contain 1 dummy block.
- For maintained pushbuttons, select from sub-assembled units.

• For other specifications, select from sub-assembled units (P11).


Part No. Example

Assembled and sub-assembled unit

Assembled Part No. Example

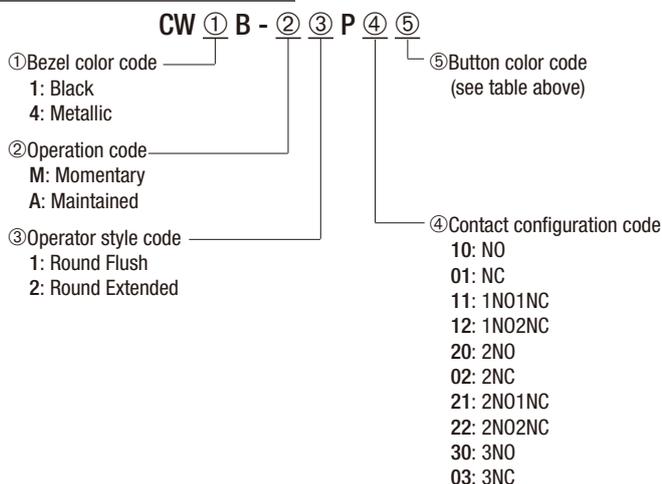

Sub-Assembled Operator unit

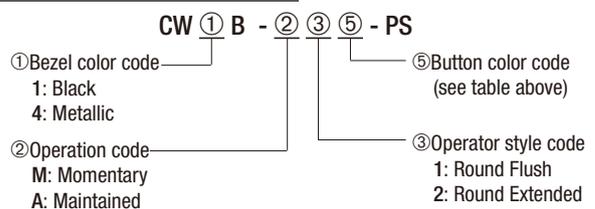

Sub-Assembled Contact unit




\*For available assembled products, see table above.

Pushbuttons

Sub-Assembled

When ordering, specify the sub-assembled part no. See page 10 for available assembled products.

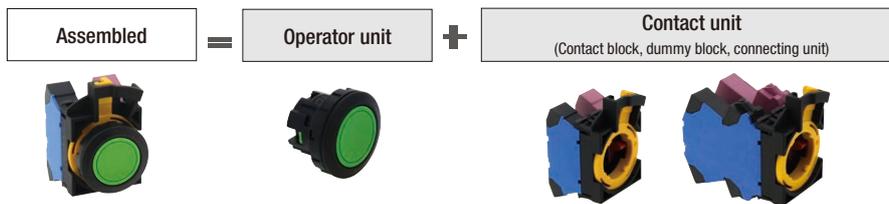

Name / Shape	Operation	Contact Configuration	<Reference> Assembled Part No. Example	⑤ Button Color Code		
Round Flush (Black)  (Metallic) 	Momentary	1NO	CW①B-M1P10⑤	B (black) G (green) R (red) Y (yellow) S (blue) W (white)		
		1NC	CW①B-M1P01⑤			
		1NO-1NC	CW①B-M1P11⑤			
		1NO-2NC	CW①B-M1P12⑤			
		2NO	CW①B-M1P20⑤			
		2NC	CW①B-M1P02⑤			
		2NO-1NC	CW①B-M1P21⑤			
		2NO-2NC	CW①B-M1P22⑤			
		3NO	CW①B-M1P30⑤			
		3NC	CW①B-M1P03⑤			
		Maintained	1NO		CW①B-A1P10⑤	
			1NC		CW①B-A1P01⑤	
	1NO-1NC		CW①B-A1P11⑤			
	1NO-2NC		CW①B-A1P12⑤			
	2NO		CW①B-A1P20⑤			
	2NC		CW①B-A1P02⑤			
	2NO-1NC		CW①B-A1P21⑤			
	2NO-2NC		CW①B-A1P22⑤			
	3NO		CW①B-A1P30⑤			
	3NC		CW①B-A1P03⑤			
	Round Extended (Black)  (Metallic) 		Momentary		1NO	CW①B-M2P10⑤
					1NC	CW①B-M2P01⑤
		1NO-1NC			CW①B-M2P11⑤	
		1NO-2NC			CW①B-M2P12⑤	
2NO		CW①B-M2P20⑤				
2NC		CW①B-M2P02⑤				
2NO-1NC		CW①B-M2P21⑤				
2NO-2NC		CW①B-M2P22⑤				
3NO		CW①B-M2P30⑤				
3NC		CW①B-M2P03⑤				
Maintained		1NO		CW①B-A2P10⑤		
		1NC		CW①B-A2P01⑤		
		1NO-1NC	CW①B-A2P11⑤			
		1NO-2NC	CW①B-A2P12⑤			
		2NO	CW①B-A2P20⑤			
		2NC	CW①B-A2P02⑤			
		2NO-1NC	CW①B-A2P21⑤			
		2NO-2NC	CW①B-A2P22⑤			
		3NO	CW①B-A2P30⑤			
		3NC	CW①B-A2P03⑤			

<Sub-Assembled> Part No.

Quantity: 1

Operator Unit		Contact unit					
Name / Shape	Part No.	Shape	Contact Configuration	Part No.			
Round Flush (Black)  (Metallic) 	CW①B-M1⑤-PS           CW①B-A1⑤-PS		1NO	CW-CNP10			
			1NC	CW-CNP01			
			1NO-1NC	CW-CNP11			
			1NO-2NC	CW-CNP12			
			2NO	CW-CNP20			
			2NC	CW-CNP02			
			2NO-1NC	CW-CNP21			
			2NO-2NC	CW-CNP22			
			3NO	CW-CNP30			
			3NC	CW-CNP03			
			Round Extended (Black)  (Metallic) 	CW①B-M2⑤-PS           CW①B-A2⑤-PS		1NO	CW-CNP10
						1NC	CW-CNP01
1NO-1NC	CW-CNP11						
1NO-2NC	CW-CNP12						
2NO	CW-CNP20						
2NC	CW-CNP02						
2NO-1NC	CW-CNP21						
2NO-2NC	CW-CNP22						
3NO	CW-CNP30						
3NC	CW-CNP03						

• Specify a bezel color in place of ① in the part no.

Color Code	Bezel Color
1	Black
4	Metallic

• Specify a button color code in place of ⑤ in the part no.  
 B (black), G (green), R (red), Y (yellow), S (blue), W (white)


Part No./ mounting positions of contact units: page 30.

Pushbuttons Dimensions


All dimensions in mm

Round Flush

1 to 3-contacts

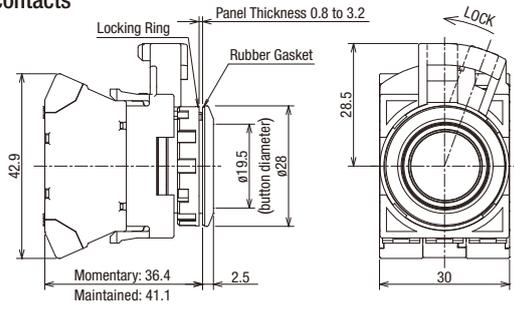


4-contacts

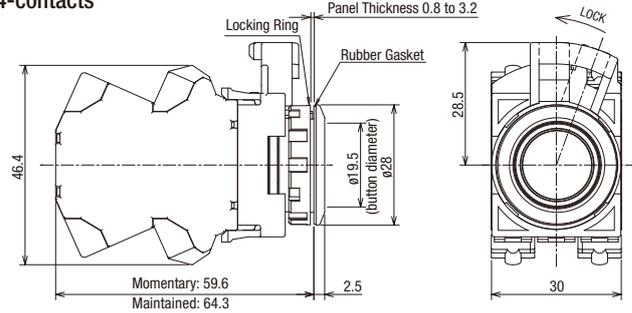


Round Extended

1 to 3-contacts

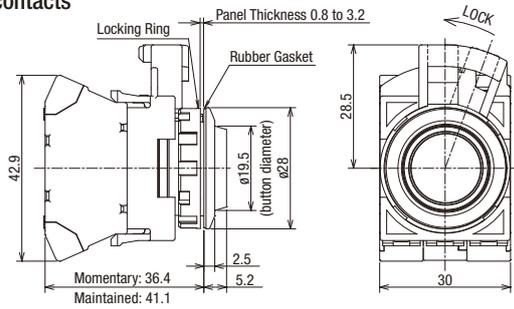

4-contacts

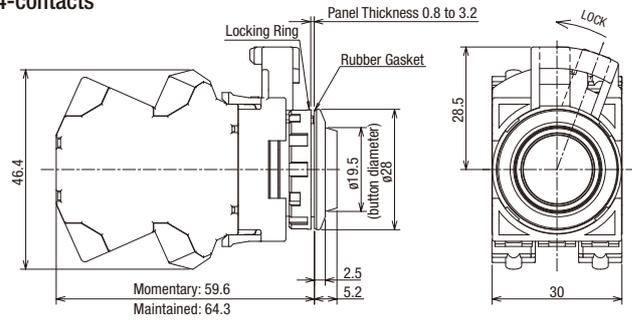

- See page 9 for mounting hole layout.

Illuminated Pushbuttons (Round Flush / Round Extended)

Assembled



Quantity: 1

Operator Style	Bezel Color	Operation	Rated Operating Voltage	Contact Configuration	Part No.	⑥ Illumination Color Code
Round Flush   	Black	Momentary	12V AC/DC	1NO	CW1L-M1P10Q3 ⑥	R (red) G (green) Y (yellow) A (amber) S (blue) PW (pure white)
			24V AC/DC	1NO	CW1L-M1P10Q4 ⑥	
				1NC	CW1L-M1P01Q4 ⑥	
				1NO-1NC	CW1L-M1P11Q4 ⑥	
				2NO	CW1L-M1P20Q4 ⑥	
	Metallic	Momentary	12V AC/DC	1NO	CW4L-M1P10Q3 ⑥	
			24V AC/DC	1NO	CW4L-M1P10Q4 ⑥	
				1NC	CW4L-M1P01Q4 ⑥	
				1NO-1NC	CW4L-M1P11Q4 ⑥	
				2NO	CW4L-M1P20Q4 ⑥	
Metallic	Maintained	24V AC/DC	1NO	CW4L-A1P10Q4 ⑥		
			1NC	CW4L-A1P01Q4 ⑥		
			1NO-1NC	CW4L-A1P11Q4 ⑥		
			2NO	CW4L-A1P20Q4 ⑥		
			Round Extended   	Black	Momentary	12V AC/DC
24V AC/DC	1NO	CW1L-M2P10Q4 ⑥				
	1NC	CW1L-M2P01Q4 ⑥				
	1NO-1NC	CW1L-M2P11Q4 ⑥				
	2NO	CW1L-M2P20Q4 ⑥				
Metallic	Momentary	24V AC/DC		1NO	CW4L-M2P10Q4 ⑥	
				1NC	CW4L-M2P01Q4 ⑥	
				1NO-1NC	CW4L-M2P11Q4 ⑥	
				2NO	CW4L-M2P20Q4 ⑥	


- Specify an illumination color code in place of ⑥ in the part no.
- Illuminated pushbuttons are built-in with an LED unit. For maintenance LED units, see page 32.
- Illuminated pushbuttons with 1 contact block contain 1 dummy block.
- Printed film can be inserted. For size details, see page 36.

• For other specifications, select from sub-assembled units (page 14).


Part No. Example

Assembled and sub-assembled unit


Assembled Part No. Example

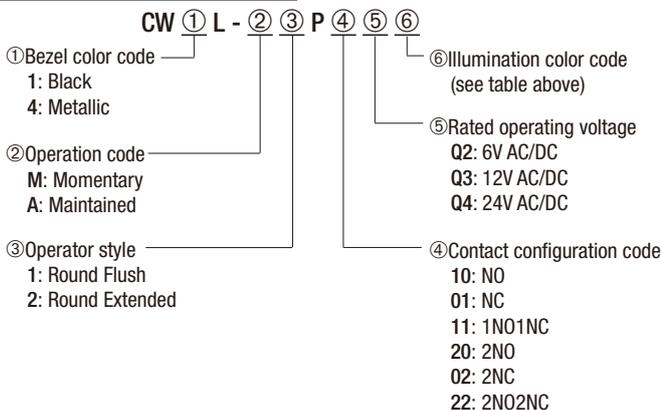

Sub-Assembled Operator unit

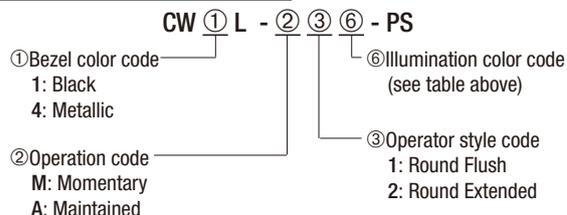

Sub-Assembled Contact Unit (Illuminated unit)

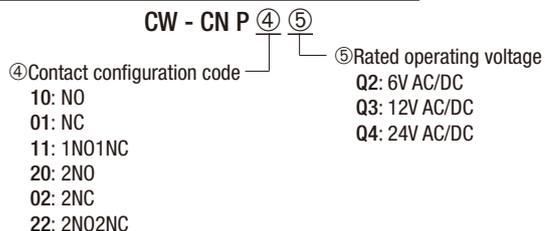


\*For available assembled products, see table above.

Illuminated Pushbuttons (Round Flush / Round Extended)

Sub-Assembled

When ordering, specify the sub-assembled part no. See page 13 for available assembled products.

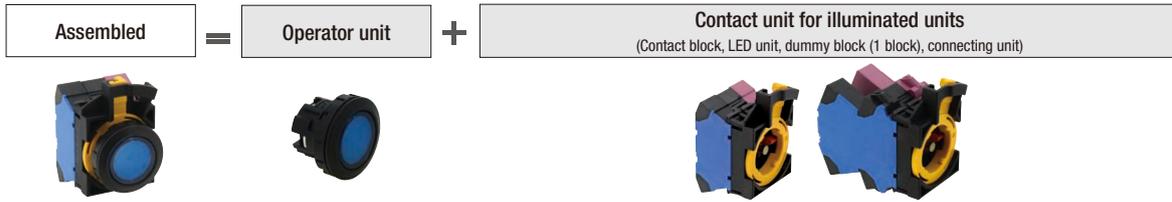

<Sub-Assembled> Part No.

Quantity: 1

Name / Shape	Operation	Contact Configuration	<Reference> Assembled Part No. Example	⑥ Illumination Color Code
Round Flush (Black)  (Metallic)	Momentary	1NO	CW①L-M1P10Q4⑥	R G Y A S P W
		1NC	CW①L-M1P01Q4⑥	
		1NO-1NC	CW①L-M1P11Q4⑥	
		2NO	CW①L-M1P20Q4⑥	
		2NC	CW①L-M1P02Q4⑥	
	2NO-2NC	CW①L-M1P22Q4⑥		
	Maintained	1NO	CW①L-A1P10Q4⑥	
		1NC	CW①L-A1P01Q4⑥	
		1NO-1NC	CW①L-A1P11Q4⑥	
		2NO	CW①L-A1P20Q4⑥	
2NC		CW①L-A1P02Q4⑥		
2NO-2NC	CW①L-A1P22Q4⑥			
Round Extended (Black)  (Metallic)	Momentary	1NO	CW①L-M2P10Q4⑥	R G Y A S P W
		1NC	CW①L-M2P01Q4⑥	
		1NO-1NC	CW①L-M2P11Q4⑥	
		2NO	CW①L-M2P20Q4⑥	
		2NC	CW①L-M2P02Q4⑥	
	2NO-2NC	CW①L-M2P22Q4⑥		
	Maintained	1NO	CW①L-A2P10Q4⑥	
		1NC	CW①L-A2P01Q4⑥	
		1NO-1NC	CW①L-A2P11Q4⑥	
		2NO	CW①L-A2P20Q4⑥	
2NC		CW①L-A2P02Q4⑥		
2NO-2NC	CW①L-A2P22Q4⑥			

Operator Unit	
Name / Shape	Part No.
Round Flush (Black)	CW①L-M1⑥-PS
Round Extended (Black)	CW①L-M2⑥-PS
	CW①L-A1⑥-PS
	CW①L-A2⑥-PS

Contact Unit for illuminated units		
Shape	Contact Configuration	Part No.
	1NO	CW-CNP10 ⑤
	1NC	CW-CNP01 ⑤
	1NO-1NC	CW-CNP11 ⑤
	2NO	CW-CNP20 ⑤
	2NC	CW-CNP02 ⑤
	2NO-2NC	CW-CNP22 ⑤
	1NO	CW-CNP10 ⑤
	1NC	CW-CNP01 ⑤
	1NO-1NC	CW-CNP11 ⑤
	2NO	CW-CNP20 ⑤
	2NC	CW-CNP02 ⑤
	2NO-2NC	CW-CNP22 ⑤

• Specify a bezel color in place of ① in the part no.

Color Code	Bezel Color
1	Black
4	Metallic

• Specify an illumination color code in place of ⑥ in the Part No.

R (red), G (green), Y (yellow), A (amber), S (blue), PW (pure white)

• The assembled part no. above is when the operating voltage is 24V AC/DC.

• Specify an operating voltage code in place of ⑤ in the part no. Select from the table below.

Operating voltage code	Operating voltage
Q2	6V AC/DC
Q3	12V AC/DC
Q4	24V AC/DC


Part No./ mounting positions of contact units: page 31.

Illuminated Pushbuttons (Round Flush / Round Extended) Dimensions


All dimensions in mm

Round Flush

1 to 2-contacts

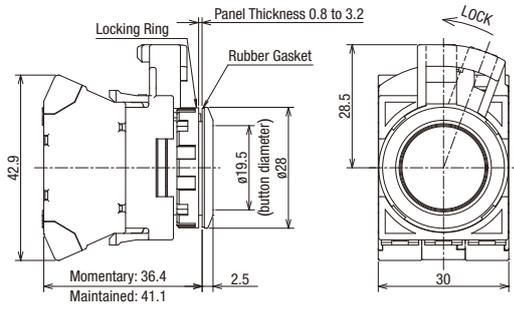


3 to 4-contacts

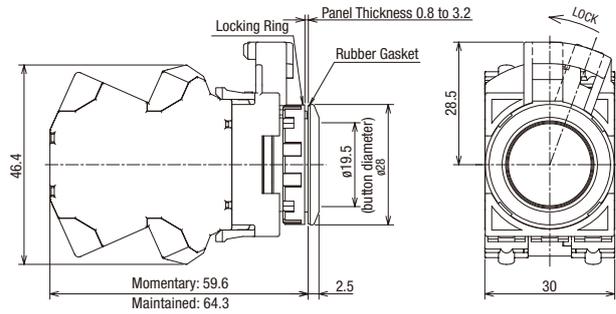


Round Extended

1 to 2-contacts

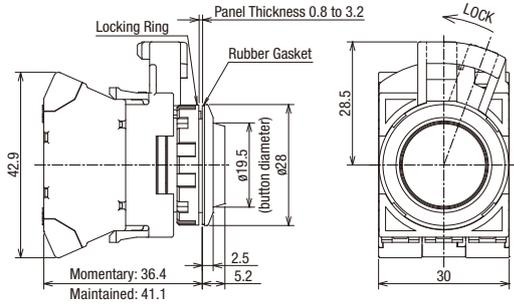

3 to 4-contacts

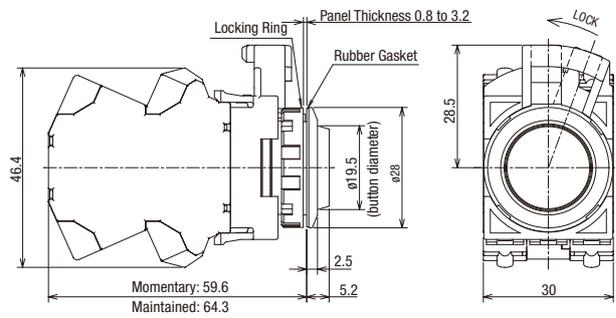

- See page 9 for mounting hole layout.

Pilot Lights (Round Flush / Round Extended)

Assembled



Quantity: 1

Operator Style	Bezel Color	Rated Operating Voltage	Part No.	④ Illumination Color Code
Round Flush   Black bezel      Metallic bezel	Black	12V AC/DC	CW1P-1PQ3 ④	R (red) G (green) Y (yellow) A (amber) S (blue) PW (pure white)
		24V AC/DC	CW1P-1PQ4 ④	
	Metallic	12V AC/DC	CW4P-1PQ3 ④	
		24V AC/DC	CW4P-1PQ4 ④	
Round Extended   Black bezel      Metallic bezel	Black	12V AC/DC	CW1P-2PQ3 ④	R (red) G (green) Y (yellow) A (amber) S (blue) PW (pure white)
		24V AC/DC	CW1P-2PQ4 ④	
	Metallic	12V AC/DC	CW4P-2PQ3 ④	
		24V AC/DC	CW4P-2PQ4 ④	


- Specify an illumination color code in place of ④ in the part no.
- Pilot lights are built-in with an LED unit. For maintenance LED units, see page 32.
- Pilot lights contain 2 dummy blocks.
- Printed film can be inserted. For size details, see page 36.

• For other specifications, select from sub-assembled units (P17).


Part No. Example

Assembled and sub-assembled unit

Assembled Part No. Example

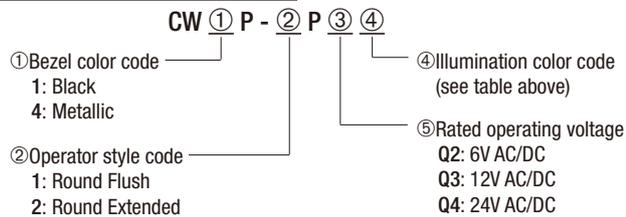


Sub-Assembled Operator unit

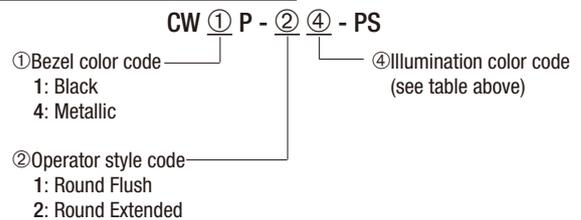

\*For available assembled products, see table above.


Sub-Assembled Contact unit

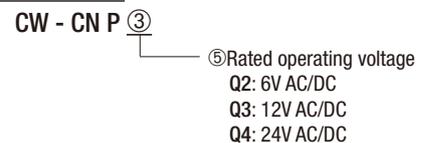

Pilot Lights (Round Flush / Round Extended)

**Sub-Assembled**

When ordering, specify the sub-assembled part no. See page 16 for available assembled products.

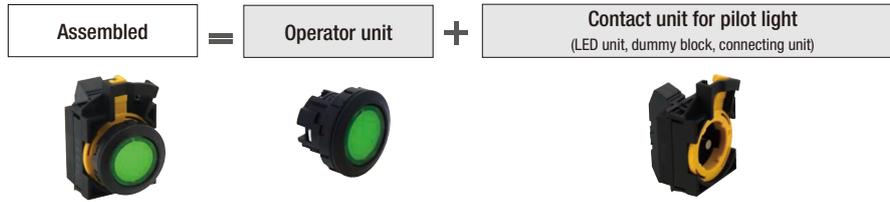

<Sub-Assembled> Part No.

Quantity: 1

Name / Shape	Rated Operating Voltage (AC/DC)	<Reference> Assembled Part No. Example	④ Illumination Color Code	<Sub-Assembled> Part No.		Contact Unit for Pilot Lights		
				Name / Shape	Part No.	Shape	Rated Operating Voltage	Part No.
Round Flush (Black)  (Metallic) 	6V	CW①P-1PQ2④	R (red) G (green) Y (yellow) A (amber) S (blue) PW (pure white)	Round Flush (Black) 	CW①P-1④-PS		6V	CW-CNPQ2
	12V	CW①P-1PQ3④		(Metallic) 			12V	CW-CNPQ3
	24V	CW①P-1PQ4④					24V	CW-CNPQ4
Round Extended (Black)  (Metallic) 	6V	CW①P-2PQ2④	R (red) G (green) Y (yellow) A (amber) S (blue) PW (pure white)	Round Extended (Black) 	CW①P-2④-PS		6V	CW-CNPQ2
	12V	CW①P-2PQ3④		(Metallic) 			12V	CW-CNPQ3
	24V	CW①P-2PQ4④					24V	CW-CNPQ4

• Specify a bezel color in place of ① in the part no.

Color Code	Bezel Color
1	Black
4	Metallic


• See page 31 for contact details and mounting position.

• Specify an illumination color code in place of ④ in the part no.  
R (red), G (green), Y (yellow), A (amber), S (blue), PW (pure white)


Dimensions

All dimensions in mm

Round Flush

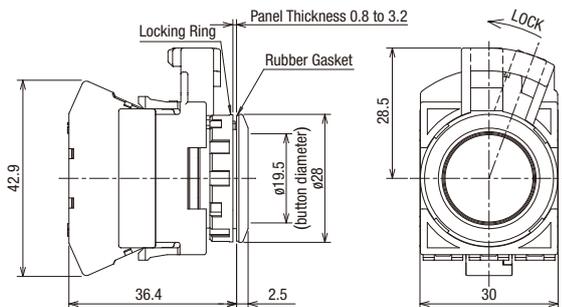

Round Extended

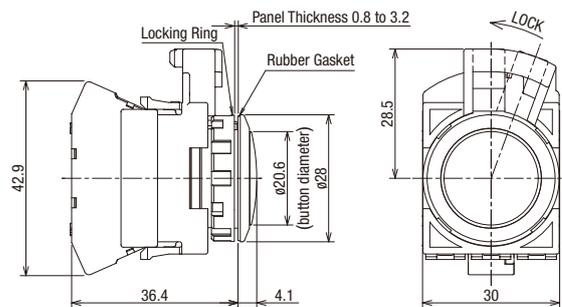

• See page 9 for mounting hole layout.

Part No./ mounting positions of contact units: page 31.

Selector Switches (Knob Operator)

Assembled



Lever operators are available as sub-assembled units only.


Quantity: 1

Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			① Bezel Color	Maintained		
			Mounting Position	Contact	1	2			$\begin{matrix} 1 & & 2 \\ & \vee & \\ & & \end{matrix}$		
Knob Operator (Black)  (Metallic)	90° 2-position	1NO (10)	(1)	NO		●		1: Black 4: Metallic	CW①S-2P10	—	
			(2)	—	Dummy						
			(3)	—	Dummy						
		1NO-1NC (11)	(1)	NO		●				CW①S-2P11	—
			(2)	—	Dummy						
			(3)	NC	●						
		2NO (20)	(1)	NO			●			CW①S-2P20	—
			(2)	—	Dummy						
			(3)	NO			●				
	No. of Positions  45° 3-position	No. of Positions	2NO (20)	(1)	NO	●			1: Black 4: Metallic	CW①S-3P20	CW①S-33P20
				(2)	—	Dummy					
				(3)	NO			●			
2NO-1NC (21)			(1)	NO	●					CW①S-3P21	—
			(2)	NO	●		●				
			(3)	NC	●						
2NO-1NC (21N1)		(1)	NO	●				—	CW①S-33P21N1		
		(2)	NC		●						
		(3)	NO			●					
No. of Positions		Contact Configuration (Code)	Contact Block	Mounting Position	Contact	Operator Position			① Bezel Color	Maintained	Spring return two-way
						$\begin{matrix} 1 & 0 & 2 \\ & \vee & \\ & & \end{matrix}$				$\begin{matrix} 1 & 0 & 2 \\ & \vee & \\ & & \end{matrix}$	

- Specify a bezel color in place of ① in the part no.
  - Selector switches with 1 contact block contain 2 dummy blocks. Selector switches with 2 contact blocks contain 1 dummy block.
- Note: Turn the operator to each position accurately.

• For other contact configuration or operation, select from sub-assembled units (page 19 to 21).

Contact Block Mounting Position

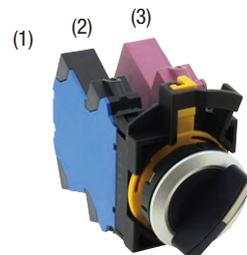

Selector Switches (Knob / Lever Operator) 2-position

Sub-Assembled

When ordering, specify the sub-assembled part no. See page 18 for available assembled products.



90° 2-position

Sub-Assembled Part No.

Quantity: 1

<Reference> Assembled Part No.							
No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position		Operator position code	
		Mounting Position	Contact	1	2	Maintained <sup>1</sup> / <sub>2</sub>	
90° 2-position	1NO (10)	(1)	NO		●	CW①S-2③P10	
		(2)	—	Dummy			
		(3)	—	Dummy			
	1NC (01)	(1)	—	Dummy			CW①S-2③P01
		(2)	—	Dummy			
		(3)	NC	●			
	1NO-1NC (11)	(1)	NO		●		CW①S-2③P11
		(2)	—	Dummy			
		(3)	NC	●			
	2NO (20)	(1)	NO		●	●	CW①S-2③P20
		(2)	—	Dummy			
		(3)	NO		●		
	2NC (02)	(1)	NC	●			CW①S-2③P02
		(2)	—	Dummy			
		(3)	NC	●			
	2NO-1NC (21)	(1)	NO		●	●	CW①S-2③P21
		(2)	NO		●	●	
		(3)	NC	●			
	1NO-2NC (12)	(1)	NO		●	●	CW①S-2③P12
		(2)	NC	●			
		(3)	NC	●			
	3NO (30)	(1)	NO		●	●	CW①S-2③P30
		(2)	NO		●	●	
		(3)	NO		●	●	
3NC (03)	(1)	NC	●			CW①S-2③P03	
	(2)	NC	●				
	(3)	NC	●				
2NO-2NC (22)	(1)	NONC	NO	●	●	CW①S-2③P22	
	(2)	—	Dummy				
	(3)	NONC	NO	●	●		
4NO (40)	(1)	2NO	NO	●	●	CW①S-2③P40	
	(2)	—	Dummy				
	(3)	2NO	NO	●	●		

Operator Unit Part No.		Contact Unit	
Name / Shape	Operator position code	Contact Configuration (Code)	Part No.
	Maintained <sup>1</sup> / <sub>2</sub>		
Knob Operator (Black)  (Metallic)  Lever operator (Black)  (Metallic)		1NO (10)	CW-CNP10
		1NC (01)	CW-CNP01
		1NO-1NC (11)	CW-CNP11
		2NO (20)	CW-CNP20
		2NC (02)	CW-CNP02
		2NO-1NC (21)	CW-CNP21
	CW①S-2③-PS	1NO-2NC (12)	CW-CNP12
		3NO (30)	CW-CNP30
		3NC (03)	CW-CNP03
		2NO-2NC (22)	CW-CNP22
		4NO (40)	CW-CNP40

- Specify a bezel color in place of ① in the part no.
- Specify an operator style code in place of ③ in the part no.

① Bezel color code

Code	Color
1	Black
4	Metallic

③ Operator style code

Code	Shape
Blank	Knob
L	Lever

- For part no. other than maintained position, see Part No. Example on page 21.

• For contact block mounting position, see page 30.

• White indicator on black body

Note: Turn the operator to each position accurately.

Part No./ mounting positions of contact units: page 30.

Selector Switches (Knob / Lever Operator) 3-position

Sub-Assembled

When ordering, specify the sub-assembled part no. See page 18 for available assembled products.



45° 3-position

No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			Operator position code
		Mounting Position	Contact	1	0	2	Maintained $\begin{matrix} 1 & 0 & 2 \\ & \swarrow & \searrow \end{matrix}$
							<Reference> Assembled Part No.
45° 3-position	1NO-1NC (11)	(1)	NO	●			CW①S-3③P11
		(2)	—		Dummy		
		(3)	NC		■		
	1NO-1NC (11N1)	(1)	NC			■	CW①S-3③P11N1
		(2)	—		Dummy		
		(3)	NO			●	
	1NO-1NC (11N2)	(1)	NO	●			CW①S-3③P11N2
		(2)	NC		●		
		(3)	—		Dummy		
	1NO-1NC (11N3)	(1)	—		Dummy		CW①S-3③P11N3
		(2)	NC			●	
		(3)	NO			●	
	1NO-1NC (11N4)	(1)	—		Dummy		CW①S-3③P11N4
		(2)	NO	●		●	
		(3)	NC		■		
	2NO (20)	(1)	NO	●			CW①S-3③P20
		(2)	—		Dummy		
		(3)	NO			●	
	2NO (20N1)	(1)	—		Dummy		CW①S-3③P20N1
		(2)	NO	●		●	
		(3)	NO			●	
	2NC (02)	(1)	NC			■	CW①S-3③P02
		(2)	—		Dummy		
		(3)	NC		■		
2NC (02N1)	(1)	—		Dummy		CW①S-3③P02N1	
	(2)	NC			●		
	(3)	NC		■			
2NO-1NC (21)	(1)	NO	●			CW①S-3③P21	
	(2)	NO	●		●		
	(3)	NC		■			
2NO-1NC (21N1)	(1)	NO	●			CW①S-3③P21N1	
	(2)	NC		●			
	(3)	NO			●		
1NO-2NC (12)	(1)	NO	●			CW①S-3③P12	
	(2)	NC			●		
	(3)	NC		■			
1NO-2NC (12N1)	(1)	NC			■	CW①S-3③P12N1	
	(2)	NO	●		●		
	(3)	NC		■			
3NO (30)	(1)	NO	●			CW①S-3③P30	
	(2)	NO	●		●		
	(3)	NO	●		●		

- Specify a bezel color in place of ① in the part no.
- Specify an operator style code in place of ③ in the part no.

① Bezel color code

Code	Color
1	Black
4	Metallic

③ Operator style code

Code	Shape
Blank	Knob
L	Lever

Sub-Assembled Part No.

Quantity: 1

Operator Unit Part No.		Contact Unit	
Name / Shape	Operator position code	Contact Configuration (Code)	Part No.
	Maintained $\begin{matrix} 1 & 0 & 2 \\ & \swarrow & \searrow \end{matrix}$		
	Part No.		
Knob Operator (Black)  (Metallic) 		1NO-1NC (11)	CW-CNP11
		1NO-1NC (11N1)	CW-CNP11N1
		1NO-1NC (11N2)	CW-CNP11N2
		1NO-1NC (11N3)	CW-CNP11N3
Lever operator (Black)  (Metallic) 		1NO-1NC (11N4)	CW-CNP11N4
		2NO (20)	CW-CNP20
		2NO (20N1)	CW-CNP20N1
		2NC (02)	CW-CNP02
		2NC (02N1)	CW-CNP02N1
		2NO-1NC (21)	CW-CNP21
		2NO-1NC (21N1)	CW-CNP21N1
		1NO-2NC (12)	CW-CNP12
		1NO-2NC (12N1)	CW-CNP12N1
		3NO (30)	CW-CNP30

- For Part No. other than maintained position, see Part No. Example on page 21.
  - For contact block mounting position, see page 30.
  - White indicator on black body
- Note: Turn the operator to each position accurately.

Part No./ mounting positions of contact units: page 30.

Selector Switches (Knob / Lever Operator) 3-position

45° 3-position

<Reference> Assembled Part No.								
No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			Operator position code	
		Mounting Position	Contact	1	0	2		
45° 3-position	3NC (03)	(1)	NC		●		CW①S-3③P03	
		(2)	NC			●		
		(3)	NC	●				
	2NO-2NC (22)	(1)	NONC	NO NC	●			CW①S-3③P22
		(2)	—	—			Dummy	
		(3)	NONC	NO NC			●	
	4NO (40)	(1)	2NO	NO NO	●			CW①S-3③P40
		(2)	—	—			Dummy	
		(3)	2NO	NO NO			●	
	2NO-2NC (22N2)	(1)	2NC	NC NC		●		CW①S-3③P22N2
		(2)	—	—			Dummy	
		(3)	2NO	NO NO			●	

- Specify a bezel color in place of ① in the part no.
- Specify an operator style code in place of ③ in the part no.

① Bezel color code

Code	Color
1	Black
4	Metallic

③ Operator style code

Code	Shape
Blank	Knob
L	Lever


Sub-Assembled Part No.

Quantity: 1

Operator Unit Part No.		Contact Unit	
Name / Shape	Operator position code	Contact Configuration (Code)	Part No.
	Maintained 1 0 2		
Part No.			
Knob Operator (Black)		3NC (03)	CW-CNP03
(Metallic)		2NO-2NC (22)	CW-CNP22
Lever operator (Black)	CW①S-3③-PS	4NO (40)	CW-CNP40
(Metallic)		2NO-2NC (22N2)	CW-CNP22N2

- For Part No. other than maintained position, see Part No. Example below.
  - For contact block mounting position, see page 30.
  - White indicator on black body
- Note: Turn the operator to each position accurately.

Contact Block Mounting Position



Part No. Example / Part No. Development

Assembled and sub-assembled unit

Assembled

CW ① S - ② ③ P ④

- ① Bezel Color  
1: Black  
4: Metallic
  - ② Operator position code  
2: 2-position, maintained  
21: 2-position, spring return from right  
3: 3-position, maintained  
31: 3-position, spring return from right  
32: 3-position, spring return from left  
33: 3-position, spring return two way
  - ③ Operator style code  
Blank: Knob Operator  
L: Lever Operator
  - ④ Contact configuration code (see page 19 to 21)
- \* For available assembled products, see table on page 18.

② Operator position code

(90° -2-position)	
2 Maintained 	21 Spring Return from Right 

(45° -3-position)			
3 Maintained 	31 Spring Return from Right 	32 Spring Return from left 	33 Spring Return two way 

Sub-Assembled Operator unit

CW ① S - ② ③ - PS

- ① Bezel color  
1: Black  
4: Metallic
- ② Operator position code  
2: 2-position, maintained  
21: 2-position, spring return from right  
3: 3-position, maintained  
31: 3-position, spring return from right  
32: 3-position, spring return from left  
33: 3-position, spring return two way
- ③ Operator style code  
Blank: Knob Operator  
L: Lever Operator

Sub-Assembled Contact unit

CW - CN P ④


- ④ Contact configuration code (see page 19 to 21)

Selector Switches (Knob / Lever Operator) Dimensions


All dimensions in mm

Knob Operator

1 to 3-contacts

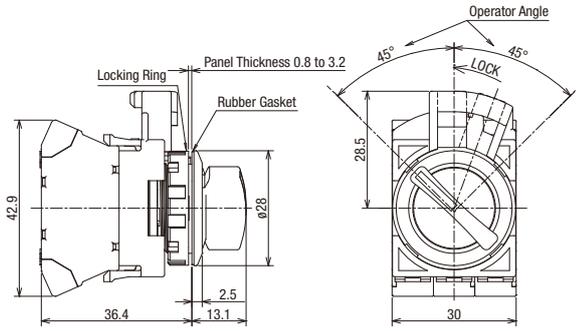


4-contacts

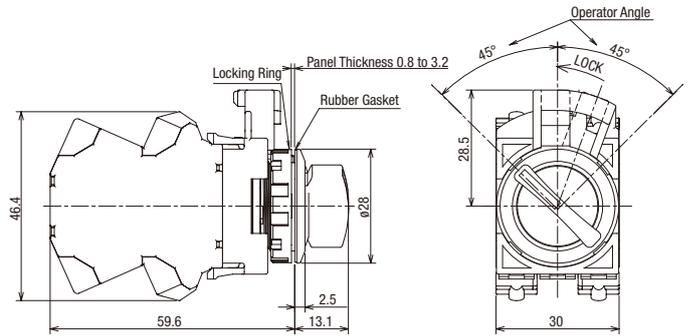


Lever Operator

1 to 3-contacts

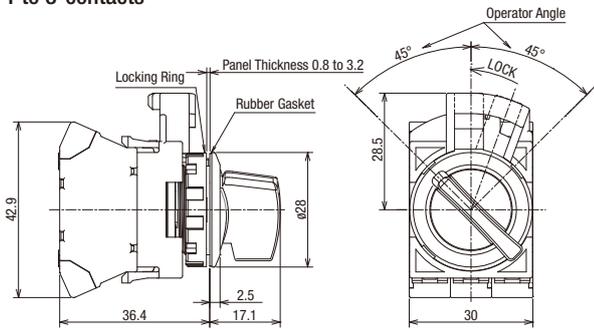

4-contacts

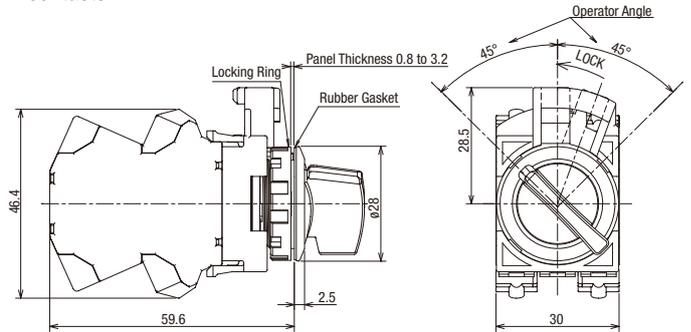

• See page 9 for mounting hole layout.

Key Selector Switches

Assembled



Quantity: 1

Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			① Bezel Color	Maintained 1 2	
			Mounting Position	Contact	1	2				
CW1K Black  Metallic	90° 2-position	1NO (10)	(1)	NO		●		1: Black 4: Metallic	CW⓪K-2AP10	
			(2)	—	Dummy					
			(3)	—	Dummy					
		1NO-1NC (11)	(1)	NO		●				CW⓪K-2⓪P11
			(2)	—	Dummy					
			(3)	NC	●					
		2NO (20)	(1)	NO		●				CW⓪K-2⓪P20
			(2)	—	Dummy					
			(3)	NO		●				
		2NO-1NC (21)	(1)	NO		●				CW⓪K-2⓪P21
			(2)	NO		●				
			(3)	NC	●					
45° 3-position	No. of Positions	2NO-1NC (21)	(1)	NO	●			1: Black 4: Metallic	Maintained 1 0 2	
			(2)	NO	●		●			
			(3)	NC	●					
		Contact Block		Operator Position			① Bezel Color			
		Mounting Position	Contact	1	0	2				

- For contact block mounting position, see the figure on the right.
- Two keys are supplied. Key cylinder material: Metal
- Key selector switches with 1 contact block contain 2 dummy blocks. Key selector switches with 2 contact blocks contain 1 dummy block.
- Specify a bezel color in place of ① in the part no.
- Specify a key removal position in place of ③ in the part no.

- Besides the standard key (key number 0H), six other keys are also available. See page 27 for details.

• For other contact configuration or operation, select from sub-assembled units (P24 to 26).

③ Key removal position

90° 2-position

Key Retained Position (Cam code: blank)	
A: Key removable in all positions 	B: Key removable at left 

- ①②: Key retained position ①②: Key retained position


45° 3-position

Key Retained Position		
A: Key removable in all positions 	B: Key removable at left / center 	H: Key removable at right 

- ①①②: Key retained position ①①②: Key retained position

Note: The key cannot be removed in a spring return position.

Contact Block Mounting Position

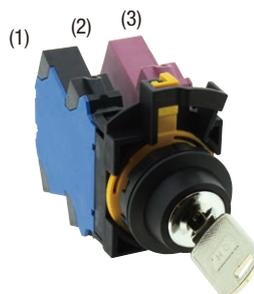

Key Selector Switches

Sub-Assembled

When ordering, specify the sub-assembled part no. See page 23 for available assembled products.



90° 2-position

Sub-Assembled Part No.

Quantity: 1

90° 2-position							Sub-Assembled Part No.		Contact Unit						
No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position		① Bezel Color	Operator Unit Part No.		Contact Unit						
		Mounting Position	Contact	1	2		Name / Shape	Operator position code		Contact Configuration (Code)	Part No.				
								Maintained	1 2			Part No.			
90° 2-position	1NO (10)	(1)	NO		●	1: Black 4: Metallic	Black 	Metallic 	CW①K-2③P10	1NO (10)	CW-CNP10				
		(2)	—	Dummy								CW①K-2③P01	1NC (01)	CW-CNP01	
		(3)	—	Dummy											CW①K-2③P11
	1NC (01)	(1)	—	Dummy						CW①K-2③P20	2NO (20)	CW-CNP20			
		(2)	—	Dummy									CW①K-2③P02	2NC (02)	
		(3)	NC	●											CW①K-2③P21
	2NO (20)	(1)	NO		●					CW①K-2③P12	1NO-2NC (12)	CW-CNP12			
		(2)	—	Dummy									CW①K-2③P30	3NO (30)	
		(3)	NO		●										CW①K-2③P03
	2NC (02)	(1)	NC	●						CW①K-2③P22	2NO-2NC (22)	CW-CNP22			
		(2)	—	Dummy									CW①K-2③P40	4NO (40)	
		(3)	NC	●											
	2NO-1NC (21)	(1)	NO		●										
		(2)	NO		●										
		(3)	NC	●											
	1NO-2NC (12)	(1)	NO		●										
		(2)	NC	●											
		(3)	NC	●											
	3NO (30)	(1)	NO		●										
		(2)	NO		●										
		(3)	NO		●										
	3NC (03)	(1)	NC	●											
		(2)	NC	●											
		(3)	NC	●											
2NO-2NC (22)	(1)	NONC	NO NC	●											
	(2)	—	Dummy												
	(3)	NONC	NO NC	●											
4NO (40)	(1)	2NO	NO NO	●											
	(2)	—	Dummy												
	(3)	2NO	NO NO	●											


- Two keys are supplied. Key cylinder material: Metal
  - For part no. other than maintained position, see Part No. Example on page 27.
  - Specify a bezel color in place of ① in the part no.
  - Specify a desired key removal position in place of ③ in the part no.
  - Specify a key number in place of ⑤ in the part no.
- See page 27 Part No. Example for details.
- On the spring-returned types, the key can be released only from the maintained position. On the maintained types, the key can be released from every position. Key retained positions are also available. See page 27 for details.

Part No./ mounting positions of contact units: page 30.

Key Selector Switches

Sub-Assembled

When ordering, specify the sub-assembled part no. See page 23 for available assembled products.

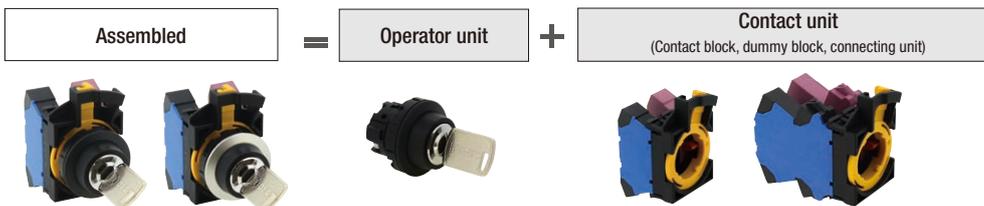

45° 3-position

Sub-Assembled Part No.

Quantity: 1

<Reference> Assembled Part No.							Operator Unit Part No.		Contact Unit																																																	
No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			Bezel Color	Operator position code	Name / Shape	Operator position code	Contact Configuration (Code)	Part No.																																														
		Mounting Position	Contact	1	0	2							Maintained	Maintained																																												
45° 3-position	1NO-1NC (11)	(1)	NO	●			1: Black 4: Metallic	CW①K-3③P11	Black	1 0 2	1NO-1NC (11)	CW-CNP11																																														
		(2)	—	Dummy																																																						
		(3)	NC	■																																																						
	1NO-1NC (11N1)	(1)	NC											CW①K-3③P11N1	Metallic	1 0 2	1NO-1NC (11N1)	CW-CNP11N1																																								
		(2)	—	Dummy																																																						
		(3)	NO		●																																																					
	1NO-1NC (11N2)	(1)	NO	●															CW①K-3③P11N2	Black	1 0 2	1NO-1NC (11N2)	CW-CNP11N2																																			
		(2)	NC		●																																																					
		(3)	—	Dummy																																																						
	1NO-1NC (11N3)	(1)	—	Dummy																				CW①K-3③P11N3	Metallic	1 0 2	1NO-1NC (11N3)	CW-CNP11N3																														
		(2)	NC		●																																																					
		(3)	NO			●																																																				
	1NO-1NC (11N4)	(1)	—	Dummy																									CW①K-3③P11N4	Black	1 0 2	1NO-1NC (11N4)	CW-CNP11N4																									
		(2)	NO	●		●																																																				
		(3)	NC	■																																																						
	2NO (20)	(1)	NO	●																														CW①K-3③P20	Metallic	1 0 2	2NO (20)	CW-CNP20																				
		(2)	—	Dummy																																																						
		(3)	NO			●																																																				
	2NO (20N1)	(1)	—	Dummy																																			CW①K-3③P20N1	Black	1 0 2	2NO (20N1)	CW-CNP20N1															
		(2)	NO	●		●																																																				
		(3)	NO			●																																																				
	2NC (02)	(1)	NC																																									CW①K-3③P02	Metallic	1 0 2	2NC (02)	CW-CNP02										
		(2)	—	Dummy																																																						
		(3)	NC	■																																																						
	2NC (02N1)	(1)	—	Dummy																																													CW①K-3③P02N1	Black	1 0 2	2NC (02N1)	CW-CNP02N1					
		(2)	NC		●																																																					
		(3)	NC	■																																																						
	2NO-1NC (21)	(1)	NO	●																																																		CW①K-3③P21	Metallic	1 0 2	2NO-1NC (21)	CW-CNP21
		(2)	NO	●		●																																																				
		(3)	NC	■																																																						
2NO-1NC (21N1)	(1)	NO	●				CW①K-3③P21N1	Black	1 0 2	2NO-1NC (21N1)	CW-CNP21N1																																															
	(2)	NC		●																																																						
	(3)	NO			●																																																					
1NO-2NC (12)	(1)	NO	●									CW①K-3③P12	Metallic	1 0 2	1NO-2NC (12)	CW-CNP12																																										
	(2)	NC		●																																																						
	(3)	NC	■																																																							
1NO-2NC (12N1)	(1)	NC															CW①K-3③P12N1	Black	1 0 2	1NO-2NC (12N1)	CW-CNP12N1																																					
	(2)	NO	●		●																																																					
	(3)	NC	■																																																							
3NO (30)	(1)	NO	●																			CW①K-3③P30	Metallic	1 0 2	3NO (30)	CW-CNP30																																
	(2)	NO	●		●																																																					
	(3)	NO			●																																																					
3NC (03)	(1)	NC																									CW①K-3③P03	Black	1 0 2	3NC (03)	CW-CNP03																											
	(2)	NC		●																																																						
	(3)	NC	■																																																							

- Two keys are supplied. Key cylinder material: Metal
  - For part no. other than maintained position, see Part No. Example on page 27.
  - Specify a bezel color in place of ① in the part no.
  - Specify a desired key removal position in place of ③ in the part no.
  - Specify a key number in place of ⑤ in the part no.
- See page 27 Part No. Example for details.

- On the spring-returned types, the key can be released only from the maintained position. On the maintained types, the key can be released from every position. Key retained positions are also available. See page 27 for details.

Part No./ mounting positions of contact units: page 30.

Key Selector Switches

**Sub-Assembled**

When ordering, specify the sub-assembled part no. See page 23 for available assembled products.

45° 3-position

<Reference> Assembled Part No.									
No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			① Bezel Color	Operator position code Maintained 1 0 2	
		Mounting Position	Contact	1	0	2			
45° 3-position	2NO-2NC (22)	(1)	NONC	NO NC	●	●	1: Black 4: Metallic	CW①K-3③P22	
		(2)	—	—	Dummy				
		(3)	NONC	NO NC	●	●			●
	4NO (40)	(1)	2NO	NO NO	●	●		CW①K-3③P40	
		(2)	—	—	Dummy				
		(3)	2NO	NO NO	●	●			●
	2NO-2NC (22N2)	(1)	2NC	NC NC	●	●		CW①K-3③P22N2	
		(2)	—	—	Dummy				
		(3)	2NO	NO NO	●	●			●


Sub-Assembled Part No.

Quantity: 1

Operator Unit Part No.		Contact Unit	
Name / Shape	Operator position code Maintained 1 0 2	Contact Configuration (Code)	Part No.
	Part No.		
Black 		2NO-2NC (22)	CW-CNP22
Metallic 	CW①K-3③-⑤-PS	4NO (40)	CW-CNP40
		2NO-2NC (22N2)	CW-CNP22N2

- Two keys are supplied. Key cylinder material: Metal
  - For part no. other than maintained position, see Part No. Example on page 27.
  - Specify a bezel color in place of ① in the part no.
  - Specify a desired key removal position in place of ③ in the part no.
  - Specify a key number in place of ⑤ in the part no.
- See page 27 Part No. Example for details.
- On the spring-returned types, the key can be released only from the maintained position. On the maintained types, the key can be released from every position. Key retained positions are also available. See page 27 for details.

Contact Block Mounting Position

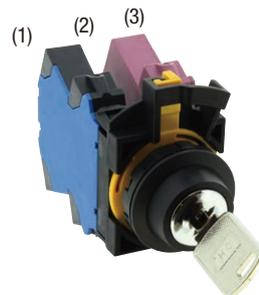


Part No./ mounting positions of contact units: page 30.

Key Selector Switches



Part No. Example / Part No. Development

Assembled and sub-assembled unit

Assembled Part No. Example


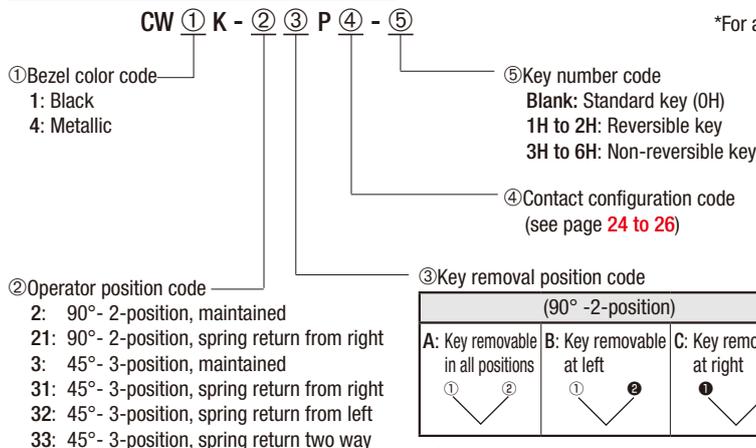


\*For available assembled products, see table on page 23.

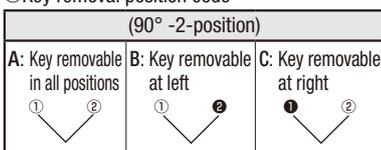

• Operator Position: ①①②: Key removal position  
①①②: Key retained position




• The key cannot be removed at the return position.

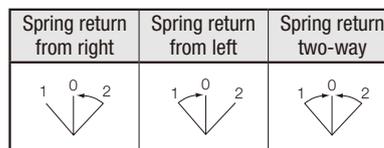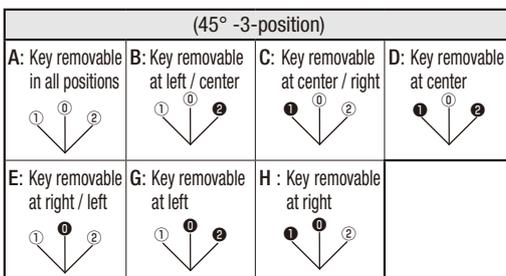

• Operator Position: ①①②: Key removal position  
①①②: Key retained position



• The key cannot be removed at the return position.

Sub-Assembled Operator unit

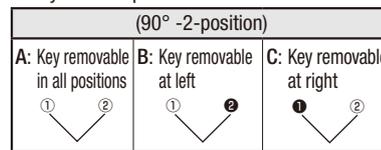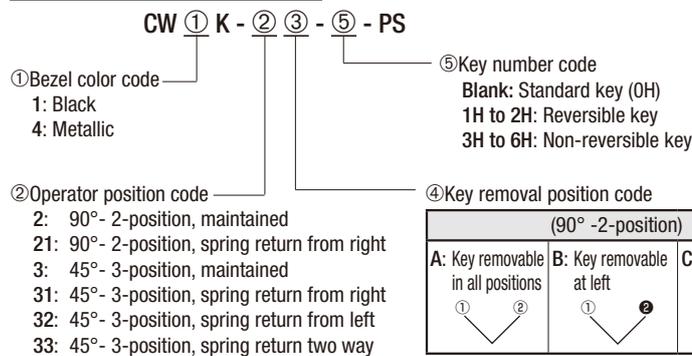

• Operator Position: ①①②: Key removal position  
①①②: Key retained position


• The key cannot be removed at the return position.

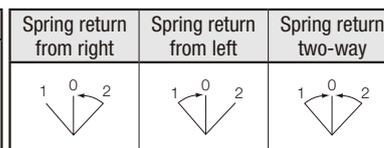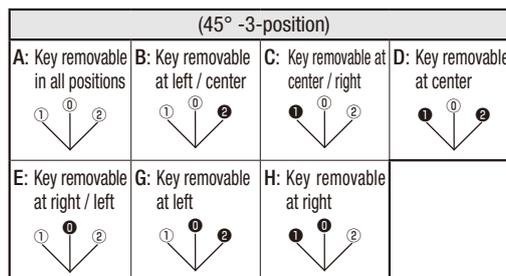

• Operator Position: ①①②: Key removal position  
①①②: Key retained position

• The key cannot be removed at the return position.

Sub-Assembled Contact unit




Key Selector Switches Dimensions


All dimensions in mm

Key Removal Position 2-position

1 to 3-contacts

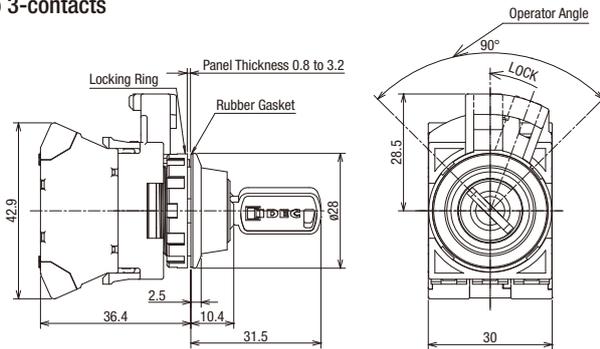


4-contacts

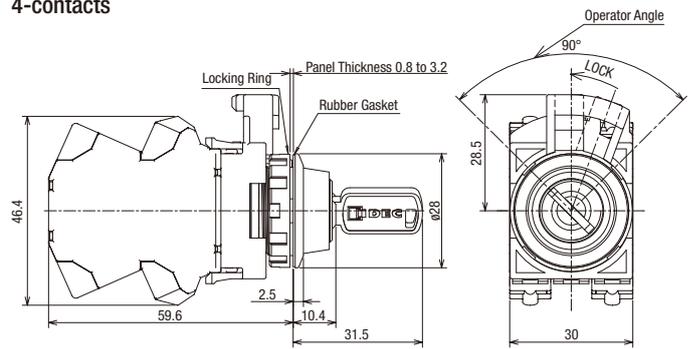


Key Removal Position 3-position

1 to 3-contacts

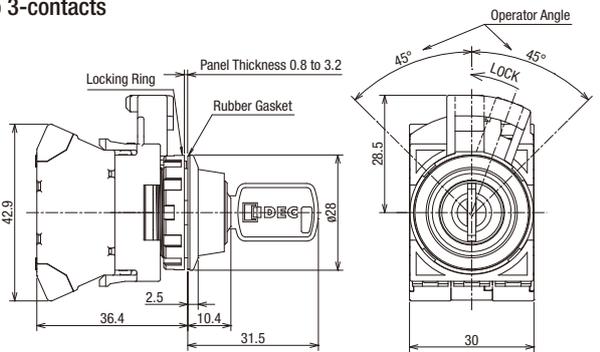


4-contacts

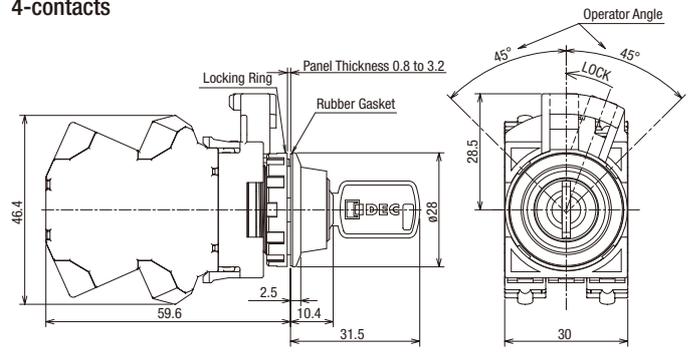


Key

• Reversible (0H to 2H)

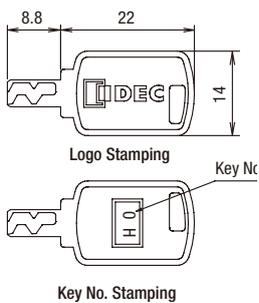


• Non-reversible (3H to 6H)

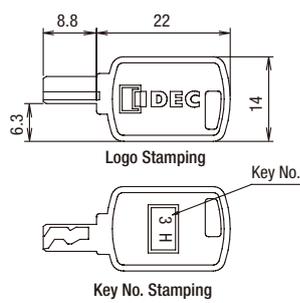

• See page 9 for mounting hole layout.


## Nameplates

All dimensions in mm

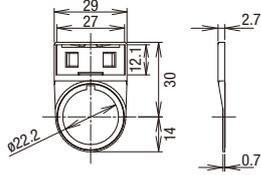Description		Material	Part No.	Quantity	Dimensions (mm)
	Legend				
CWAM	 <p>Order marking plate (HWNP) separately.</p>	Plastic (black)	CWAM	1	<ul style="list-style-type: none"> <li>Marking plate HWNP is necessary.</li> <li>Degree of protection: IP65</li> <li>Do not remove the gasket on the operator.</li> </ul> 

Note: Cannot be used with HW/FB series control box types.

## Making Plate

Description	Material	Part No.	Quantity	Dimensions (mm)
HWNP  Image: HWNP-35	Aluminum (black)	HWNP-□	10	<ul style="list-style-type: none"> <li>White legend on black background.</li> <li>Engraving area: W25, H7</li> </ul>  Thickness: 1.0 mm

• Specify a legend code in place of □ in the Part No.

## Legends


Code	Legend	Code	Legend
0	(blank)	4	STOP
1	ON	31	OFF-ON
2	OFF	35	HAND-AUTO
3	START	53	HAND-OFF-AUTO

Sub-Assembled

All dimensions in mm

Contact Unit Part No. / Contact Table

Quantity: 1

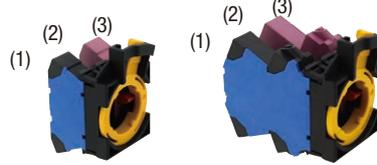

Contact Configuration (Code)	Part No.	Mounting Position	Contact
1NO (10)	CW-CNP10	(1)	1NO
		(2)	Dummy
		(3)	Dummy
1NC (01)	CW-CNP01	(1)	Dummy
		(2)	Dummy
		(3)	1NC
1NO1NC (11)	CW-CNP11	(1)	1NO
		(2)	Dummy
		(3)	1NC
1NO1NC (11N1)	CW-CNP11N1	(1)	1NC
		(2)	Dummy
		(3)	1NO
1NO1NC (11N2)	CW-CNP11N2	(1)	1NO
		(2)	1NC
		(3)	Dummy
1NO1NC (11N3)	CW-CNP11N3	(1)	Dummy
		(2)	1NC
		(3)	1NO
1NO1NC (11N4)	CW-CNP11N4	(1)	Dummy
		(2)	1NO
		(3)	1NC
2NO (20)	CW-CNP20	(1)	1NO
		(2)	Dummy
		(3)	1NO
2NO (20N1)	CW-CNP20N1	(1)	Dummy
		(2)	1NO
		(3)	1NO
2NC (02)	CW-CNP02	(1)	1NC
		(2)	Dummy
		(3)	1NC
2NC (02N1)	CW-CNP02N1	(1)	Dummy
		(2)	1NC
		(3)	1NC

Contact Configuration (Code)	Part No.	Mounting Position	Contact
2NO1NC (21)	CW-CNP21	(1)	1NO
		(2)	1NO
		(3)	1NC
2NO1NC (21N1)	CW-CNP21N1	(1)	1NO
		(2)	1NC
		(3)	1NO
1NO2NC (12)	CW-CNP12	(1)	1NO
		(2)	1NC
		(3)	1NC
3NO (30)	CW-CNP30	(1)	1NO
		(2)	1NO
		(3)	1NO
3NC (03)	CW-CNP03	(1)	1NC
		(2)	1NC
		(3)	1NC
2NO2NC (22)	CW-CNP22	(1)	1NO-1NC
		(2)	Dummy
		(3)	1NO-1NC
2NO2NC (22N2)	CW-CNP22N2	(1)	2NC
		(2)	Dummy
		(3)	2NO
4NO (40)	CW-CNP40	(1)	2NO
		(2)	Dummy
		(3)	2NO

• Contact unit includes a contact block, dummy block, and connecting unit.


**Note:** Specify the same contact configuration as the reference assembled part no.

## Sub-Assembled

All dimensions in mm

## Illuminated Contact Unit Part No. / Contact Table

Quantity: 1

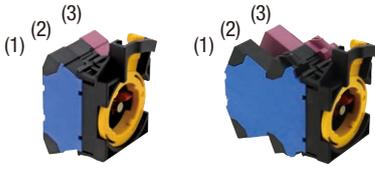


Contact Configuration (Code)	Rated Operating Voltage	Part No.	Mounting Position	Contact
1NO (10)	6V AC/DC	CW-CNP10Q2	(1)	1NO
	12V AC/DC	CW-CNP10Q3	(2)	LED unit
	24V AC/DC	CW-CNP10Q4	(3)	Dummy
1NC (01)	6V AC/DC	CW-CNP01Q2	(1)	Dummy
	12V AC/DC	CW-CNP01Q3	(2)	LED unit
	24V AC/DC	CW-CNP01Q4	(3)	1NC
1NO-1NC (11)	6V AC/DC	CW-CNP11Q2	(1)	1NO
	12V AC/DC	CW-CNP11Q3	(2)	LED unit
	24V AC/DC	CW-CNP11Q4	(3)	1NC
2NO (20)	6V AC/DC	CW-CNP20Q2	(1)	1NO
	12V AC/DC	CW-CNP20Q3	(2)	LED unit
	24V AC/DC	CW-CNP20Q4	(3)	1NO
2NC (02)	6V AC/DC	CW-CNP02Q2	(1)	1NC
	12V AC/DC	CW-CNP02Q3	(2)	LED unit
	24V AC/DC	CW-CNP02Q4	(3)	1NC

- Illuminated contact unit includes a contact block, LED unit, dummy block, and connecting unit.

## Contact Unit for Pilot Light Part No.

Quantity: 1







Rated Operating Voltage (Code)	Part No.	Mounting Position	Contact
6V (Q2)	CW-CNPQ2	(1)	Dummy
12V (Q3)	CW-CNPQ3	(2)	LED unit
24V (Q4)	CW-CNPQ4	(3)	Dummy

- Contact unit for pilot light includes one LED unit, two dummy blocks, and one connecting unit.



**Note:** Specify the same contact configuration as the reference assembled part no.

## Accessories

All dimensions in mm

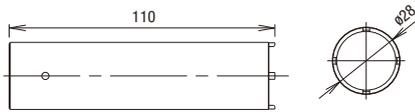Shape	Material	Part No.	Quantity	Remarks
	Metal (Brass)	MW9Z-T1	1	<ul style="list-style-type: none"> <li>• Used to tighten the locking ring when installing the CW series control unit in a panel cut-out.</li> <li>• Weight: Approx 150 g</li> </ul> 
	Polyamide (black)	LW9Z-BP1	1	<ul style="list-style-type: none"> <li>• Used to plug an unnecessary ø22.3 mm hole in the panel.</li> <li>• Degree of protection: IP65</li> <li>• Panel thickness: 0.8 to 6.0 mm</li> </ul> 
	Rubber (Transparent silicon rubber)	CW9Z-D11	1	<ul style="list-style-type: none"> <li>• Degree of protection: IP66/67 UL Type 4X</li> <li>• Panel thickness: 0.8 to 3.2 mm</li> <li>• Use with round flush illuminated pushbuttons/pushbuttons.</li> </ul> 
		CW9Z-D12	1	<ul style="list-style-type: none"> <li>• Degree of protection: IP66/67 UL Type 4X</li> <li>• Panel thickness: 0.8 to 3.2 mm</li> <li>• Use with round extended illuminated pushbuttons/pushbuttons.</li> </ul> 

Tools

Name / Shape	Part No.	Quantity	Remarks
	S3TL-CR04T	1	Applicable ferrule: Ferrules with and without insulated cover Crimping range: 0.5 to 4mm <sup>2</sup> / 30AWG to 12AWG Crimping shape: 
	S3TL-CR06D	1	Applicable ferrule: Ferrules with and without insulated cover Crimping range: 0.25 to 6mm <sup>2</sup> / 24AWG to 10AWG Crimping shape: 
	S3TL-D04-20-60	1	Blade size (dimensions in mm.) 
	S3TL-D04-25-75	1	Blade size (dimensions in mm.) 



Maintenance Parts (Used for replacement only. Do not use the maintenance parts to modify the CW series)

All dimensions in mm

Name / Shape	Material	Part No.	Quantity	Remarks		
	1NO contact Housing color: blue	HW-P10R	5	Contact No.: 1st stage: 3-4		
	1NC contact Housing color: reddish purple	HW-P01	5	Contact No.: 1st stage: 1-2		
 (Image: HW-PW2R0)	2NO contact Housing color: blue	HW-PW2R0	5	Contact No.: 1st stage: 13-14 2nd stage: 23-24		
	2NC contact Housing color: reddish purple	HW-PW02	5	Contact No.: 1st stage: 11-12 2nd stage: 21-22		
	1NO1NC contact Housing color: reddish purple / blue	HW-PW1R1	5	Contact No.: 1st stage: 13-14 2nd stage: 21-22		
	—	CW-CN	1	Connecting unit for Push-in terminal		
	Polyamide (black)	CW-DB	5	—		
	Rated Operating Voltage	6V AC/DC	CW-PAQ2	1	Current draw	AC: 16 mA DC: 12 mA
		12V AC/DC	CW-PAQ3			AC: 7 mA DC: 6 mA
		24V AC/DC	CW-PAQ4			AC: 6 mA DC: 6 mA

**Maintenance Parts** (Used for replacement only. Do not use the maintenance parts to modify the CW series)

All dimensions in mm

Name / Shape	Material	Part No.	Quantity	Remarks	
Button 	① Round flush	Polyarylate ø19.5 H3.5	CW9Z-B11 *	5	For maintained pushbuttons. Specify a button color code in place of * in the Part No. B (black), G (green), R (red), Y (yellow), S (blue), W (white)
	② Round extended	Polyarylate ø19.5 H6.2	CW9Z-B12 *	5	
Lens 	① Round flush	Polyarylate ø19.5 H3.5	CW9Z-L11*-K	5	For illuminated pushbuttons. Specify a button color code in place of * in the Part No. R (red), G (green), Y (yellow), A (amber), C (clear), S (blue) Note: If the illumination color is PW (pure white), use a C (clear) lens.
	② Round extended	Polyarylate ø19.5 H6.2	CW9Z-L12*-K	5	
Locking Ring 	Polyamide (black)	CW9Z-LN	5	—	
Gasket 	Nitrile rubber	CW9Z-WM	10	Waterproof gasket between CW control unit bezel and the mounting panel. 	
Spare Key 	Zinc (nickel-plated)	LA9Z-SK-0H	2	Specify a key No. in place of □. 0H: Standard key (reversible) 1H to 2H: Reversible key 3H to 6H: Non-reversible key • For dimensions, see page 28.	
		LA9Z-SK-□			

**⚠ Safety Precautions**

- Turn off the power to the CW series switches & pilot lights before starting installation, removal, wiring, maintenance, and inspection of the products. Failure to turn power off may cause electrical shocks or fire hazard.
- For wiring, use wires of a proper size to meet the voltage and current requirements, and the number of connectable wires (page 39).

- Failure to tighten the terminal screws may cause overheating and fire.
- Avoid using in places mentioned below to maintain performance of the product.
  - Exposed to direct sunlight
  - Subject to corrosive or flammable gases

**Instructions**

**Notes for Operation**

- When using the CW series control units in a safety-related circuit of a control system, observe safety rules and regulations of each country concerning particular applications of the actual machines and facilities. Perform risk assessment before operation to ensure safety.


**Operating Conditions**

- In corrosive gas or high-temperature, high-humidity atmosphere, contact failure due to corrosion or color change or breakage of the housing may occur.
- Main parts of the CW series control units are made of plastic. Do not scratch the surface with a sharp object or apply excessive shocks or load, otherwise the control units may be damaged.
- In particular, keep the button, lens, and bezel from such damage, otherwise appearance and function may be impaired.
- Do not apply detergents, cutting oils, or chemicals which may impair the function and appearance of the CW series control units.


**Installing the Contact Unit**

1. Remove the contact block from the operator.
2. Remove the locking ring from the operator.
3. With the TOP marking of the operator facing upwards, align the anti-rotation projection on the operator with the recess in the mounting hole, insert the operator into the mounting hole. **TOP** When installing the nameplate, insert between the operator and the panel.
4. Tighten the locking ring from the rear of the panel.

**Pushbuttons and Illuminated Pushbuttons**

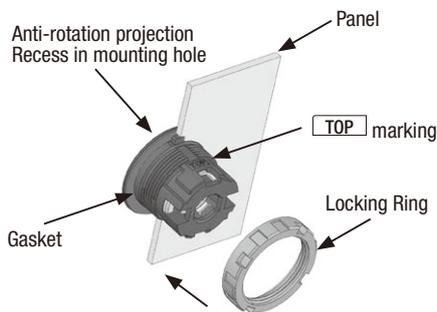


**Selector and Key Selector Switches**

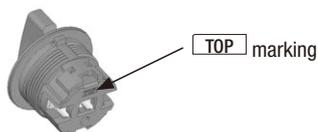

**Removing and Installing the Contact Unit**

1. To remove the contact block from the operator, push the yellow locking lever and turn it to the left.
2. To install, align the TOP marking on the operator with the TOP marking on the contact block mounting adaptor, and turn the locking lever to the right.

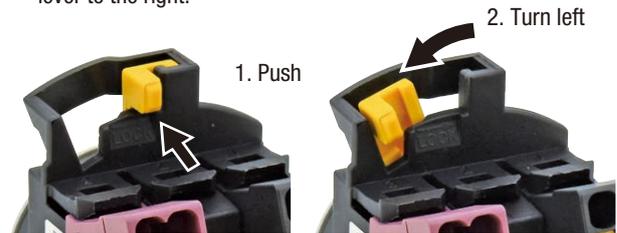

**Notes for Panel Mounting**

**Locking ring wrench recommended torque**  
Tighten the bezel to a tightening torque of 1.2 N·m

**Locking ring wrench**

Locking ring wrench (MW9Z-T1) can be used to tighten the bezel. Do not use pliers. Excessive tightening will damage the locking ring.



Locking ring wrench (MW9Z-T1)

**Mounting Hole**

1. Mounting hole dimensions are in compliance with IEC 60947-5-1.
2. If the anti-rotation projection is removed from the bezel, CW series control units can be mounted in ø22.3 mm mounting holes. To remove the anti-rotation projection, remove the gasket and use cutting pliers to break the projection. Also, make sure not to damage other parts of the operator.



Instructions

**Removing and Installing Contact Blocks, Dummy Blocks and LED Unit**

**Removing**

To remove the contact block, dummy block, and LED unit from the operator, insert a flat screwdriver under the latch and push down the screwdriver as shown below.




**Installing**

When installing the contact block or dummy block, make sure that it snaps on to the operator.

Note 1) Make sure to attach a correctly assembled connection unit to the operator.

Note 2) When attaching the contact block to the connection unit, make sure that the connection is detached from the operator. If a contact block is installed with the operator attached to the connection unit, malfunction of the switch may occur.

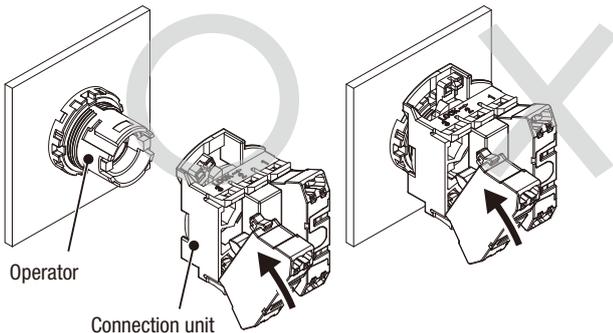


**Test Point**

Note) Do not insert wires to the test points.

**Single contact block**

Note) When conducting a continuity test, make sure that the probes (ø2.0 maximum) of the tester are inserted vertically to the panel.

Single contact block

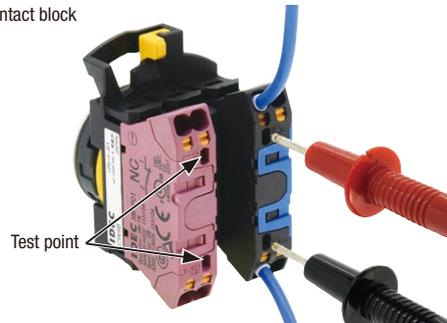


**Double contact block**

When conducting a continuity test on the first deck, make sure that probes (ø2.0 maximum) of the tester are inserted in an angle of the contact block, in two places as shown below.

When conducting a continuity test on the second deck, make sure that probes (ø2.0 maximum) of the tester are inserted vertically to the panel.

(1) First deck test point

(2) Second deck test point

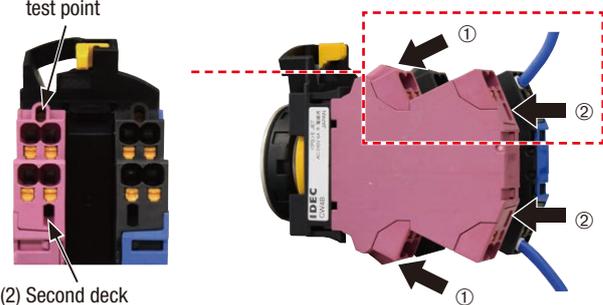

**Instructions**

**Removing and Installing Lens and Buttons**

**Pushbuttons (momentary)**


Momentary pushbutton caps cannot be removed. Do not tamper with the pushbutton caps using a screwdriver or pliers, otherwise the pushbutton caps may be damaged.

**Pushbuttons (maintained) / Illuminated Pushbuttons / Pilot Lights**


To remove the button or lens from a pushbutton, illuminated pushbutton or pilot light, insert a flat screwdriver under the flange of the lens at 90° from the TOP marking and twist the screwdriver.

Note) Insert the flat screwdriver by about an angle of 30°. Do not insert the screwdriver too deeply and do not apply excessive force to the lens, otherwise the bezel surface may be damaged.

Screwdriver Insertion Direction

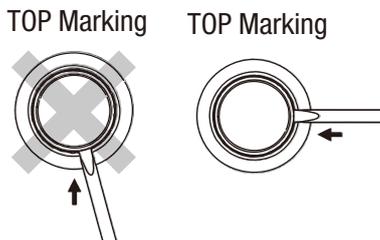


Screwdriver Insertion Angle

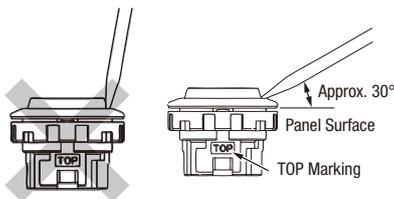

**Installing the Lens**

Turn the groove in the lens to the TOP marking on the operator housing. With the groove aligned with the ridge, press the lens in.

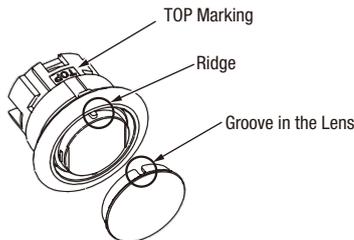

**Marking**

Marking plates are not available for CW series illuminated pushbuttons and pilot lights. Marking film can be inserted to indicate legends.

**Applicable Marking Film Size**


All dimensions in mm

	Illuminated Pushbutton (Round Flush)	Illuminated Pushbutton (Round Extended)
Applicable marking film size		
Thickness: 0.2 mm maximum Note: Film is not supplied and must be prepared by the user. Film material:		

**Nameplate / Marking Plate**


**Installing the marking plate on a nameplate**

Insert a marking plate in the direction of the arrow ①, and press in as shown ②.




**Removing a Marking Plate**

Insert a flat screwdriver into the upper middle part of the marking plate and remove. When anti-rotation is not required, remove the projection from the nameplate using pliers.

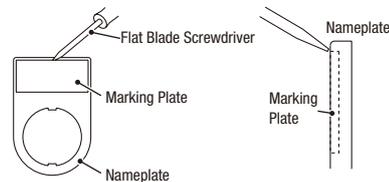

Note: When using a nameplate, the mounting panel thickness is 2.6 mm maximum.

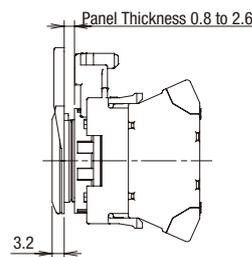

## Instructions


### Installing the Rubber Boot

When using in places where the switches are subjected to water splash or an excessive amount of dust, make sure to use the optional rubber boot.

1. Remove the gasket from the operator, and mount the rubber boot to cover the bezel as shown in the below diagram (Do not use a washer).
2. Fit the rubber boot to the bezel of the operator as shown in the diagram of the completed operator below.

#### Notes

- Attach the rubber boot by making sure that the front round part (A) of the rubber boot is concentric with the lens and button. Otherwise the appearance may look different.
- Make sure that the rubber boot is properly fitted, otherwise, the waterproof and dustproof characteristics are not ensured.

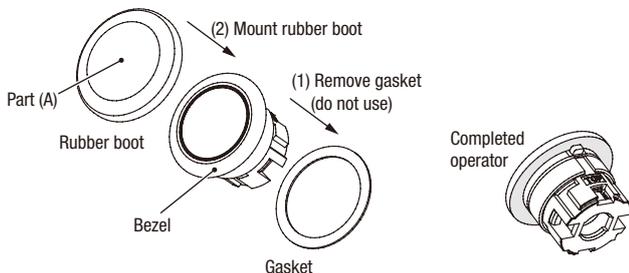

Note: Install the rubber boot before mounting the unit to the panel.

### Key Selector Switches

To prevent malfunctions and damage, take the following precautions.

- Insert the key to the bottom before turning.
- Do not remove the key while turning.
- Besides the standard key (0H), six other keys are available. Use a key with a key that matches the number on the key cylinder. However, for standard keys, the key number is engraved on the key but not on the key cylinder.
- Keys are available in two shapes. Key numbers 0H (standard), 1H, and 2H are reversible keys. Key numbers 3H, 4H, 5H, and 6H are non-reversible keys. Make sure of correct insertion direction.

### Maintained Switches

Do not replace the button/lens while the operator is latched. Otherwise the internal structure will be damaged.

### Selector Switches

Turn the selector operator or key securely to each position.

### Applicable Wire

When wiring, use the applicable wires shown below.


#### Applicable Wire and Specifications

Applicable Wire (*1)	0.25 to 1.5mm <sup>2</sup> (AWG16 to 24)
Wire Strip Length (*2)	8 ± 1mm (*3)

\*1) For applicable wires confirmed by IDEC, see website.

\*2) For details on ferrules, see "Wire Size and Recommended Ferrules" table below.

\*3) Strip the sheath of the wire 8±1mm from the end.



Note: Make sure that the stranded wires do not loosen when using wiring without ferrules.

### Wire Size and Recommended Ferrules

#### Ferrules with insulated covers

Applicable Wire (Stranded Wire)		Wire Strip Length	IDEC Part No.
AWG	mm <sup>2</sup>		
24	0.25	10 to 11mm	S3TL-H025-12WJ
22	0.34	10 to 11mm	S3TL-H034-12WT
20	0.50	10 to 11mm	S3TL-H05-14WA
18	0.75	10 to 11mm	S3TL-H075-14WW
18	1.00	10 to 11mm	S3TL-H10-14WY
16	1.50	10 to 11mm	S3TL-H15-14WR

#### Recommended Crimping Tool (Optional)

Item	IDEC Part No.
Crimping tool	S3TL-CR04T
	S3TL-CR06D


Note 1) Note the crimping dimensions when using tools other than the recommended crimping tool. For details, see page 32.

Note 2) The above crimping tool cannot be purchased from IDEC.

#### Recommended Screwdriver (Optional)

Item	IDEC Part No.
Flat blade screwdriver	S3TL-D04-20-60
	S3TL-D04-25-75

Note ) Use a flat blade screwdriver with a blade size of 0.4×2.5 mm.



- For details on crimping tools, see page 39.


Instructions

Wiring Procedure

Connecting the wire


1) Stranded wires with ferrules or solid wire

- ① Insert the wire to the back of the wire port.
- ② After wiring, tug lightly to make sure that the wire is properly connected.

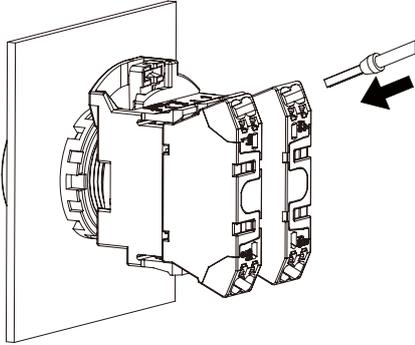


2) Stranded wire

- ① While pressing the pusher using a flat blade screwdriver (recommended optional screwdriver: S3TL-D04-20-60 or S3TL-D04-25-75), insert the wire fully in the wiring port. Wire is connected when the pusher is released.
- ② After wiring, tug lightly to make sure that the wire is properly connected.

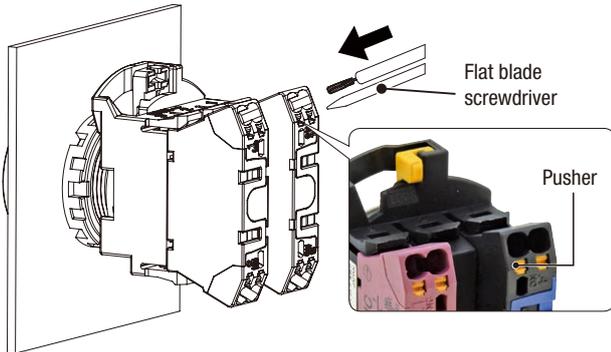

Crimping of Ferrules and Wiring


- Choose an appropriate ferrule for the wire.
- Cut the wire carefully to get a flat end.
- Make sure that ferrule sleeve is completely filled by the conductor. Depending on the cross section, the conductor should protrude approx. 0 to 1 mm from the ferrule sleeve.

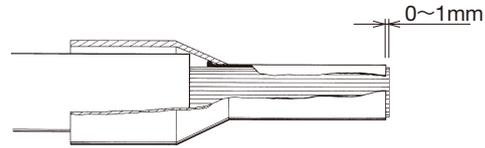

- When crimping, refer to the instructions of the crimping tool.

Faults which can occur during crimping:

- Cracks along the sides and die impressions
- Splitting of the ferrules
- Asymmetrical crimping shape
- Extreme burrs formed along the sides
- Ferrule not filled by conductor
- Single conductors pushed back by protruding from the insulated cover
- Single conductors squeezed off
- Insulated cover damaged by the crimping jaw
- Conductor insulation not pushed into the insulated cover
- Ferrule bent longitudinally after crimping

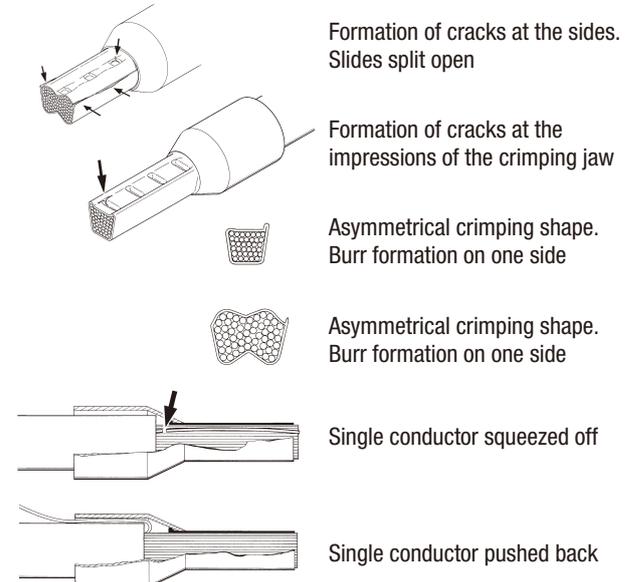


## Instructions

### Crimping dimensions: W2.4×H1.9 mm

Maximum connectable crimping size is W2.4×H1.9. Make sure that the ferrule size will be smaller than this dimension.

(See page 32 for recommended crimping tools)

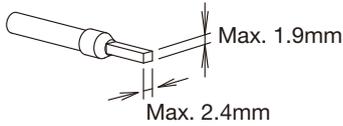


Note 1) If a tool other than the recommended crimping tool is used, the ferrule may not be crimped to the appropriate size and the clamp or spring inside the contact block may be deformed and may not operate normally.

Note 2) Pin crimp terminals cannot be used.

### Removing the Wire

When removing the wire, push the pusher using a flat blade screwdriver (recommended optional screwdriver: S3TL-D04-20-60, see page 32) and pull wire out in the direction of the arrow.

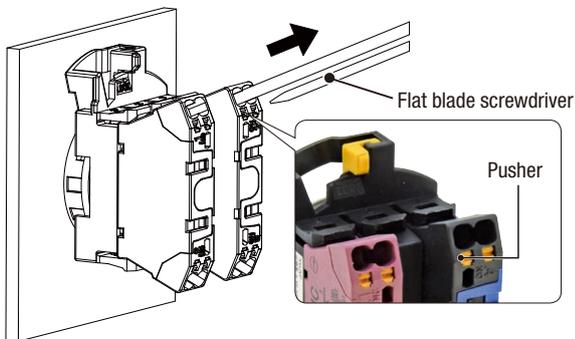

#### <Notes>

- Operate the pusher with a force of 20N. Do not press excessively. Otherwise, the switch may be damaged.
- Do not pull the wire out without depressing the pusher. When pulling the wire, be sure to pull in a straight direction. Otherwise, the socket may be damaged.

### Number of Connectable Wires

Unit	Connectable wires		No. of connectable wires
HW-P Contact block	Solid wire	0.25 to 1.5mm <sup>2</sup> (AWG16 to 24)	2
	Stranded wire	0.25 to 1.5mm <sup>2</sup> (AWG16 to 24)	
LED unit	Ferrule	Without insulated cover 0.25mm <sup>2</sup> :conductor length 5 to 10mm 0.5 to 1.0mm <sup>2</sup> :conductor length 6 to 10mm 1.5mm <sup>2</sup> :conductor length 8 to 10mm With insulated cover 0.25 to 1.0mm <sup>2</sup> :conductor length 6 to 10mm 1.5mm <sup>2</sup> :conductor length 8 to 10mm Note) Pin terminals cannot be used	

Note) Only one wire can be inserted into one wire port.

## Ordering Terms and Conditions

Thank you for using IDEC Products.

By purchasing products listed in our catalogs, datasheets, and the like (hereinafter referred to as "Catalogs") you agree to be bound by these terms and conditions. Please read and agree to the terms and conditions before placing your order.

### 1. Notes on contents of Catalogs

- (1) Rated values, performance values, and specification values of IDEC products listed in this Catalog are values acquired under respective conditions in independent testing, and do not guarantee values gained in combined conditions.  
Also, durability varies depending on the usage environment and usage conditions.
- (2) Reference data and reference values listed in Catalogs are for reference purposes only, and do not guarantee that the product will always operate appropriately in that range.
- (3) The specifications / appearance and accessories of IDEC products listed in Catalogs are subject to change or termination of sales without notice, for improvement or other reasons.
- (4) The content of Catalogs is subject to change without notice.

### 2. Note on applications

- (1) If using IDEC products in combination with other products, confirm the applicable laws / regulations and standards.  
Also, confirm that IDEC products are compatible with your systems, machines, devices, and the like by using under the actual conditions. IDEC shall bear no liability whatsoever regarding the compatibility with IDEC products.
- (2) The usage examples and application examples listed in Catalogs are for reference purposes only. Therefore, when introducing a product, confirm the performance and safety of the instruments, devices, and the like before use. Furthermore, regarding these examples, IDEC does not grant license to use IDEC products to you, and IDEC offers no warranties regarding the ownership of intellectual property rights or non-infringement upon the intellectual property rights of third parties.
- (3) When using IDEC products, be cautious when implementing the following.
  - i. Use of IDEC products with sufficient allowance for rating and performance
  - ii. Safety design, including redundant design and malfunction prevention design that prevents other danger and damage even in the event that an IDEC product fails
  - iii. Wiring and installation that ensures the IDEC product used in your system, machine, device, or the like can perform and function according to its specifications
- (4) Continuing to use an IDEC product even after the performance has deteriorated can result in abnormal heat, smoke, fires, and the like due to insulation deterioration or the like. Perform periodic maintenance for IDEC products and the systems, machines, devices, and the like in which they are used.
- (5) IDEC products are developed and manufactured as general-purpose products for general industrial products. They are not intended for use in the following applications, and in the event that you use an IDEC product for these applications, unless otherwise agreed upon between you and IDEC, IDEC shall provide no guarantees whatsoever regarding IDEC products.
  - i. Use in applications that require a high degree of safety, including nuclear power control equipment, transportation equipment (railroads / airplanes / ships / vehicles / vehicle instruments, etc.), equipment for use in outer space, elevating equipment, medical instruments, safety devices, or any other equipment, instruments, or the like that could endanger life or human health
  - ii. Use in applications that require a high degree of reliability, such as provision systems for gas / waterworks / electricity, etc., systems that operate continuously for 24 hours, and settlement systems
  - iii. Use in applications where the product may be handled or used deviating from the specifications or conditions / environment listed in the Catalogs, such as equipment used outdoors or applications in environments subject to chemical pollution or electromagnetic interference  
If you would like to use IDEC products in the above applications, be sure to consult with an IDEC sales representative.

### 3. Inspections

We ask that you implement inspections for IDEC products you purchase without delay, as well as thoroughly keep in mind management/maintenance regarding handling of the product before and during the inspection.

### 4. Warranty

- (1) Warranty period  
The warranty period for IDEC products shall be one (1) year after purchase or delivery to the specified location. However, this shall not apply in cases where there is a different specification in the Catalogs or there is another agreement in place between you and IDEC.
- (2) Warranty scope  
Should a failure occur in an IDEC product during the above warranty period for reasons attributable to IDEC, then IDEC shall replace or repair that product, free of charge, at the purchase location / delivery location of the product, or an IDEC service base. However, failures caused by the following reasons shall be deemed outside the scope of this warranty.
  - i. The product was handled or used deviating from the conditions / environment listed in the Catalogs
  - ii. The failure was caused by reasons other than an IDEC product
  - iii. Modification or repair was performed by a party other than IDEC
  - iv. The failure was caused by a software program of a party other than IDEC
  - v. The product was used outside of its original purpose
  - vi. Replacement of maintenance parts, installation of accessories, or the like was not performed properly in accordance with the user's manual and Catalogs
  - vii. The failure could not have been predicted with the scientific and technical standards at the time when the product was shipped from IDEC.
  - viii. The failure was due to other causes not attributable to IDEC (including cases of force majeure such as natural disasters and other disasters)

Furthermore, the warranty described here refers to a warranty on the IDEC product as a unit, and damages induced by the failure of an IDEC product are excluded from this warranty.

### 5. Limitation of liability

The warranty listed in this Agreement is the full and complete warranty for IDEC products, and IDEC shall bear no liability whatsoever regarding special damages, indirect damages, incidental damages, or passive damages that occurred due to an IDEC product.

### 6. Service scope

The prices of IDEC products do not include the cost of services, such as dispatching technicians. Therefore, separate fees are required in the following cases.

- (1) Instructions for installation / adjustment and accompaniment at test operation (including creating application software and testing operation, etc.)
- (2) Maintenance inspections, adjustments, and repairs
- (3) Technical instructions and technical training
- (4) Product tests or inspections specified by you

The above content assumes transactions and usage within your region. Please consult with an IDEC sales representative regarding transactions and usage outside of your region. Also, IDEC provides no guarantees whatsoever regarding IDEC products sold outside your region.

# IDEC CORPORATION

**Head Office** 6-64, Nishi-Miyahara-2-Chome, Yodogawa-ku, Osaka 532-0004, Japan

 [www.idec.com](http://www.idec.com)

**USA** IDEC Corporation  
**EMEA** APEM SAS

**Singapore** IDEC Izumi Asia Pte. Ltd.  
**Thailand** IDEC Asia (Thailand) Co., Ltd.  
**India** IDEC Controls India Private Ltd.

**China** IDEC (Shanghai) Corporation  
IDEC Hong Kong Co. Ltd.  
**Taiwan** IDEC Taiwan Corporation

**Japan** IDEC Corporation