

# **LED Light Engine**

3.0" Round Module With 24 Nichia LEDs




Rev 8-10-2017









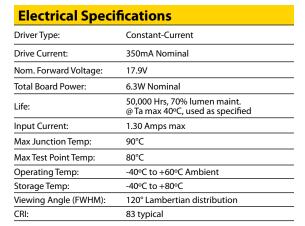




Model	Total Board Power (W)	Total Current (mA)	Color Temp (K)	Lumens (± 15%)	Board LPW
98013	6.3	350	2700	769	123
98014	6.3	350	3000	820	131
98015	6.3	350	3500	860	137
98016	6.3	350	4000	883	141
98031	6.3	350	5000	910	144



- Constant-Current DC Array, 6 LED Series x 4 Parallel Strings
- Designed for easy use in standard luminaires
- Tight LED pitch eliminates pixelization, no complex lens or optics required
- Color: 1/4 ANSI Binning, 3 Step MacAdam Ellipse
- Applications: Commercial or Residential Downlights
- Customizable: Engines can be modified to your application. Contact us.
- Engineered by Norlux
- 5 yr. Warranty

# **Dimensions**

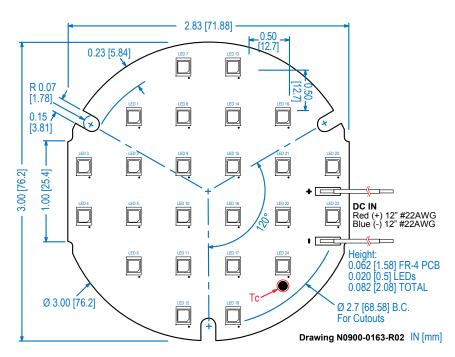

#### **Connectivity Options**

Suffix	Connection		
(blank)	12 IN, #22 AWG Stranded Leads		
-01	No Leads		
-02	Push-in Connectors		
Far Dalia In Carrantona			

For Poke-In Connectors, use #24-18 AWG stranded or solid wire

 $\star$  MADE IN USA  $\star$ 



# **LED Light Engine**



3.0" Round Module With 24 Nichia LEDs

# **CIE Chromaticity Coordinates:**

# 2700K

3 Step Macadams Ellipse

Υ
0.4183
0.4212
0.3999
0.4025

### 3000K

3 Step Macadams Ellipse

Х	Υ
0.4325	0.4101
0.4452	0.4146
0.4244	0.3923
0.4362	0.3965

### 3500K

3 Step Macadams Ellipse

Х	Υ
0.4045	0.3975
0.4189	0.4044
0.3989	0.3819
0.412	0.3875

#### 4000K

3 Step Macadams Ellipse


Х	Υ
0.3783	0.3836
0.3909	0.3906
0.3746	0.3687
0.3864	0.3757

### 5000K

3 Step Macadams Ellipse

X	Υ
0.3408	0.3461
0.3485	0.3520
0.3416	0.3585
0.3499	0.3644

#### Relative Luminous Flux / Tc Temperature

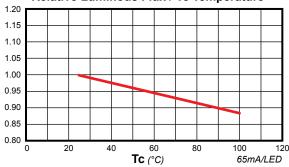

## **Compatible TRP Drivers:**

The drivers listed here are all compatible with this module. Choose the best driver for your application.

• LED12W-36-C0350-D

## **Step Dimming:**


This Light Engine can be step-dimmed, with a recommended TRP dimmable driver and SD series step-dimming module. See the SD2 or SD3 data sheet for wiring information.


# Series/Parallel Configurations

Parallel: The positive and negative of one board is connected to the respective positive and negative of the next. Current adds, so the supply must be 2x the current for 2 boards.

Series:

The negative of one board is connected to the positive of the next. Voltage adds, so the supply must be 2x the voltage for 2 boards.





# Maximum Run Lengths

The max number of boards wired in a chain (series) is limited by the max current rating of the first board wired to the driver. The sum of the board currents, in the chain, funnels through the first board. Multiple chains can connect directly to the power supply in parallel. See table for max chain length.

Product	Series/Parallel	Max Allowable Boards		
Product	<u>Series/Faranei</u>	High Current (Nom)	Low Current	
3" Round	Series	10	N/A	

# **Mounting Notes**

The LED assembly is supplied with mounting holes, per the dimensional drawing. It is important to mount the board in such a way as to maintain the To point below the max. The steady state thermals in application will dictate if the board needs to be mounted directly to metallic housing and/or include a thermal pad. For example fully enclosed recessed fixture will require better thermal mounting than an open air pendant.

# Thermal Application Notes

This board requires additional heat sinking to run above 45°C ambient at nominal specifications. Heat sink is also required when operated above specified drive currents.

## **Maximum Current**

Max Current: 720mA

Voltage at max current: 20V, Power at max current: 14.4W

The total maximum current reflects the LED maximum forward current only. without considering thermal needs. Driving the LEDs this hard will likely violate their thermal limits, depending on the application. Tc point must remain at or below the max temperature, or the warranty will be voided. Temperature is directly correlated to LED current.

# **Static Sensitive Device**

Handle only at static-safe work stations.

### **Packaging**

50 per box standard.