

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	EVBC846-EVBC848
▶ Overseas	Part Number	BC846-BC848
▶ Equivalent	Part Number	BC846-BC848


"S1" means SOT-23

EV is the abbreviation of name EVVO

■ NPN Transistors

■ Features

- Ideally suited for automatic insertion
- For switching and AF amplifier applications

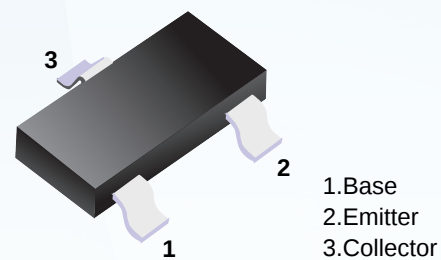

■ Simplified outline(SOT-23)

■ Absolute Maximum Ratings $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	BC846	BC847	BC848	Unit
Collector - Base Voltage	V _{CB0}	80	50	30	V
Collector - Emitter Voltage	V _{CEO}	65	45	30	
Emitter - Base Voltage	V _{EB0}	6	6	6	
Collector Current - Continuous	I _C	100			mA
Collector Power Dissipation	P _C	200			mW
Junction Temperature	T _J	150			°C
Storage Temperature Range	T _{stg}	-55 to 150			









■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	BC846 BC847 BC848	V_{CBO} $I_C = 100 \mu A, I_E = 0$	80			V
			50			
			30			
Collector- emitter breakdown voltage	BC846 BC847 BC848	V_{CEO} $I_C = 1 mA, I_B = 0$	65			
			45			
			30			
Emitter - base breakdown voltage	V_{EBO}	$I_E = 100 \mu A, I_C = 0$	6			
Collector-base cut-off current	BC846 BC847 BC848	$V_{CB} = 70 V, I_E = 0$			100	nA
		$V_{CB} = 50 V, I_E = 0$				
		$V_{CB} = 30 V, I_E = 0$				
Collector- emitter cut-off current	BC846 BC847 BC848	$V_{CE} = 60 V, I_E = 0$			1	μA
		$V_{CE} = 45 V, I_E = 0$				
		$V_{CE} = 30 V, I_E = 0$				
Emitter cut-off current	I_{EBO}	$V_{EB} = 5 V, I_C = 0$			100	nA
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 100 mA, I_B = 5 mA$			0.4	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C = 100 mA, I_B = 5 mA$			1.1	
DC current gain	BC846A,847A,848A BC846B,847B,848B BC846C,847C,848C	$V_{CE} = 5 V, I_C = 2 mA$	110		220	
			200		450	
			420		800	
Collector output capacitance	C_{ob}	$V_{CB} = 10 V, f = 1 MHz$			4.5	pF
Transition frequency	f_T	$V_{CE} = 5 V, I_C = 10 mA, f = 100 MHz$	100			MHz


■ Classification of h_{FE}

Type	BC846A	BC846B	BC846C	BC847A	BC847B	BC847C	BC848A	BC848B	BC848C
Range	110-220	220-450	420-800	110-220	220-450	420-800	110-220	220-450	420-800
Marking	1A	1B	1C	1E	1F	1G	1J	1K	1L

■ Typical Characteristics

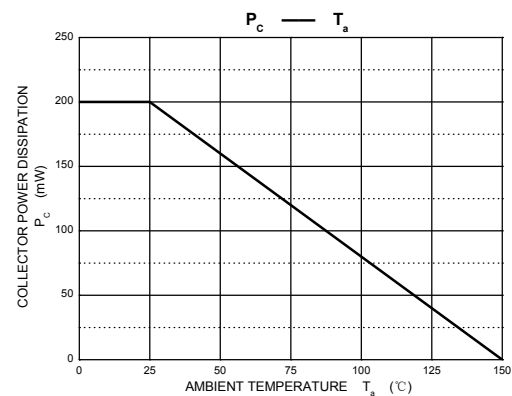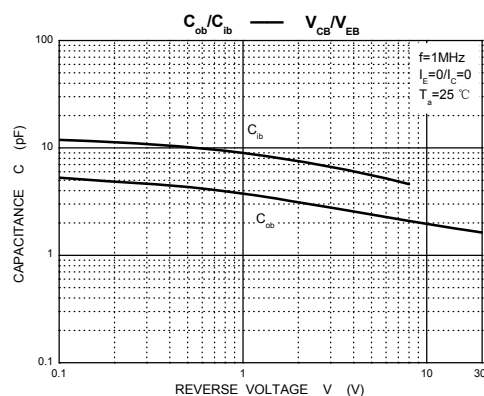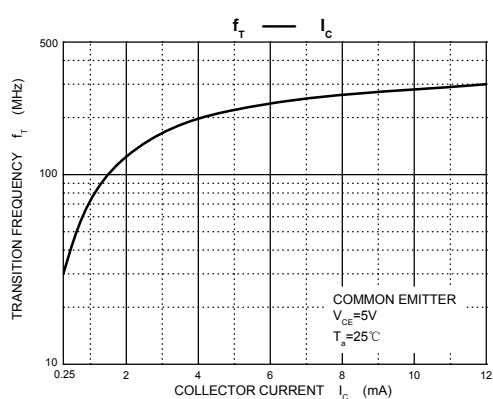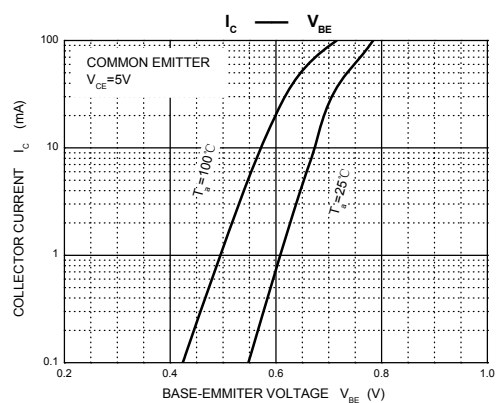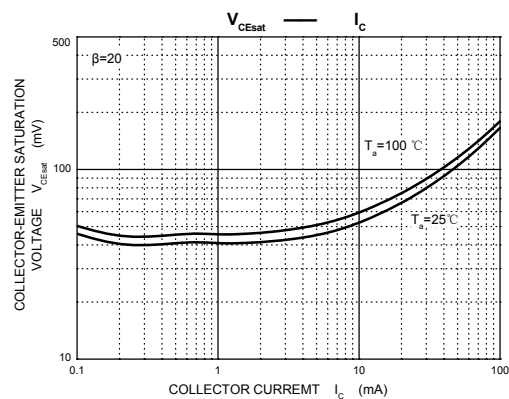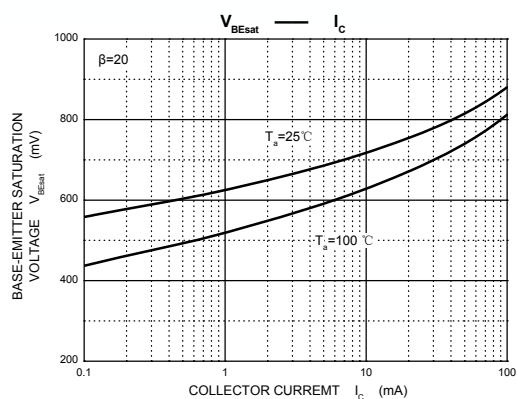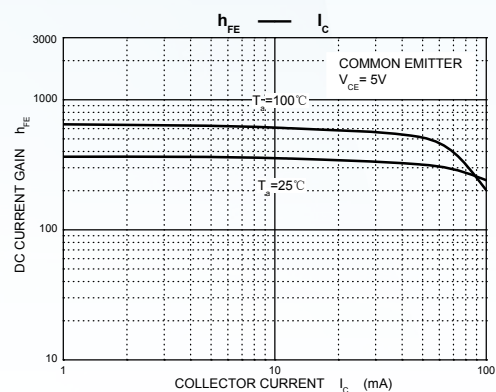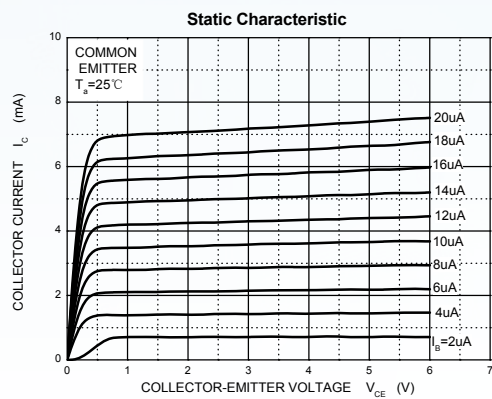

■ SOT-23

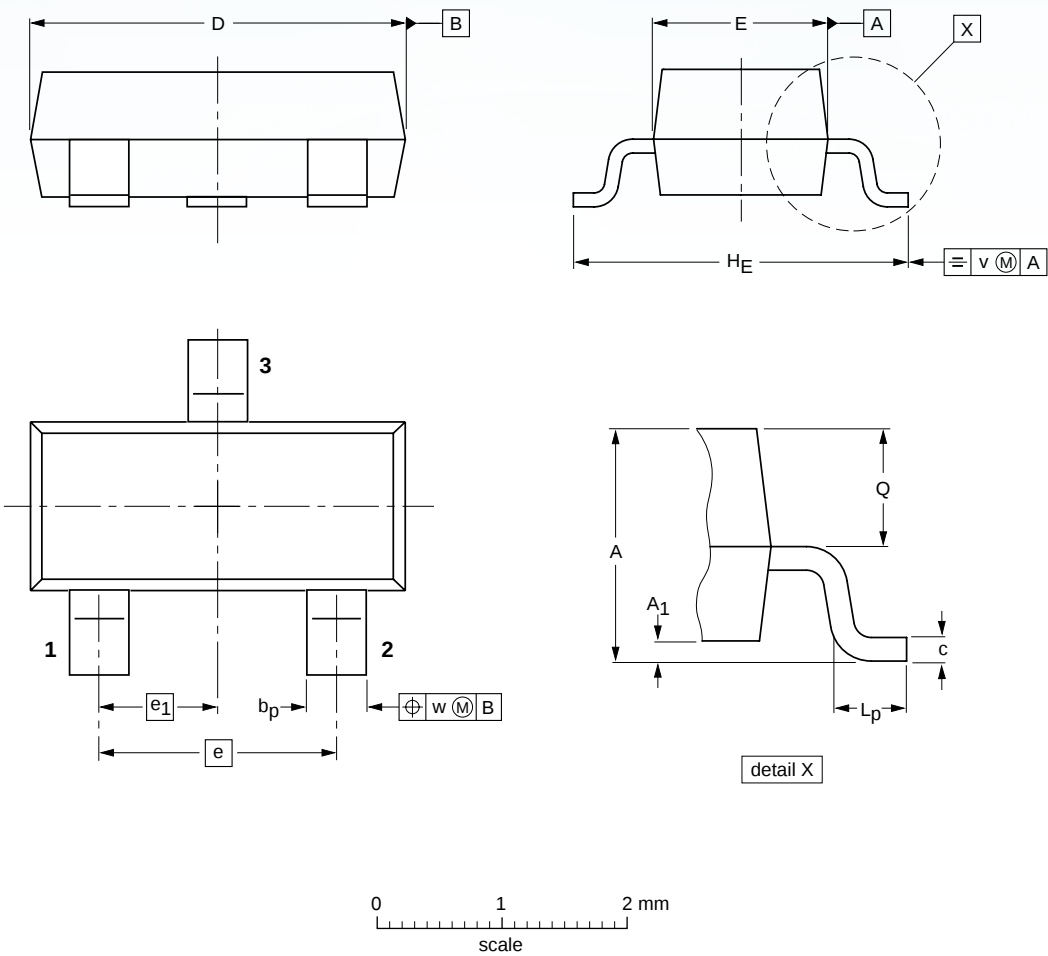

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max.	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.