

# EVVOSEMI<sup>®</sup>

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

## Product Specification

▶ Domestic	Part Number	DW01
▶ Overseas	Part Number	DW01
▶ Equivalent	Part Number	DW01

EV is the abbreviation of name EVVO

## General Description

The DW01 battery protection IC is designed to protect lithium-ion/polymer battery from damage or degrading the lifetime due to overcharge, overdischarge, and/or overcurrent for one-cell lithium-ion/polymer battery powered systems, such as cellular phones.

The ultra-small package and less required external components make it ideal to integrate the DW01-EV into the limited space of battery pack. The accurate  $\pm 50\text{mV}$  overcharging detection voltage ensures safe and full utilization charging. The very low standby current drains little current from the cell while in storage.

## Features

**Reduction in Board Size due to Miniature Package SOT-23-6.**

**Ultra-Low Quiescent Current at  $3\mu\text{A}$  ( $V_{CC}=3.6\text{V}$ ).**

**Overdischarge Current at  $4\mu\text{A}$  ( $V_{CC}=1.8\text{V}$ ).**

**Precision Overcharge Protection Voltage  $4.3\text{V} \pm 50\text{mV}$**

**Two Detection Levels for Overcurrent Protection.**

**Delay times are generated by internal circuits. No external capacitors required.**

## Ordering Information

PACKAGE TYPE  
SOT-23-6

TEMPERATURE RANGE  
 $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

OVERCHARGE PROTECTION  
 $4.3\text{V} \pm 50\text{mV}$

## Applications



- Protection IC for One-Cell Lithium-Ion / Lithium-Polymer Battery Pack

Product Name List


Product	Package	Overcharge detection voltage [V <sub>OCP</sub> ] (V)	Overcharge release voltage [V <sub>OCR</sub> ] (V)	Overdischarge detection voltage [V <sub>ODP</sub> ] (V)	Overdischarge release voltage [V <sub>ODR</sub> ] (V)	Overcurrent detection voltage [V <sub>OI1</sub> ] (mV)	0V battery charge function	Stand by function release
DW01-EV	SOT-23-6	4.300±0.050	4.100±0.050	2.40±0.100	3.0±0.100	150±30	available	Auto Recovery

Pin Configuration


Pin No.	Symbol	Description
1	OD	MOSFET gate connection pin for discharge control
2	CS	Input pin for current sense, charger detect
3	OC	MOSFET gate connection pin for charge control
4	TD	Test pin for reduce delay time
5	VCC	Power supply, through a resistor (R1)
6	GND	Ground pin



Functional Block Diagram

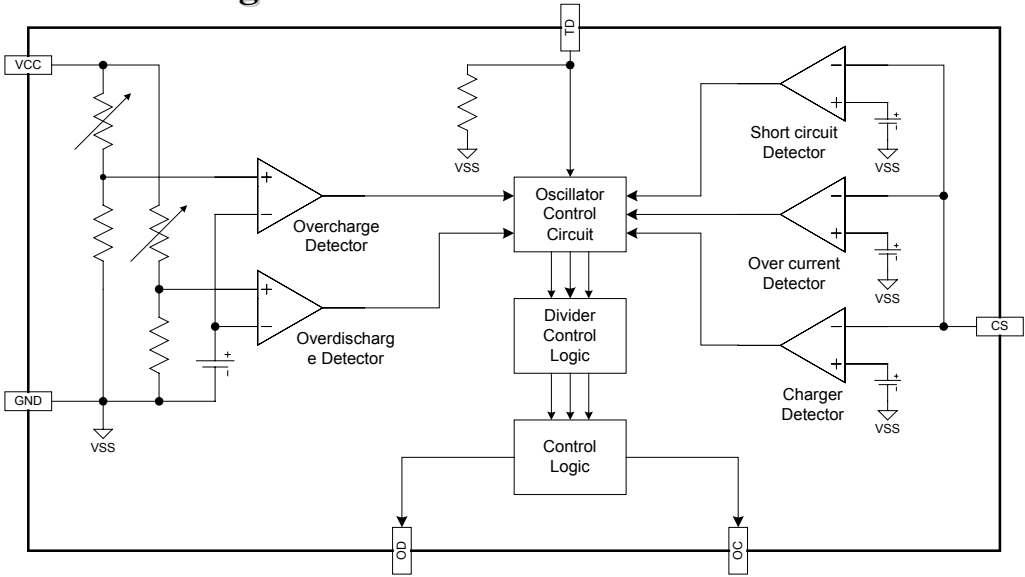

## Typical Application Circuit

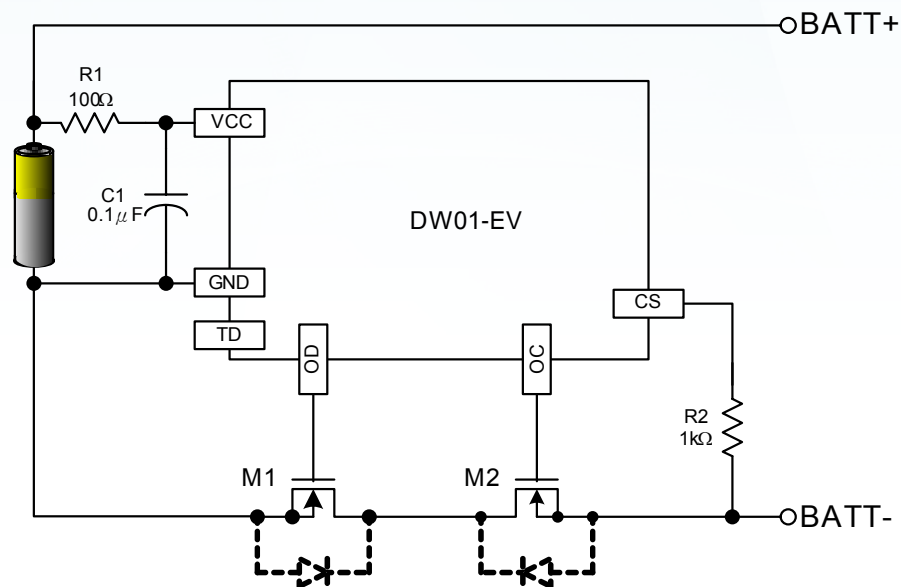

## Absolute Maximum Ratings

(VSS=0V, Ta=25 °C unless otherwise specified)

Item	Symbol	Rating	Unit
Input voltage between VDD and VSS	VDD	0.3 to 10	V
OC output pin voltage	VOC	VDD-24 to VDD+0.3	V
OD output pin voltage	VOD	VSS-0.3 to VDD+0.3	V
CS input pin voltage	Vcs	VDD-24 to VDD+0.3	V
Operating Temperature Range	TOP	-40 to +85	°C
Storage Temperature Range	TST	-40 to +125	°C


## Electrical Characteristics

(Ta=25 °C unless otherwise specified)


PARAMETER	TEST CONDITIONS	SYMBOL	Min	Typ	Max	UNIT
Supply Current	VCC=3.6V	ICC		3.0	6.0	μA
Power-Down Current	VCC=1.8V	IPD			4	μA
0V Battery Charge Starting Charger Voltage		V0CHA	1.2			V
Overcharge Protection Voltage		V0CP	4.25	4.30	4.35	V
Overcharge Release Voltage		VOCR	4.05	4.10	4.15	V
Overdischarge Protection Voltage		VODP	2.30	2.40	2.50	V
Overdischarge Release Voltage		VODR	2.90	3.00	3.10	V
Overcurrent Protection Voltage		VOIP (VOI1)	120	150	180	mV
Short Current Protection Voltage	VCC=3.0V	VSIP (VOI2)	1.0	1.2	1.4	V
Overcharge Delay Time		TOC		80	200	ms
Overdischarge Delay Time	VCC=3.2V to 2.0V	TOD		40	200	ms
Overcurrent Delay Time (1)	VCC=3.0V	TOI1		10	20	ms
Overcurrent Delay Time (2)	VCC=3.5V	TOI2		5	50	μs
Charger Detection Threshold Voltage		VCH	-1.2	-0.7	-0.2	V
OD Pin Output "H" Voltage		V <sub>DH</sub>	VCC-0.1	VCC-0.02		V
OD Pin Output "L" Voltage		V <sub>DL</sub>		0.1	0.5	V
OC Pin Output "H" Voltage		V <sub>CH</sub>	VCC-0.1	VCC-0.02		V
OC Pin Output "L" Voltage		V <sub>CL</sub>		0.1	0.5	V

## Timing Diagram


### 1. Overcharge Condition → Load Discharging → Normal Condition

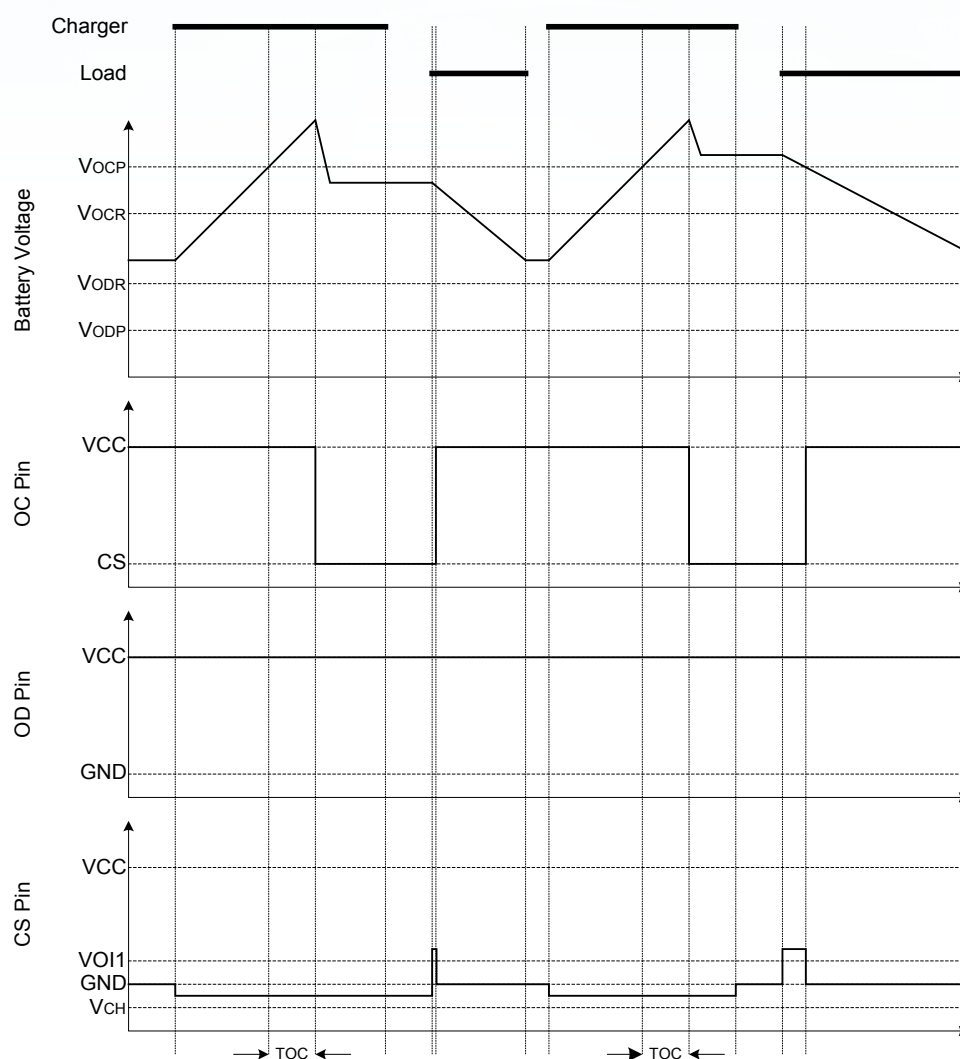

## 2. Overdischarge Condition → Charging by a Charger → Normal Condition

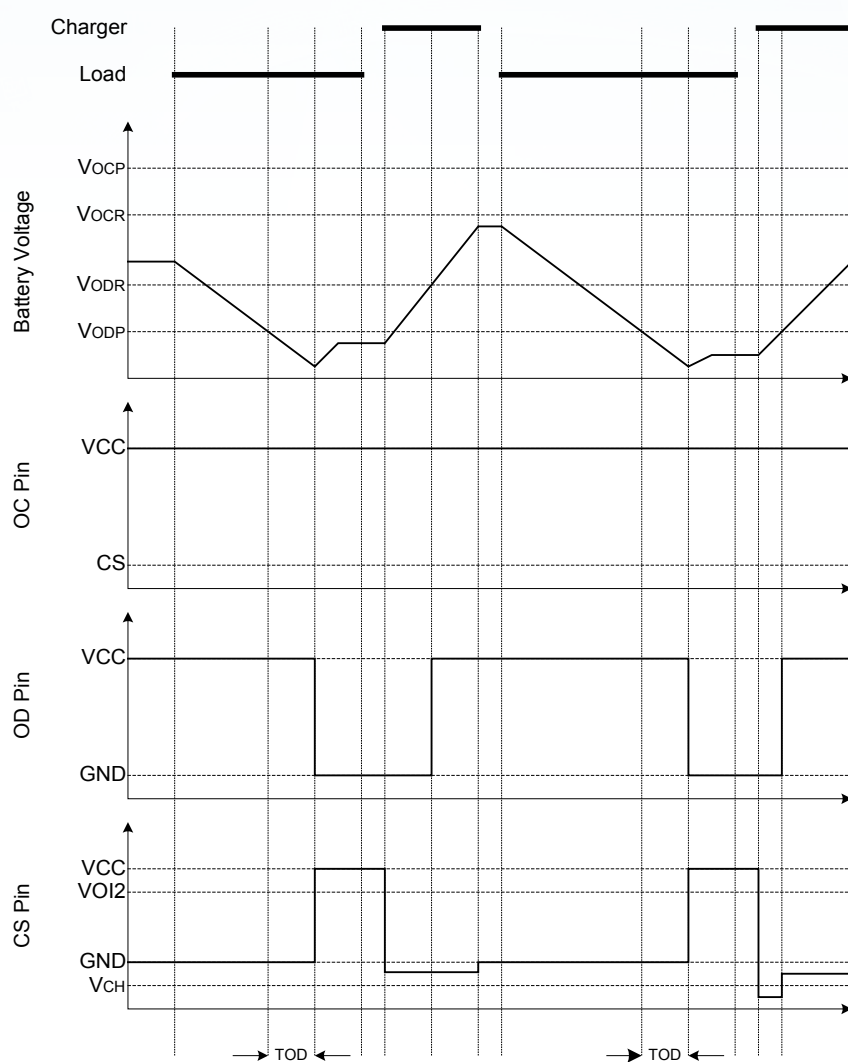

3. Over Current Condition → Normal Condition

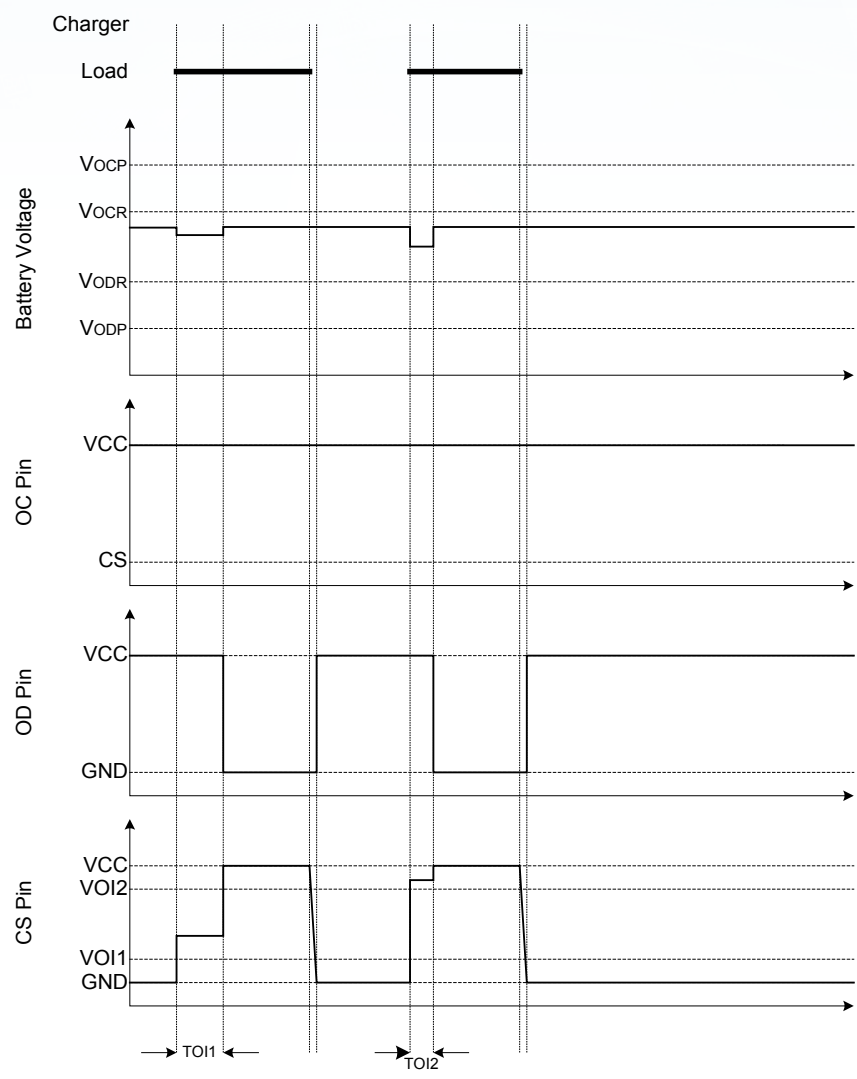



## Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.