



LCDK282CTL1xxH01

Kit to Interface with LCD282 over HDMI and USB

111 Corning Road, Suite 116 • Cary, NC 27518

Approvals	
Model Number	LCDK282CTL1xxH01
Datasheet Revision	1.2
Drawing Revision	C

Customer Approval	
Approved by: _____	Date: _____

Table of Contents

Revision History	4
Document Revision	4
Hardware Revision	5
Ordering Information	6
Product Description.....	7
Compatibility.....	7
General Specification	8
Pictorial.....	9
Carrier Board – 3D Rendering	9
Carrier Board – Mechanical Drawing.....	10
SODIMM – 3D Rendering PCB-L0074R1.2	11
SODIMM – 3D Rendering PCB-L0074R1.3	11
Connectors.....	12
Pin Out – S300, USB-C.....	13
Pin Out – S302, HDMI.....	13
Pin Out – S101, Power Jack	13
Pin Out – S100, 2 pin Power	14
Pin Out – S202, PWM.....	14
EDID	15
7" WUXGA	15
Absolute Max Ratings.....	16
Electrical Characteristics	16
Use Case.....	17
External PWM Control	18
Warnings.....	19
Appendix 1: Mechanical Drawing	20

Revision History

Document Revision

Date	Version #	Description	Created By	Checked By	Quality Approval By	Approved By
4.18.2025	0.1	Preliminary Release	ST	LH	--	JH
5.30.2025	1.0	Production Release, updated drawing, updated Hardware Revision from 0.1 to 1.0, updated Ordering Information table from LCDK282CTL1ARH01R0.1 to LCDK282CTL1ARH01R1.0, LCD282-070CTL1ARNTTR0.1 or LCD282-070CTL1ARNTTR0.2 to LCD282-070CTL1ARNTTR1.0, LCDK282CTL1ACH01R0.1 to LCDK282CTL1ACH01R1.0, and LCD282-070CTL1ACNTTR0.2 or LCD282-070CTL1ACNTTR0.3 to LCD282-070CTL1ACNTTR1.0	ST	LH	TT	JH
6.25.2025	1.1	Drawing updated. Updated Hardware Revision from 1.0 to 1.1, revised Ordering Information table PCB-L00149R2.0 to PCB-L0191R1.0, revised Carrier Board – 3D Rendering and Carrier Board-Mechanical Drawing from PCB-L0149R2.0 to PCB-L0191R1.0, revised Connector table 4 POS Header S202 to 3 POS, revised Pin Out-S202, PWM to 3 pin, revised External PWM Control from PCB-L0149R2.0 to PCB-L0191R1.0, revised Warnings replacing PCB-L0149 with PCB-L0191	ST	ZA	TT	JH
8.7.2025	1.2	Added PCB-L0074R1.2 to Ordering Information table, added SODIMM – 3D Rendering PCB-L0074R1.2 image	ST	ZA	TT	JH

Hardware Revision

Date	Version #	Description
3.20.2025	0.1	Initial Release
5.29.2025	1.0	Production Release
6.6.2025	1.1	Updated PCB-L0149 to PCB-L0191

Lincoln Technology Solutions
Confidential

Ordering Information

LTS Part #	Parts in Kit	Name (Description)
LCDK282CTL1ARH01R1.1	PCB-L0191R1.0	Carrier Board (7 Inch, HB)
	PCB-L0074R1.2 or PCB-L0074R1.3	SODIMM (HDMI to MIPI)
	LCD282-070CTL1ARNTTR1.0	LCD282 (7" HB Efficient White In-Cell Touch 1200 x 1920)
	0151660429 ¹	FFC (Cable FFC 40Pos 0.50mm 3")
	CHANZON 2ABL024F ¹	Power Supply (12V 2A)
LCDK282CTL1ACH01R1.1	PCB-L0191R1.0	Carrier Board (7 Inch, HB)
	PCB-L0074R1.2 or PCB-L0074R1.3	SODIMM (HDMI to MIPI)
	LCD282-070CTL1ACNTTR1.0	LCD282 (7" HB Efficient White In-Cell Touch 1200 x 1920)
	0151660429 ¹	FFC (Cable FFC 40Pos 0.50mm 3")
	CHANZON 2ABL024F ¹	Power Supply (12V 2A)

Note 1: these part numbers are subject to change and may be replaced with equivalent parts

Product Description

LCD282 requires multiple industry standard interfaces (MIPI, I2C, Backlight Driver, and various regulated voltages) which make it well-suited for a cost-efficient and high-performance product integration. However, the required interfaces may not be well supported in all evaluation and product development environments. To ease the initial evaluation and development effort with LCD282, LCDK282 is offered. LCDK282 only requires HDMI for video, USB for touchscreen data, and a single power supply.

Compatibility


High resolution MIPI panels are most commonly native portrait orientation. The two most common resolutions supported by this module are FHD (1080x1920) and WUXGA (1200x1920). It is expected the host driving HDMI can satisfy the timing requirements as found in the EDID section below. Most Windows OS systems can output the native timing requirements and furthermore are able to rotate and flip the screen. There are dozens of Linux based platforms that are compatible as well. It must be noted that if your application is only designed for landscape mode, the GUI or capable hardware block must buffer and transpose from landscape to portrait, as PCB-L0074 has no external buffering capability.

General Specification


Item	Specification	Unit
Active Area--LCD282	94.5 X 151.20	mm
Backlight Type	LED White	-
Display Size	7.02	Inches
Outline Dimensions – Carrier Board + SODIMM	82(W) x 90(L) x 14(H)	mm
Outline Dimensions – FFC (Flat Flexible Cable)	76(L)	mm
Resolution	1200 X 1920	pixels

Pictorial


Carrier Board – 3D Rendering

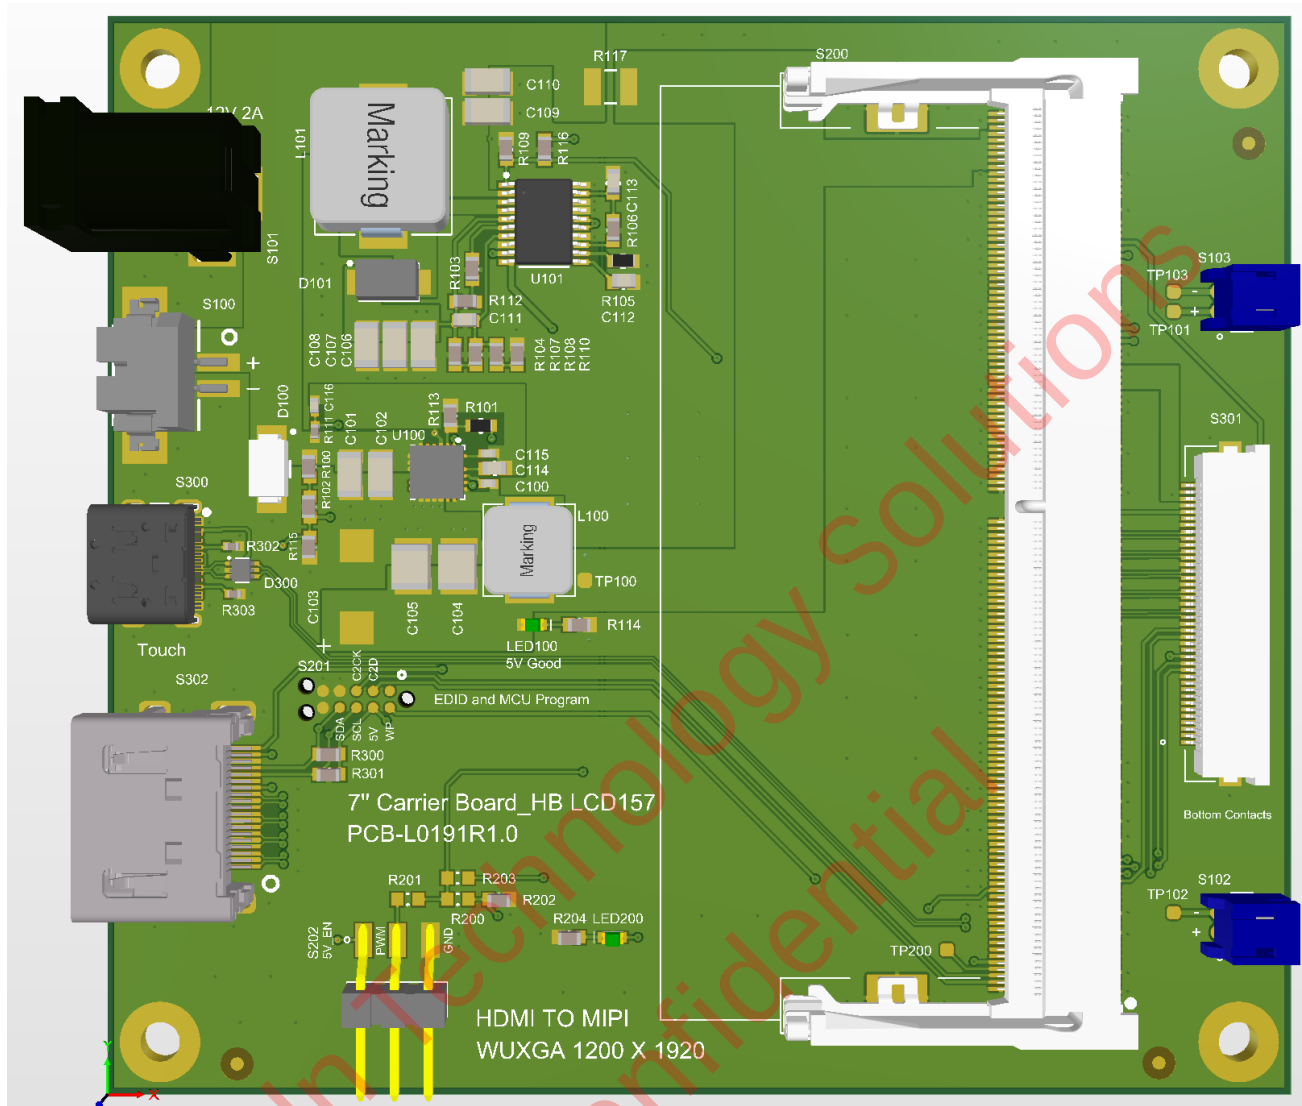


Carrier Board – Mechanical Drawing

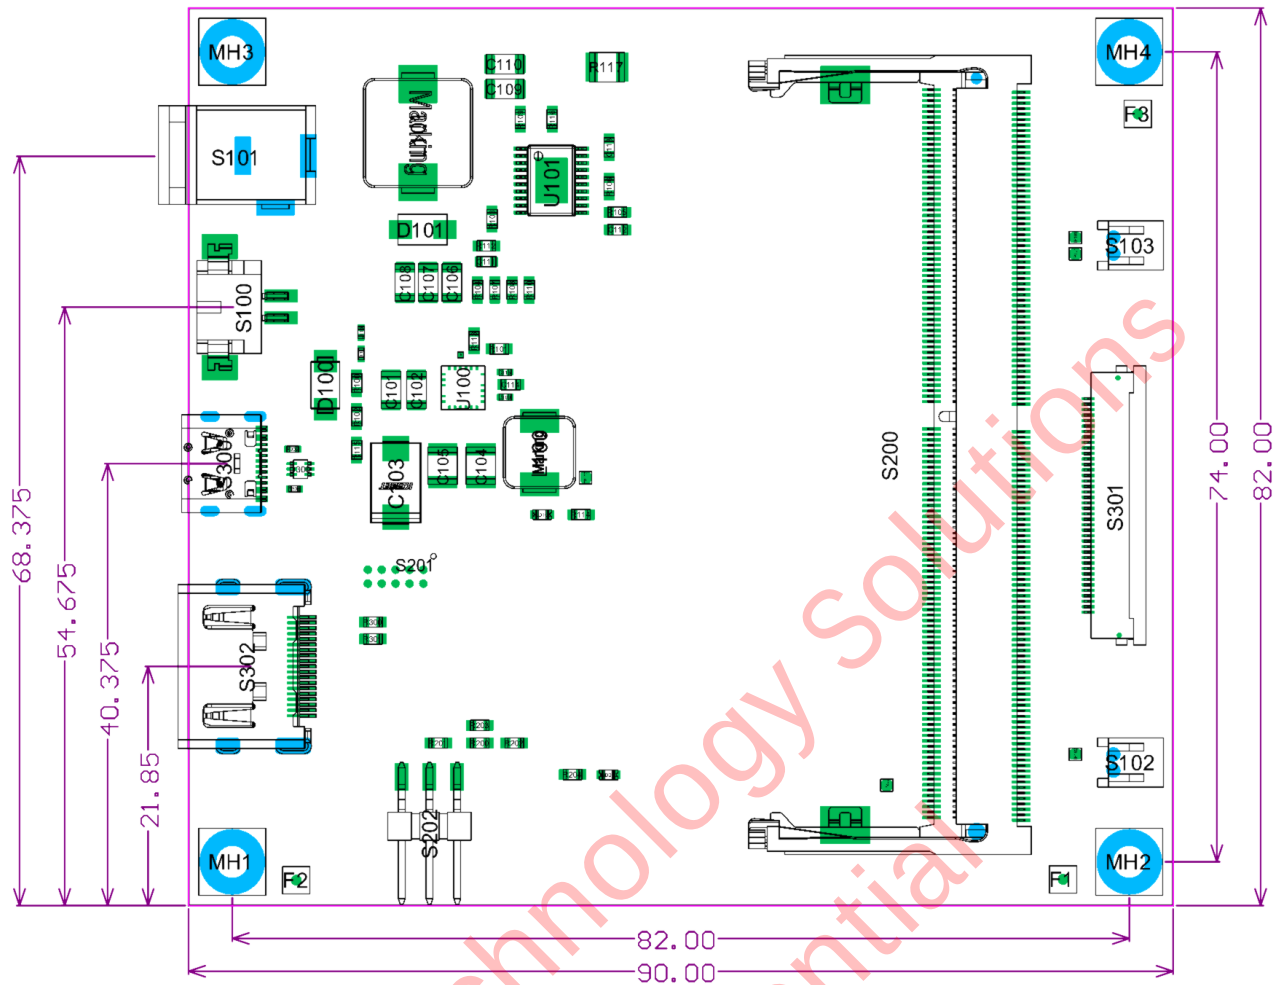





SODIMM – 3D Rendering PCB-L0074R1.2

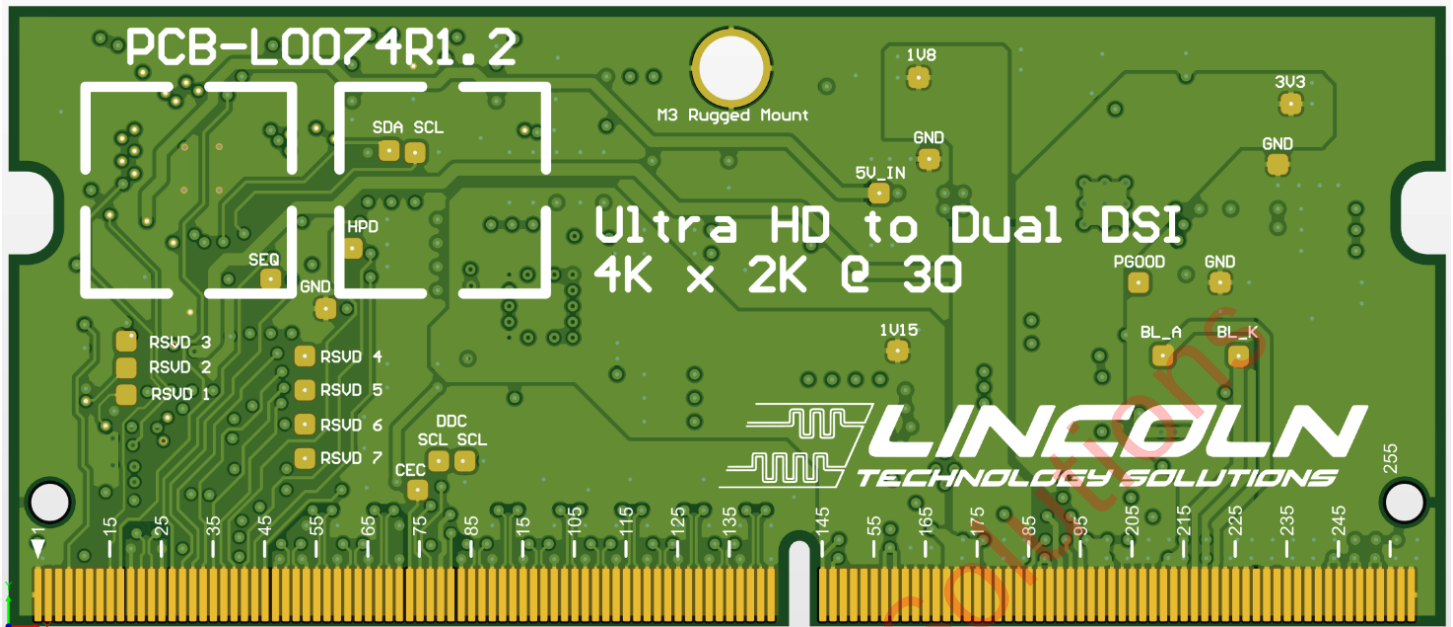


SODIMM – 3D Rendering PCB-L0074R1.3

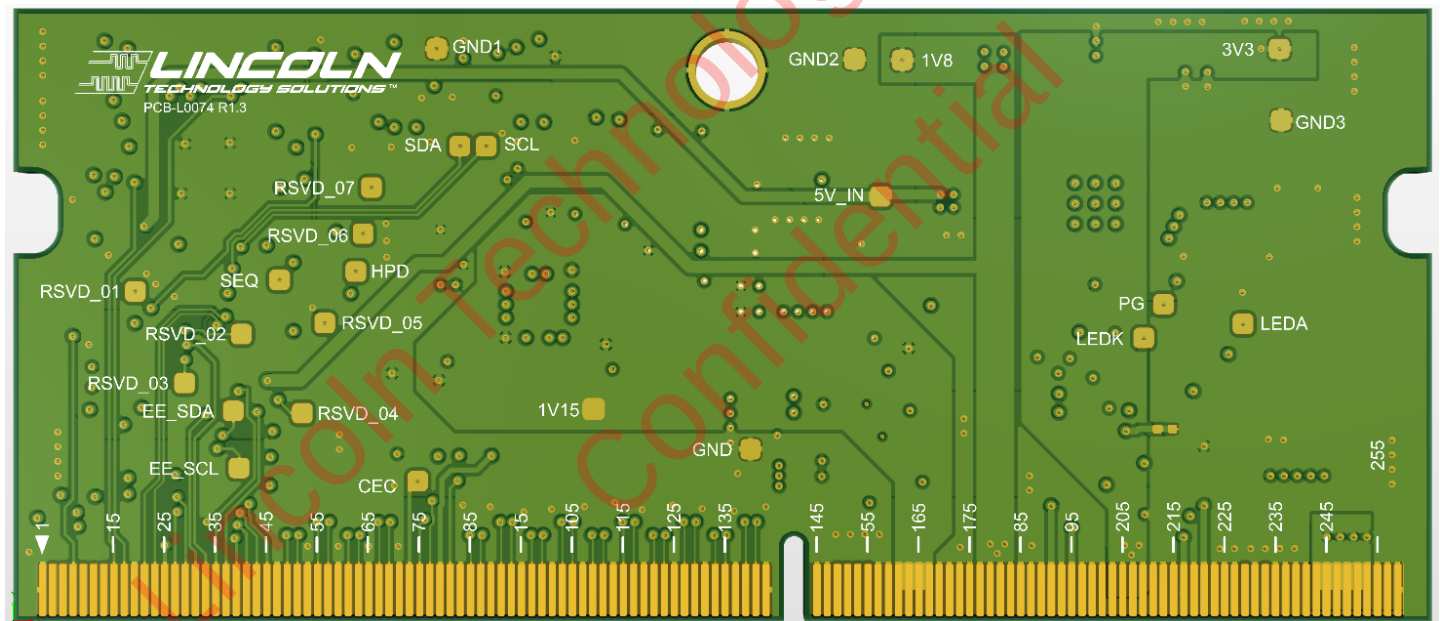

Connectors

Connector Type	MPN	Description
Power Jack S101 	PJ-002AH	Power input (VCC) 2.10mm ID (0.083") 5.50mm OD (0.217") 12V/2A input
2 POS Power Connector S100 	DF3EA-2P-2H(21)	Alternate power input connector 12V/2A input
USB Type C S300 	TYPE-C-31-M-12	Touch output USB-C 16 position
HDMI S302 	0471510001	Graphic input Standard Type A 19 position

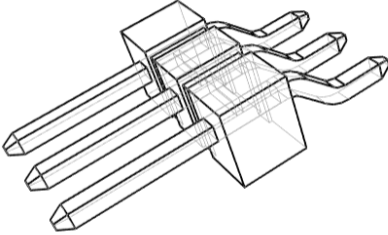3 POS Header S202 	TSM-103-01-T-SH	3 position header for 5V enable and external PWM control
--	-----------------	--

Pin Out – S300, USB-C

The USB-C is a standard connector supporting USB connection between the Carrier Board and a USB Host (i.e. PC). The Carrier Board translates the in-cell touchscreen data from I2C to USB-HID at full speed data rates.

Pin Out – S302, HDMI

The HDMI connector is a standardized type A. It is plug and play with standard equipment. The graphical input must be capable of providing a WUGXA portrait image (1200x1920). There is onboard EDID that communicates with user equipment specifying timing and display size.

Pin Out – S101, Power Jack

Number	Pin Name	Description
1	VCC	12V power supply input
2	GND	Ground
3	GND	Ground

Pin Out – S100, 2 pin Power

Number	Pin Name	Description
1	VCC	12V power supply input
2	GND	Ground

Pin Out – S202, PWM

A 0.1" pitch header is provided as optional user flexibility. It is possible to control the enabling aka power on of the SODIMM. It is also possible to provide an external PWM signal.

Number	Pin Name	Description
1	5V_EN	Enable for 5V, enable: 1.6V ~ 6V, disable: <0.5V
2	PWMO_EXT	External PWM control
3	GND	Ground

The PWM signal is pulled high by default making the backlight fully on. There are three different ways to control PWM signal.

1. PWM control by SODIMM.
2. PWM control by LCD282.
3. PWM control by external signal using the connector S202 pin2.

If assistance with control of LCD dimming is needed, contact LTS.

EDID

Below is the EDID stored on the SODIMM. This is communicated over the DDC bus to the host. The host must be capable of generating timing based on these parameters. In the absence of EDID communication, it is expected the host is capable of video output using these timing specifications.

7" WUXGA

Native Portrait 1200x1920

EDID BYTES:

Byte Array																
	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	00	FF	FF	FF	FF	FF	FF	00	32	8D	00	00	00	00	00	00
10	2D	1B	01	04	80	58	32	78	22	EE	91	A3	54	4C	99	26
20	0F	50	54	00	00	00	01	01	01	01	01	01	01	01	01	01
30	01	01	01	01	01	01	28	3C	80	50	40	80	54	70	18	08
40	84	00	C4	8E	21	00	00	1E	00	00	00	10	00	00	00	00
50	00	00	00	00	00	00	00	00	00	00	00	00	00	10	00	00
60	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	FC
70	00	31	32	30	30	06	35	08	32	30	0A	20	20	20	00	07
80	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
90	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
A0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
B0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
C0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
D0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
E0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
F0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00

Pixel Clock: 154.00

☐ Interlaced

H. Active Pixels: 1200
V. Active Lines: 1920

H. Blank: 80
V. Blank: 84

H. Front Porch: 24
V. Front Porch: 8

H. Sync Width: 8
V. Sync Width: 4

H. Image Size: 708
V. Image Size: 398

H. Border: 0
V. Border: 0

H. Clock: 120.31 kHz
V. Clock: 60.03 Hz

CVT 1.2 Wizard

Stereo Viewing Support

☒ No Stereo

☐ FS, R on sync
☐ 2Way, R on even

☐ FS, L on sync
☐ 2Way, L on even

☐ Side-By-Side
☐ 4Way

Sync Signal Definition

☐ Analog
☐ Bipolar Analog

☐ Digital Composite
☒ Digital Separate

☒ V. Sync Polarity
☒ H. Sync Polarity

Absolute Max Ratings

Item	Symbol	Value		Unit
		Min.	Max.	
Power Supply Voltage	VCC	-0.3	13	V
Operating Temperature	T _{OPR}	-20	70	°C
Storage Temperature	T _{STG}	-30	80	°C

Electrical Characteristics

Total Power is for SODIMM + Carrier Board + LCD282 (with backlight). Backlight Power can be reduced with the PWM signal that is available on S202 on the Carrier Board.

Item	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Supply Voltage	VCC	11.4	12.0	12.6	V	Ta = 25°C
Total Power	P _{TOT}	-	11	-	W	Ta = 25°C, PWM = 100%
Backlight Power	P _{BL}	-	9.5	-	W	Ta = 25°C, PWM = 100%

Note: Operating LCDK282 backlight at 100% PWM for extended periods and/or in enclosed spaces or high ambient temperatures can lead to thermal concerns. If any component surface temperature reaches 60°C, use some form of thermal management (active or passive) or use External PWM control to prevent further temperature increase.

Use Case


1. Insert the SODIMM into the Carrier Board.
2. Use the FFC to connect LCD282 to S301 on the Carrier Board.
3. Connect the two LCD282 cabled backlight connectors to S102 and S103 on the Carrier Board.
4. Apply power using the Power Supply.
5. To send video data to LCD282, connect an HDMI cable between the video source (e.g. PC) and S302 on the Carrier Board.
6. To read touchscreen data, connect a USB cable between a PC and S300 on the Carrier Board.

Lincoln Technology Solutions
Confidential

External PWM Control

Implement the following steps on the Carrier Board to use external PWM control.

1. Remove R116 (0-ohm resistor) and place it on R201.
2. Connect external PWM signal to S202 pin2 (PWM), signal high level range from 1.17V to 6V.
3. A 0% duty cycle turns off the backlight, a 100% duty cycle provides full brightness.
4. Recommended frequency is 200Hz.

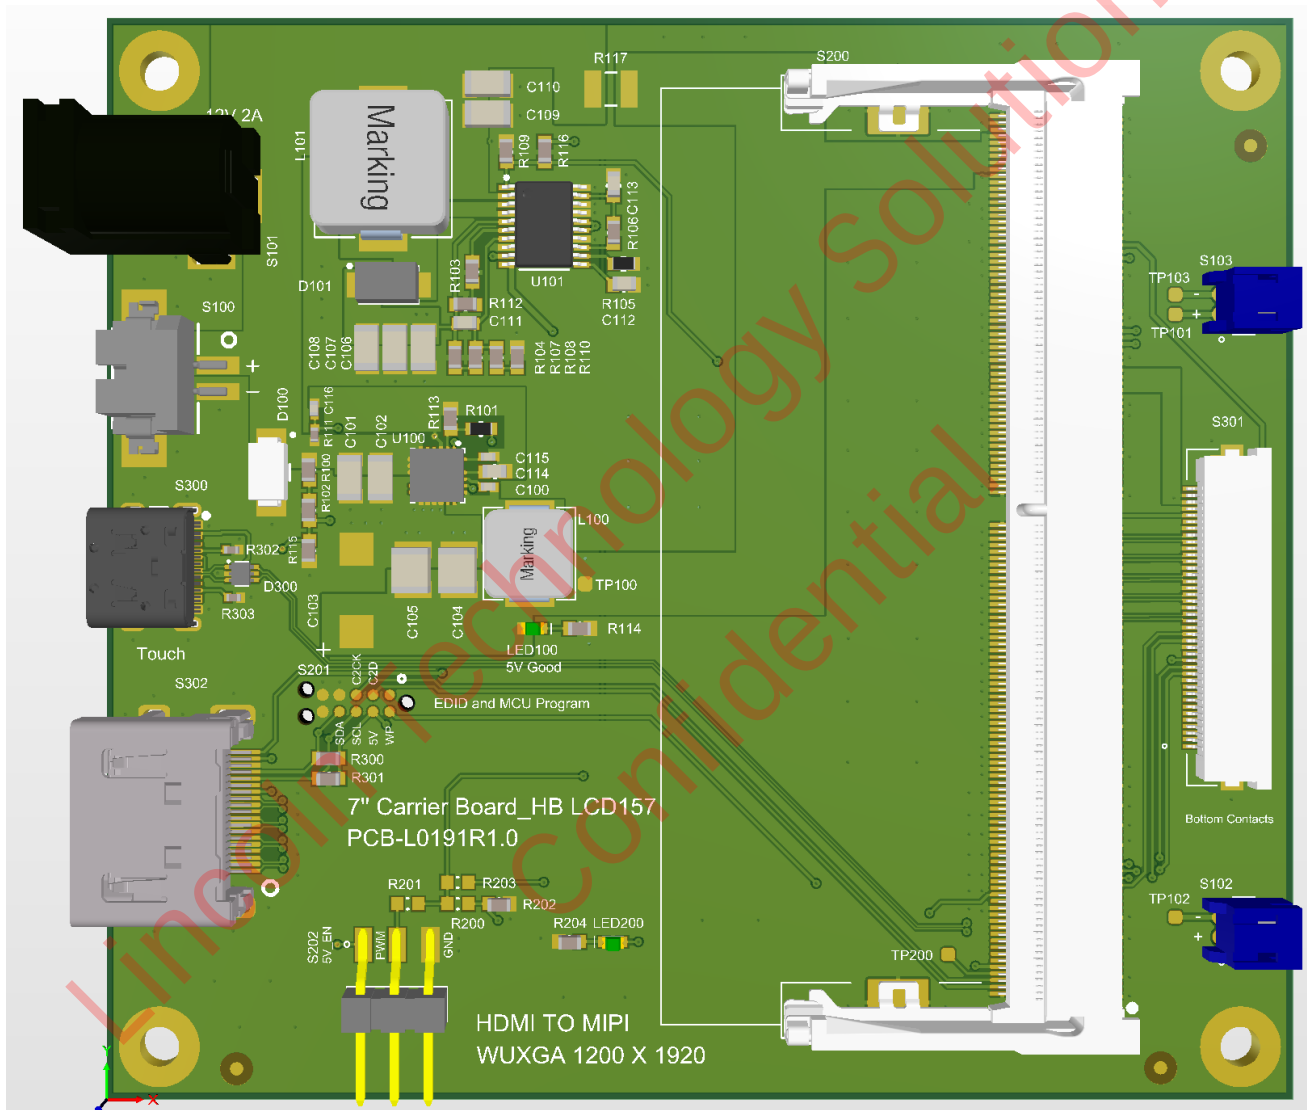

Warnings

1. Insert the SODIMM into the Carrier Board and connect LCD282 before applying power to the Carrier Board.
2. Removing the SODIMM with power connected may cause permanent damage to both the SODIMM and the Carrier Board.
3. This PCB-L0074 has been programmed for the LCD282 Module with the PCB-L0191 Carrier Board.

Lincoln Technology Solutions
Confidential

Appendix 1: Mechanical Drawing

Lincoln Technology Solutions
Confidential

8

7

6

5

4

3

2

1

ITEM NO.	KIT NO.	PART NO.	DESCRIPTION	QTY.
1	LCDK282CTL1ACH01	LCD282-070CTL1ACNTT	LCD282 PANEL	1
	LCDK282CTL1ARH01	LCD282-070CTL1ARNTT		
2	ALL	PCB-L0191	DRIVER PCB	1
3	ALL	PCB-L0074	ADAPTER PCB	1
4	ALL	MFR P/N: 0151660429	40-PIN FLEX 3IN	1
5	ALL	MFR P/N: 2ABL024F	12V 2A POWER SUPPLY	1

DRW REV.

HW REV.

DESCRIPTION

DATE

APPROVED

A

0.1

INITIAL RELEASE

3/20/2025

JH

B

1.0

PRODUCTION RELEASE

5/29/2025

JH

C

1.1

UPDATE PCB-L0149 TO PCB-L0191

6/6/2025

JH

1

2

3

4

WALL POWER
5.5MM BARREL INPUT
(12V/2A)
SEE NOTE 2

USB-C INPUT

HDMI INPUT

PIN 1 TO PIN 1

PIN 1 TO PIN 40
(BOTTOM CONTACTS,
PINS FACE DOWN)

1

NOTE(S):

1.

2.

DRAWING IS VALID FOR KIT PART NUMBERS LCDK282CTL1ARH01 AND LCDK282CTL1ACH01.

ITEM NUMBER 5 (12V 2A) IS PROVIDED WITH KIT BUT NOT DEPICTED IN DRAWING.

GENERAL TOLERANCE TABLE(±MM)

L ≤ 20	0.1
20 < L ≤ 50	0.2
50 < L ≤ 100	0.25
100 < L ≤ 200	0.3
L > 200	0.5
SCALE: 2:3	SHEET 1 OF 1
DO NOT SCALE DRAWING	

DRAWN BY:
KF

DATE
6/6/2025

CHECKED BY:
JH

DATE
6/6/2025

MATERIAL:
N/A

FINISH:
N/A

COMMENTS:
ALL DIMENSIONS ARE IN
MILLIMETERS

DESCRIPTION
KIT TO INTERFACE WITH LCD282 OVER HDMI AND USB

PART NO.
SEE NOTE 1

HW REV.
1.1

DRW REV.
C

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF LINCOLN TECHNOLOGY SOLUTIONS (LTS) AND SHALL
NOT BE REDISTRIBUTED. ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION OF LTS IS PROHIBITED.

8

7

6

5

4

3

2

1