


Data sheet

Order No.: 1027616

Type: DMCC 0,5/14-ST-2,54

PCB connector, Crimp connection

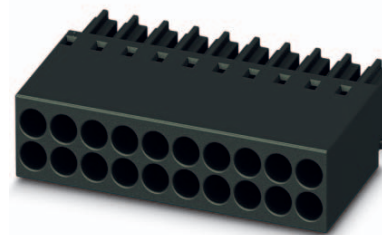

The figure shows a 10-pos. version with 20 contacts

1 Main features



- | | | | |
|---------------------------|----------------------|------------------------|---------------------|
| • No. of pos. | 14 | • Nominal current | 6 A |
| • Conductor cross section | 0.75 mm ² | • Nominal voltage | 160 V |
| • Color | black (9005) | • Connection direction | 0 ° |
| • Pitch | 2.54 mm | • Type of packaging | packed in cardboard |
| • Connection method | Crimp connection | | |

2 Your advantages

- ✓ Cost-effective connection of crimped conductors in large quantities
- ✓ Gold-plated contacts ensure transfer quality remains stable over the long term
- ✓ Contacts arranged in a double row enable high packing density in a compact area
- ✓ Tools for manual and automatic crimping available as an option



Make sure you always use the latest documentation.


It can be downloaded at: phoenixcontact.net/product/1027616

3 Table of contents

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	item properties.....	4
	5.1 Connection capacity	4
	5.2 Connection capacity AWG	4
	5.3 Material data	4
6	Dimensions.....	5
	6.1 Dimensions for the product	5
7	Series drawing.....	6
8	Packaging information	7
9	Application.....	7
	9.1 Temperature limit values	7
10	General tests	8
	10.1 Specification.....	8
11	Mechanical tests.....	8
	11.1 Tensile strength of crimped connections.....	8
	11.2 Insulating grip effectiveness (crimped connections).....	8
	11.3 Mechanical test group A	8
12	Electrical tests	9
	12.1 Electrical data	9
	12.2 Air and creepage distances	9
13	Current carrying capacity/derating curves	10
14	Environmental and durability tests	11
	14.1 Vibration test	11
	14.2 Railway application, vibration test	11
15	Classification for connectors.....	11
16	Approvals	11
17	Commercial Data.....	12
18	corresponding headers.....	12
19	Accessories.....	12
20	Combination tests.....	13

1027616 DMCC 0,5/14-ST-2,54

4 3D model in PDF can be activated (Acrobat Reader only)

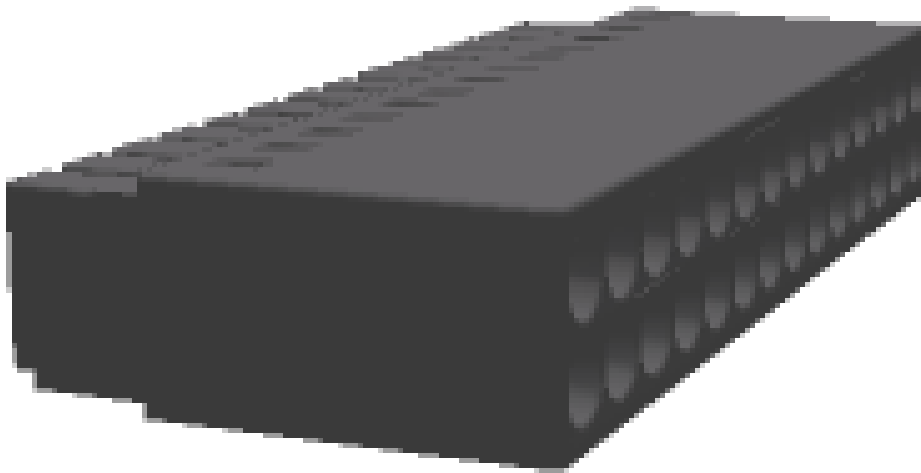

1027616 DMCC 0,5/14-ST-2,54**5 item properties**

Order No.	1027616
Type	DMCC 0,5/14-ST-2,54
Plug-in system	MICRO COMBICON - DFMC 0,5
Product type	PCB connector
Type of contact	Female connector
Range of articles	DMCC 0,5/...-ST
Pitch	2.54 mm
Range of positions	2...16
Number of positions	14
Number of levels	2
Number of connections	28
Number of potentials	28
Connection method	Crimp connection
Type of locking	without
	without
Connection direction of the connector to the PCB	
Solder pins per potential	1
Type	Standard

5.1 Connection capacity

Conductor cross section, flexible	0.14 mm ² ... 0.75 mm ² (Maximum external diameter of the insulation 1.9 mm)
Stripping length	4.1 mm ... 4.5 mm

5.2 Connection capacity AWG

Conductor cross section AWG	26 ... 18 (Maximum external diameter of the insulation 1.9 mm)
-----------------------------	--

5.3 Material data

Material of metal parts	
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	Selective coating
Insulating material data	
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Color	black (9005)
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

1027616 DMCC 0,5/14-ST-2,54**6 Dimensions****6.1 Dimensions for the product**

Length	16 mm
Width	36.06 mm
Total height	6.49 mm
Dimension a	33.02 mm

1027616 DMCC 0,5/14-ST-2,54

7 Series drawing

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerances specifications do not include clearances inherent in the design.

Meiergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwahlungen geben Anlass zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designregistrations nicht berücksichtigt. Bauraumtoleranzspiel ist in den Toleranzangaben nicht berücksichtigt.

pos.	dim. a	dim. w
2	2.54 ±0.10	5.58 ±0.10
3	5.08 ±0.10	8.12 ±0.15
4	7.62 ±0.15	10.66 ±0.15
5	10.16 ±0.15	13.20 ±0.15
6	12.70 ±0.15	15.74 ±0.15
7	15.24 ±0.15	18.28 ±0.20
8	17.78 ±0.15	20.82 ±0.20
9	20.32 ±0.20	23.36 ±0.20
10	22.86 ±0.20	25.90 ±0.20
11	25.40 ±0.20	28.44 ±0.20
12	27.94 ±0.20	30.98 ±0.20
13	30.48 ±0.20	33.52 ±0.20
14	33.02 ±0.20	36.06 ±0.20
15	35.56 ±0.20	38.60 ±0.20
16	38.10 ±0.20	41.14 ±0.20

crimp contacts are separately available

DMCC

1,45

position 1

1,52 ±0,1

2,54 ±0,1

W

11,6 ±0,15

6,49 ±0,15

16 ±0,15

1 2 3 4 5 6

1 2 3 4 5 6

DIN A3

DIN 100833 / 700

22.10.2018

1:1

Scale: 1:1

document type: DMCC 0,5/14-ST-2,54

description: DMCC 0,5/14-ST-2,54

page 1 of 1

1027616 DMCC 0,5/14-ST-2,54**8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	50

9 Application**9.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-55 °C (dependent on the derating curve)

1027616 DMCC 0,5/14-ST-2,54**10 General tests****10.1 Specification**

Specification	IEC 61984
Specification	IEC 60352-2

11 Mechanical tests**11.1 Tensile strength of crimped connections**

Result	Test passed
Specification	IEC 60512-16-4:2008-06
Conductor cross section/conductor type/tractive force setpoint/actual value	0.14 mm ² / flexible / > 18 N 0.75 mm ² / flexible / > 85 N

11.2 Insulating grip effectiveness (crimped connections)

Result	Test passed
Specification	IEC 60512-16-8:2008-05

11.3 Mechanical test group A

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	100
Insertion strength per pos. approx.	2 N
Withdraw strength per pos. approx.	2 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	20 N

1027616 DMCC 0,5/14-ST-2,54**12 Electrical tests****12.1 Electrical data**

Rated current / conductor cross section	6 A / 0.75 mm ²
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Contact resistance	
Degree of pollution	2

12.2 Air and creepage distances

Component	PCB connector		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	1.5 mm	1.5 mm	1.5 mm
Minimum value of the creepage path requirement in acc. with table	2 mm	1.5 mm	1.6 mm

1027616 DMCC 0,5/14-ST-2,54**13 Current carrying capacity/derating curves**

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	0.75 mm ²

Type: DMCC 0.5/...-ST-2.54 with DMC 0.5/...-G1-2.54 P...THR R...

1027616 DMCC 0,5/14-ST-2,54**14 Environmental and durability tests****14.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	50 m/s ² (60.1 - 150 Hz)
Test duration per axis	2 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

14.2 Railway application, vibration test

Specification	IEC 61373:2010-05
Result	Test passed
Testing	Vibration, broadband noise
Frequency	5 - 150 Hz
Test directions	X-, Y- and Z-axis (pos. and neg.)
Spectrum	Service life test category 1, class B, body mounted

15 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Cannot be reconnected
Protection against electric shock	not encapsulated - back of hand safety when plugged in
Protective conductor	without PE
Lock	no
Connection method	Crimp connections

16 Approvals

1027616 DMCC 0,5/14-ST-2,54**17 Commercial Data**

Order No.	1027616
Type	DMCC 0,5/14-ST-2,54
Pieces per package	50
Net weight	2.29 g
GTIN	4055626522760
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

18 corresponding headers

Order No.	Type
1844840	DMC 0,5/14-G1-2,54 P20THR R72
1845140	DMC 0,5/14-G1-2,54 SMD R72
1844992	DMCV 0,5/14-G1-2,54 P20THR R72
1845292	DMCV 0,5/14-G1-2,54 SMD R72

19 Accessories

Description	Order No.	Type
	1013425	MCC 0,5-MP AU 0,14-0,5
	1013420	MCC 0,5-MP AU 0,14-0,5 R
	1013419	MCC 0,5-MP AU 0,34-0,75
	1013418	MCC 0,5-MP AU 0,34-0,75 R
Crimping pliers, for COMBICON crimp connectors with cross section: 0.14 ... 0.75 mm ² . Unlockable pressure lock, precise parallel crimping, front entry, B crimp, incl. 2 positioning aids	1064998	CRIMPFOX-P CC 0.75 L

1027616 DMCC 0,5/14-ST-2,54

20 Combination tests



DMCC 0,5/..-ST



DMC 0,5/..-G1-THR

IEC 61984

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 2 N / 2 N

Polarization when inserted
Requirement >20 N

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Durability tests (B)

Contact resistance R₁ 1st level

2.2 mΩ

Contact resistance R₁ 2nd level

2.4 mΩ

Insertion/withdrawal cycles

100

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

2.95 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

1.39 kV

Thermal tests (C)

Tested number of positions

16

Tested conductor cross section

0.75 mm²

Test current

6 A

Upper limiting temperature
Requirements < 100°C

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-55 °C/2 h

Test sequence 2: heat storage

105 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)1.0 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

2.95 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

1.39 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

Degree of protection

Back of hand safety with
IP10 access probe