


1984  
 1985  
 1986  
 1987  
 1988  
 1989  
 1990  
 1991  
 1992  
 1993  
 1994  
 1995  
 1996  
 1997  
 1998  
 1999  
 2000  
 2001  
 2002  
 2003  
 2004  
 2005  
 2006  
 2007  
 2008  
 2009  
 2010  
 2011  
 2012  
 2013  
 2014  
 2015  
 2016  
 2017  
 2018  
 2019  
 2020  
 2021  
 2022  
 2023  
 2024  
 2025

Central  
 Semiconductor Corp.

Central  
 Semiconductor Corp.

Central  
 Semiconductor Corp.

145 Adams Avenue  
 Hauppauge, New York 11788



CQ3P-25B  
 CQ3P-25D  
 CQ3P-25M  
 CQ3P-25N

ISOLATED 30 AMP TRIAC  
 200 THRU 800 VOLTS

TO-3P CASE

**DESCRIPTION**

The CENTRAL SEMICONDUCTOR CQ3P-25B series types are Epoxy Molded Silicon Triacs mounted on an isolated TO-3 metal platform, designed for full wave AC control applications featuring gate triggering in all four (4) quadrants.

**MAXIMUM RATINGS** (T<sub>C</sub> = 25°C unless otherwise noted)


	SYMBOL	CQ3P -25B	CQ3P -25D	CQ3P -25M	CQ3P -25N	UNITS
Peak Repetitive Off-State Voltage	V <sub>DRM</sub>	200	400	600	800	V
RMS On-State Current (T <sub>C</sub> = 90°C)	I <sub>T(RMS)</sub>			30		A
Peak One Cycle Surge (t = 10ms)	I <sub>TSM</sub>			250		A
I <sup>2</sup> t Value for Fusing (t = 10ms)	I <sup>2</sup> t			312.5		A <sup>2</sup> s
Peak Gate Power (tp = 10µs)	P <sub>GM</sub>			40		W
Average Gate Power Dissipation	P <sub>G(AV)</sub>			1.0		W
Peak Gate Current (tp = 10µs)	I <sub>GM</sub>			10		A
Peak Gate Voltage (tp = 10µs)	V <sub>GM</sub>			16		V
Critical Rate of Rise of On-State Current						
Repetitive (F = 50Hz)	di/dt			10		A/µs
Storage Temperature	T <sub>stg</sub>		-40 to +150			°C
Junction Temperature	T <sub>J</sub>		-40 to +125			°C
Thermal Resistance	θ <sub>J-C</sub>			1.5		°C/W
Isolation Voltage	V <sub>ISO</sub>			2500		V(RMS)

**ELECTRICAL CHARACTERISTICS** (T<sub>C</sub> = 25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I <sub>DRM</sub>	Rated V <sub>DRM</sub>			0.01	mA
I <sub>DRM</sub>	Rated V <sub>DRM</sub> , T <sub>C</sub> = 125°C			6.00	mA
I <sub>GT</sub>	V <sub>D</sub> = 12V, R <sub>L</sub> = 33Ω, QUAD I,II,III			50	mA
I <sub>GT</sub>	V <sub>D</sub> = 12V, R <sub>L</sub> = 33Ω, QUAD IV			100	mA
I <sub>H</sub>	I <sub>T</sub> = 500mA			80	mA
V <sub>GT</sub>	V <sub>D</sub> = 12V, R <sub>L</sub> = 33Ω, QUAD I,II,III,IV			1.50	V
V <sub>TM</sub>	I <sub>TM</sub> = 42A, tp = 10ms			1.80	V
dv/dt	V <sub>D</sub> = 2/3 V <sub>DRM</sub> , R <sub>GK</sub> = ∞, T <sub>C</sub> = 125°C	250			V/µs

# CQ3P-25B SERIES RATING AND CHARACTERISTIC CURVES


**RMS ON-STATE CURRENT vs. CASE TEMPERATURE**

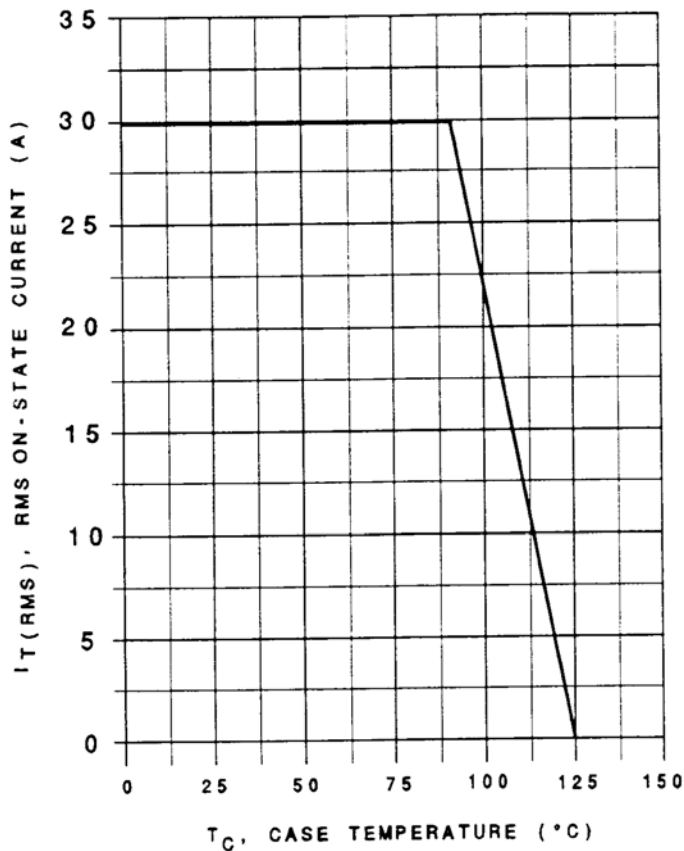

**MAXIMUM ON-STATE CHARACTERISTICS**

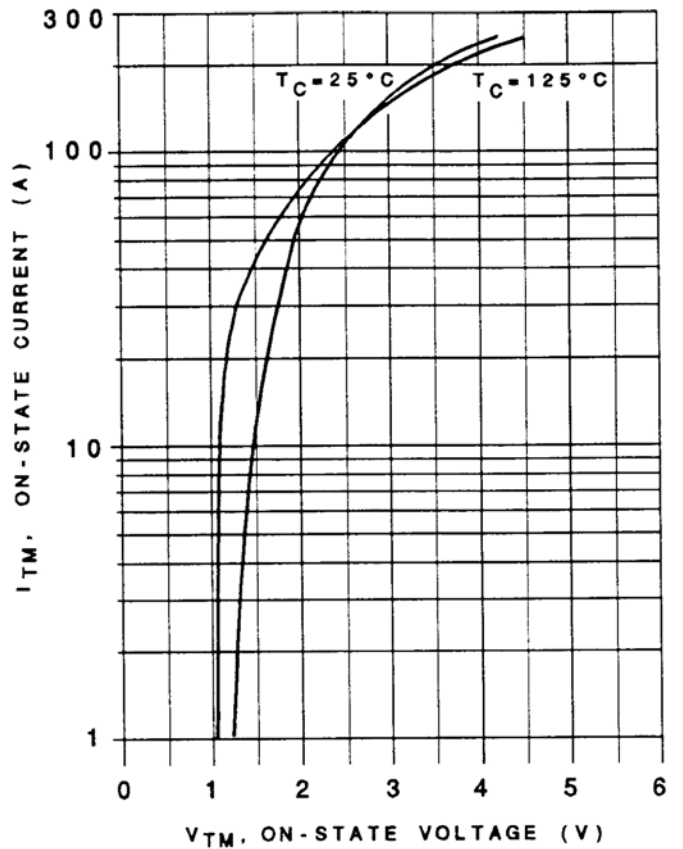

## MECHANICAL OUTLINE

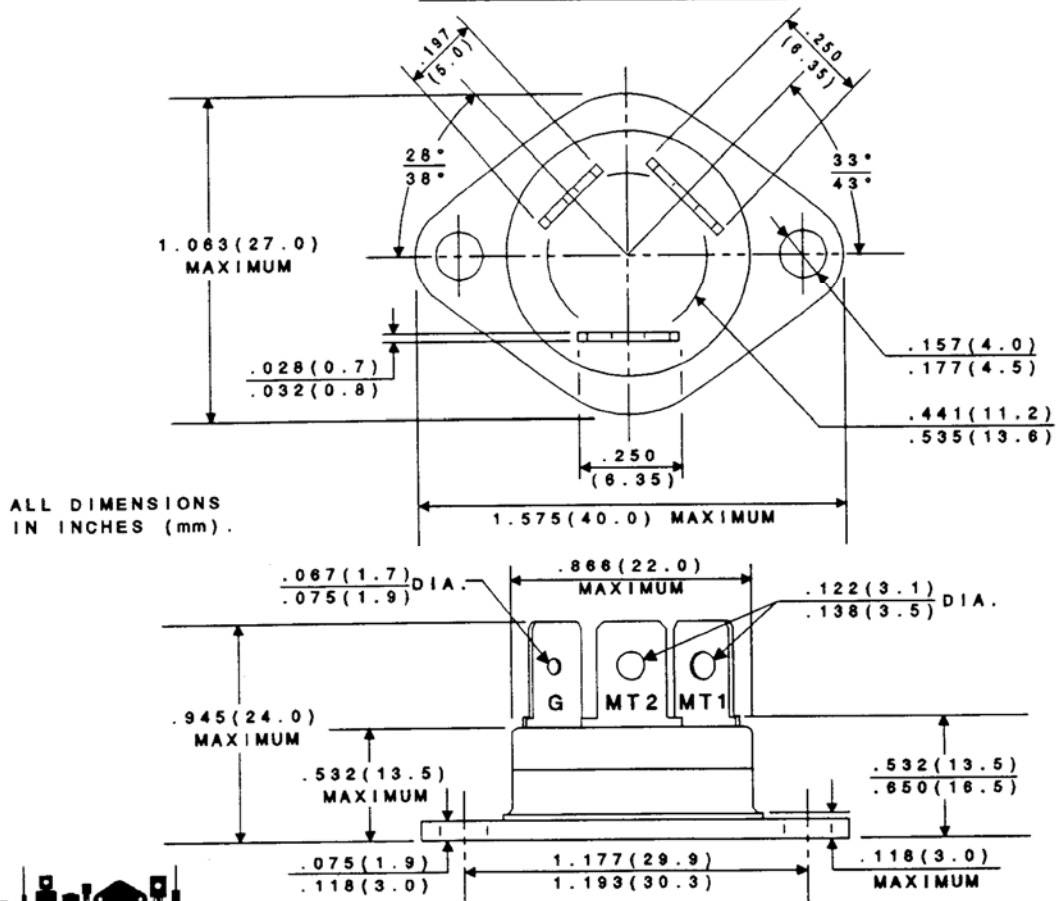

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centalsemi.com](http://www.centalsemi.com)

**Worldwide Field Representatives:**  
[www.centalsemi.com/wwreps](http://www.centalsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centalsemi.com/wwdistributors](http://www.centalsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centalsemi.com/terms](http://www.centalsemi.com/terms)



<http://www.centrasemi.com>

## Product End of Life Notification

<b>PDN ID:</b>	PDN01116
<b>Notification Date:</b>	2/21/19
<b>Last Buy Date:</b>	Stock Only
<b>Last Shipment Date</b>	Stock Only

Please be advised that Central Semiconductor must immediately discontinue the product(s) listed in the attached PDN notice. We are unable to accept any further orders for these products **unless** we have available inventory on hand.

You may have purchased one or more of the products listed. Please do not hesitate to contact your local Central Semiconductor sales representative with any questions or needs you may have. Central regrets any inconvenience this may cause.

Sincerely,

Central Semiconductor Corp.

---

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

# Product End of Life Notification

<b>PDN ID:</b>	PDN01116
<b>Notification Date:</b>	2/21/19
<b>Last Buy Date:</b>	Stock Only
<b>Last Shipment Date</b>	Stock Only

Summary: All TRIAC and SCR devices in the TO-3P package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

<u>Central Part Number</u>	<u>Replacement</u>
CQ3P-25B	N/A, Stock Only
CQ3P-25D	N/A, Stock Only
CQ3P-25M	N/A, Stock Only
CQ3P-25N	N/A, Stock Only
CQ3P-40B	N/A, Stock Only
CQ3P-40D	N/A, Stock Only
CQ3P-40M	N/A, Stock Only
CQ3P-40N	N/A, Stock Only
CS3P-40B	N/A, Stock Only
CS3P-40D	N/A, Stock Only
CS3P-40M	N/A, Stock Only
CS3P-40N	N/A, Stock Only
CS3P-40P	N/A, Stock Only
CS3P-40PB	N/A, Stock Only

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to [engineering@centrasemi.com](mailto:engineering@centrasemi.com).

**DISCLAIMER:** This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.