


### Features

- Glass Passivated Die Construction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards
- Recognized File # E157705

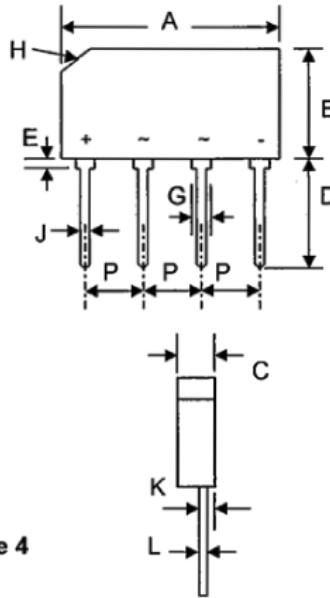

GBL		
Dim	Min	Max
A	20.7	20.9
B	10.4	10.7
C	3.25	3.56
D	17.3	18.2
E	1.50	2.03
G	2.03	2.41
H	3.17 x 45°	
J	1.02	1.27
K	1.27	1.53
L	0.46	0.56
P	4.8	5.3
All Dimensions in mm		

### Mechanical Data

- Case: GBL, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 2.0 grams (approx.)
- Mounting Position: Any
- Marking: Type Number
- **Lead Free: For RoHS / Lead Free Version, Add "-LF" Suffix to Part Number, See Page 4**

### Maximum Ratings and Electrical Characteristics @T<sub>A</sub>=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	GBL 00	GBL 01	GBL 02	GBL 04	GBL 06	GBL 08	GBL 10	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>								V
Working Peak Reverse Voltage	V <sub>RWM</sub>	50	100	200	400	600	800	1000	
DC Blocking Voltage	V <sub>R</sub>								
RMS Reverse Voltage	V <sub>R(RMS)</sub>	35	70	140	280	420	560	700	V
Average Rectified Output Current @T <sub>c</sub> = 50°C	I <sub>O</sub>	4.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	150							A
Forward Voltage per leg @I <sub>F</sub> = 2.0A	V <sub>FM</sub>	1.1							V
Peak Reverse Current @T <sub>A</sub> = 25°C At Rated DC Blocking Voltage @T <sub>A</sub> = 125°C	I <sub>R</sub>	500							μA
Typical Thermal Resistance per leg (Note 1)	R <sub>θJA</sub>	22							°C/W
Typical Thermal Resistance per leg (Note 2)	R <sub>θJL</sub>	3.5							°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150							°C

Note: 1. Mounted on 75 x 75 x 3.0mm Al. plate.  
2. Mounted on PCB at 9.5mm lead length with 12mm<sup>2</sup> copper pad.

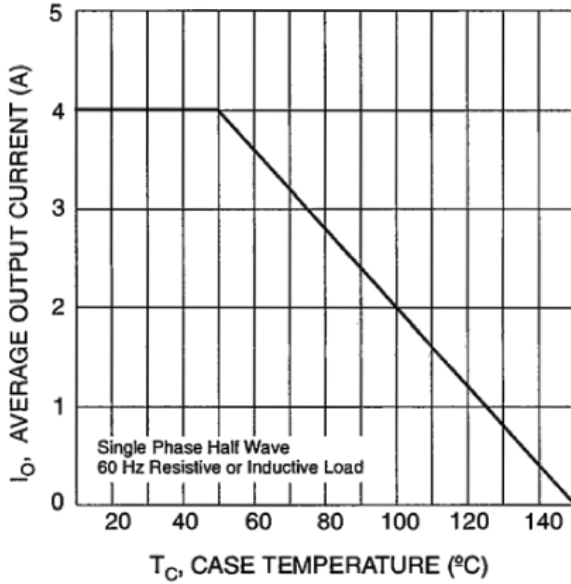


Fig. 1 Forward Current Derating Curve

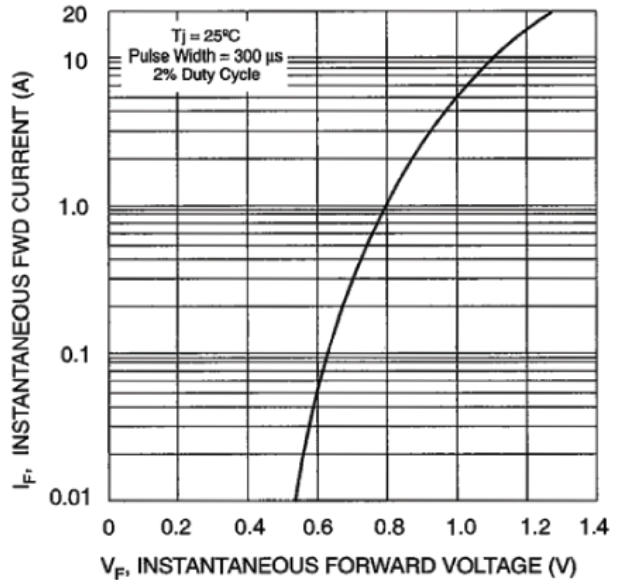


Fig. 2 Typical Forward Characteristics, per element

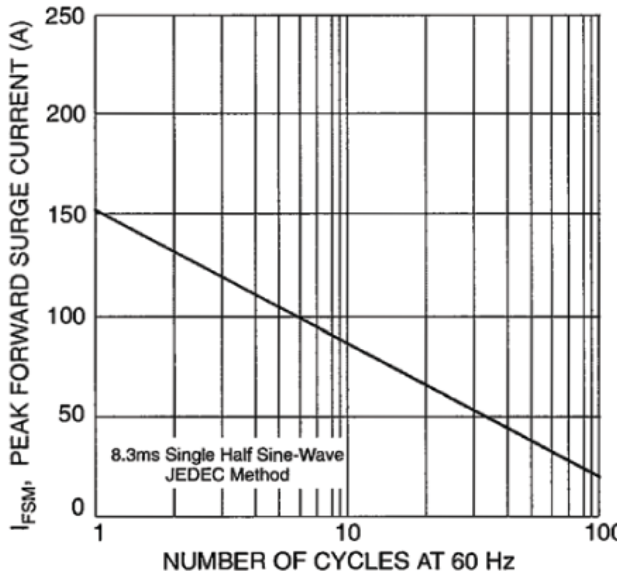


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current


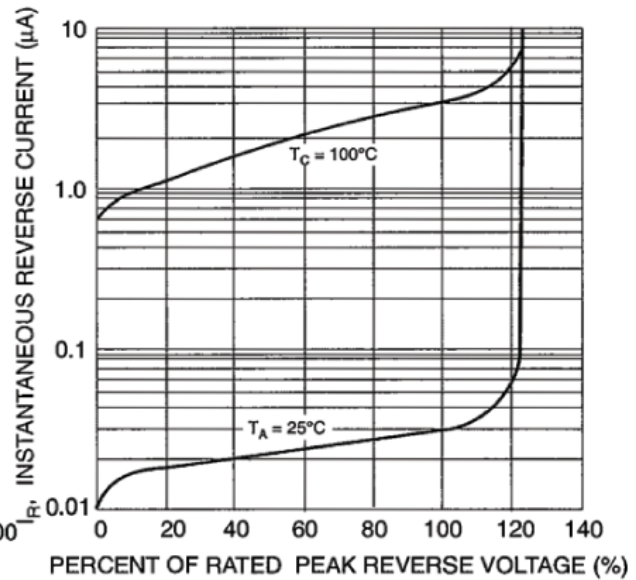


Fig. 4 Typical Reverse Characteristics, per element



**MARKING INFORMATION**



GBLxx = Manufacturer's Logo

xx = Device Number

Polarity = 00, 01, 02, 04, 06, 08 or 10

= As Marked on Body

**PACKAGING INFORMATION**

**BULK**

Tube Size L x W x H (mm)	Quantity (PCS)	Inner Box Size L x W x H (mm)	Quantity (PCS)	Carton Size L x W x H (mm)	Quantity (PCS)	Approx. Gross Weight (KG)
443 x 31 x 6	20	450 x 136 x 72	800	495 x 245 x 180	2,400	10.0

**Note:** 1. Anti-static tube, water clear color.



**ORDERING INFORMATION**

<b>Product No.</b>	<b>Package Type</b>	<b>Shipping Quantity</b>
GBL00	SIL Bridge	20 Units/Tube
GBL01	SIL Bridge	20 Units/Tube
GBL02	SIL Bridge	20 Units/Tube
GBL04	SIL Bridge	20 Units/Tube
GBL06	SIL Bridge	20 Units/Tube
GBL08	SIL Bridge	20 Units/Tube
GBL10	SIL Bridge	20 Units/Tube

1. Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
2. To order Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, GBL00-LF.

Surge Components Inc.  
95 East Jefryn Boulevard  
Deer Park, NY 11729  
Tel: 631-595-1818  
[www.surgecomponents.com](http://www.surgecomponents.com)

*We power your everyday.*