

CP A BATTERY 24V DC1.3AH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The Weidmüller battery modules consist of high-quality Panasonic batteries. These are sealed, maintenance-free lead-fleece batteries. The battery modules are fitted with a temperature sensor to provide optimum battery charging and battery life. This facilitates temperature-compensated charging of the batteries.

The neat design as well as the plug-in connections for the battery connection and the temperature sensor allow the batteries to be fitted safely and quickly.

General ordering data

Version	Battery
Order No.	1406930000
Type	CP A BATTERY 24V DC1.3AH
GTIN (EAN)	4050118221978
Qty.	1 pc(s).
Delivery status	This article will no longer be available in the future.
Available until	2021-07-31
Alternative product	2789890000

Creation date December 14, 2021 11:01:20 PM CET

Catalogue status 30.11.2021 / We reserve the right to make technical changes.

CP A BATTERY 24V DC1.3AH

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	124 mm	Depth (inches)	4.882 inch
Height	148 mm	Height (inches)	5.827 inch
Width	52 mm	Width (inches)	2.047 inch
Net weight	1,650 g		

Temperatures

Storage temperature	-15 °C...40 °C	Ambient temperature	0°...+40°C (Charging); -15°...+50°C (Discharging)
Operating temperature	0 °C...40 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Operating interfaces and control inputs

Temperature probe	NTC 100 kΩ
-------------------	------------

Input

Charging current, max.	0.2 A	Nominal capacity	1.3 Ah
Rated input voltage	24 V DC		

Output

Output current, max.	15 A	Overload and short circuit protection	15 A fuse
Parallel connection option	Yes	Protection against inverse voltage	Yes
Temperature probe	NTC 100 kΩ		

General data

Clip-in foot	metal	Max. perm. air humidity (operational)	5 %...95 % RH
Operating temperature	0 °C...40 °C	Shock wall acc. to IEC 68227	30 g
Vibration DIN rail/wall in accordance with IEC 68-2-6	0.7 / 0.7 g		

Insulation coordination

Protection class	III, with no ground connection, for SELV
------------------	------------------------------------------

Connection data (input)

Conductor cross-section, AWG/kcmil , max.	12	Conductor cross-section, AWG/kcmil , min.	30
Conductor cross-section, flexible , min.	0.2 mm ²	Conductor cross-section, rigid , max.	4 mm ²
Conductor cross-section, rigid , min.	0.2 mm ²	Wire connection cross section, flexible (input), max.	4 mm ²

CP A BATTERY 24V DC1.3AH

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Connection data (output)

Conductor cross-section, AWG/kcmil , max.	12	Conductor cross-section, AWG/kcmil , min.	30
Conductor cross-section, flexible , max.	4 mm ²	Conductor cross-section, flexible , min.	0.2 mm ²
Conductor cross-section, rigid , max.	4 mm ²	Conductor cross-section, rigid , min.	0.2 mm ²
Number of terminals	2 (+ / -)		

Connection data (signal)

Number of terminals	2	Wire connection method	Pluggable screw connection
Wire cross-section, AWG/kcmil , max.	12	Wire cross-section, AWG/kcmil , min.	30
Wire cross-section, solid , max.	4 mm ²	Wire cross-section, solid , min.	0.2 mm ²

Approvals

Certificate No. (GERMLLOYD)	61934-14	Certificate no. (cULus)	E349959
Institute (GERMLLOYD)	GERMLLOYD	Institute (cULus)	CULUS

Classifications

ETIM 6.0	EC002850	ETIM 7.0	EC002850
ETIM 8.0	EC002850	ECLASS 9.0	27-04-06-92
ECLASS 9.1	27-04-92-01	ECLASS 10.0	27-04-06-92
ECLASS 11.0	27-04-06-92		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E349959

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN_WSCAD
User Documentation	Operating instructions
Catalogues	Catalogues in PDF-format


Data sheet

CP A BATTERY 24V DC1.3AH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

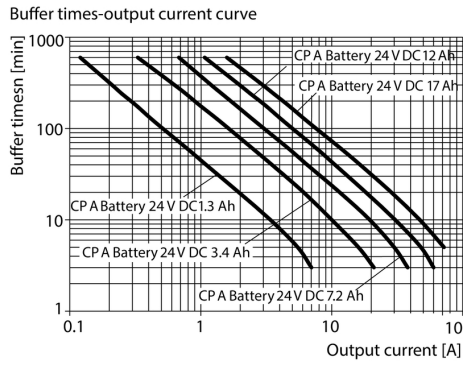

Buffer Time