
	THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1						
REV	REV DESCRIPTION DATE BY						
А	INITIAL RELEASE	10/28/22	YA				

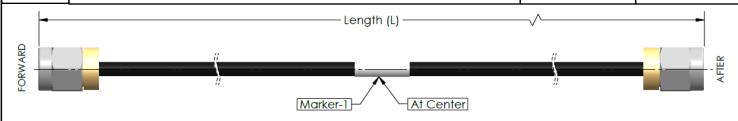

Dwg. Number	Customer P/N	Times P/N	Length(L) in 'inch'
IE-00416-01	-	IBPS092-KMKM-6.0IN	6 +0.20/-0
IE-00416-02	-	IBPS092-KMKM-8.0IN	8 +0.20/-0
IE-00416-03	-	IBPS092-KMKM-10.0IN	10 +0.20/-0
IE-00416-04	-	IBPS092-KMKM-12.0IN	12 +0.24/-0

1.0 Scope

This drawing documents the construction and performance of PT- 092 cable assemblies manufactured by Times Microwave systems.

2.0 Cable Information

- 2.1 Cable to be PT-092
- 2.2 Jacket color to be Black
- 2.3 Jacket material to be Tefzel
- 2.4 Nominal cable impedance to be 50 ohms
- 2.5 Cable diameter to be 0.101" [2.57mm] (Nominal).

3.0 Connector Information

3.1 Forward Connector

Type K (M) Straight Connector (SP116)

Connector Body - Stainless Steel, Gold Plated

Center Contact - Beryllium Copper, Gold Plated

3.2 After Connector

Type K (M) Straight Connector (SP116)

Connector Body - Stainless Steel, Gold Plated

Center Contact - Beryllium Copper, Gold Plated

Unless otherwise spec- ified, dimensions are in INCH. Tolerances are applicable when spec-	1	prova	als	_	F	TIMES	MICROW	/AVE SYSTEMS	
ified.	Drawn	YA	10/28/22		www.timesmicrowave.com			crowave.com	
lebeemeations contain	Checked			PT-092 CABLE ASSEMBLY					
proprietary information which is the property of	Approved				(Space Assemblies)				
i imes iviicrowave	Approved	тррготса		Size	CAGE CODE		Drawing No.:		
Systems.				А	68999		IE.	-00416-XX	
				Scale:	NA	Rev. ((A)	Sheet: 1 of 3	

	THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1								
REV	REV DESCRIPTION DATE BY								
Α	INITIAL RELEASE	10/28/22	YA						

4.0 Electrical Performance

- 4.1 Frequency range: DC 40GHz
- 4.2 Insertion loss & VSWR: As per below table,

Dwg. Number	Max. Insertion Loss in dB	Max. VSWR		
Dwg. Number	@ 40GHz	@ 40GHz		
IE-00416-01	1.34	1.40		
IE-00416-02	1.63	1.40		
IE-00416-03	1.93	1.40		
IE-00416-04	2.23	1.40		

5.0 Mechanical Performance

- 5.1 Overall Length to be specified length.
- 5.2 Minimum Bend radius is 0.437" [11.1mm].

6.0 Environmental Performance

- 6.1 Installation Temperature Range (-65°C to +150°C)
- 6.2 Storage Temperature Range (-65°C to +150°C)
- 6.3 Operating Temperature Range (-65°C to +150°C)

7.0 Marking

- 7.1 Markers are to be black text on White Color Marker Sleeve.
- 7.2 Marker Configuration to be:

Dwg. Number	Marker 1
IE-00416-01	Times Microwave Systems IBPS092-KMKM-6.0IN \$\$\$\$\$
IE-00416-02	Times Microwave Systems IBPS092-KMKM-8.0IN \$\$\$\$\$
IE-00416-03	Times Microwave Systems IBPS092-KMKM-10.0IN \$\$\$\$\$

Unless otherwise specified, dimensions are in INCH. Tolerances are applicable when specified.				TIMES MICROWAVE SYSTEMS				
	Drawn	YA	10/28/22				www.timesmicrowave.com	
These drawings and specifications contain proprietary information	Checked			PT-092 CABLE ASSEMBLY (Space Assemblies)				_
which is the property of	Annroved					(Spai	biles)	
i imes iviicrowave	прргочес			Size	.		Drawing No.: IE-00416-XX	
Systems.				Α				
				Scale:	NA	Rev. ((A)	Sheet: 2 of 3

	THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1						
REV	REV DESCRIPTION DATE BY						
Α	INITIAL RELEASE	10/28/22	YA				

IE-00416-04	Times Microwave Systems IBPS092-KMKM-12.0IN \$\$\$\$\$
	ቅቅቅቅ ቅ

- 7.3 \$ = 5-digit Serial Number for this specific configuration.
- 7.4 Register to be Maintained for Serial Number.

8.0 NOTES

- 8.1 All Dimensions are in INCH.
- 8.2 Assemblies built in Class 100,000 clean room.
- 8.3 Low outgassing materials per ASTM E595.
- 8.4 Unless Otherwise Specified: Tolerance will be,

Linear Dimension	Tolerance
<20 INCH	±0.4 INCH
20-79 INCH	±0.6 INCH
>79 INCH	±0.8 INCH

^{**}Tolerances are not accumulative.

Unless otherwise specified, dimensions are in INCH. Tolerances are applicable when specified.	l	prova	als	7		TIMES MICROWAVE SYSTEMS			
	Drawn	YA	10/28/22		www.timesmicrowave.com			crowave.com	
These drawings and specifications contain proprietary information	Checked			PT-092 CABLE ASSEMBLY					
which is the property of	Approved				(Space Assemblies)				
I imes iviicrowave	Approved	.pproved S		Size	Size CAGE CODE		Drawing No.:		
Systems.				А	68999		IE-00416-XX		
				Scale:	NA	Rev. ((A)	Sheet: 3 of 3	