

# OV08A10 8-megapixel product brief



available in  
a lead-free  
package

## High-Performance 8MP PureCel®Plus-S Image Sensor Optimized for Multi-Camera Smartphone Applications

OmniVision's OV08A10 is an ultra-compact 8MP image sensor built on OmniVision's second-generation, 1.0 micron PureCel®Plus-S stacked die pixel technology. Designed specifically for multi-camera applications, the 1/4.4" optical format makes it ideal for the compact space requirements of next-generation smartphones.

The sensor's customized chief ray angle (CRA) enables the OV08A10 to be used in telephoto cameras with a 2x or 3x optical zoom configuration, which offers DSLR-like image quality and user experience. Additionally, the OV08A10 is also optimized for dual-camera zoom solutions, with features such as context switching and frame synchronizing to simplify camera system architecture.

The OV08A10 brings a host of advanced imaging capabilities to smartphones, including 4-cell binning and phase-detection autofocus (PDAF), which enables sharp pictures taken in rapid succession. This sensor supports multiple resolution and frame-rate configurations with both D-PHY and C-PHY MIPI interfaces, including full-resolution 8MP images and video at 30 fps, 1080p video at 60 fps, and 720p video at 90 fps.

Find out more at [www.ovt.com](http://www.ovt.com).




## Applications

- Smart Phones
- Video Conferencing
- PC Multimedia

## Product Features

- 8MP @ 30 fps
- supports phase detection auto focus (PDAF)
- automatic black level calibration (ABLC)
- total embedded one-time programmable (OTP) memory: 1024 bytes, 512 bytes for customer use, remaining bytes for internal use
- supports typical images sizes:
  - 3264 x 2448
  - 3264 x 1836
  - 2112 x 1188
  - 1920 x 1080
  - 1408 x 792
- supports horizontal and vertical subsampling
- programmable controls for:
  - frame rate
  - mirror and flip
  - cropping
  - windowing
- 4-lane MIPI TX interface at 1 Gbps/lane and 2-lane MIPI TX interface at 1.8 Gbps/lane
- programmable I/O drive capability
- standard serial SCCB interface
- supports output formats:
  - 10-bit RAW RGB
- two on-chip phase lock loops (PLLs)
- typical module size: 8.5 x 8.5 x 4.5 mm

# OV08A10




## Ordering Information

- OV08A10-GA5A**  
(color, chip probing, 150 μm backgrinding, reconstructed wafer with good die)

## Product Specifications

- active array size:** 3264 x 2448
- maximum image transfer rate:**
  - 3264 x 2448: 30 fps
  - 3264 x 1836: 30 fps
  - 2112 x 1188: 60 fps
  - 1920 x 1080: 60 fps
  - 1480 x 792: 90 fps
- temperature range:**
  - operating: -30°C to +85°C junction temperature
  - stable: 0°C to +60°C junction temperature
- input clock frequency:** 6 - 27 MHz
- lens size:** 1/4.4"
- scan mode:** progressive
- lens chief ray angle:** 16.8°
- pixel size:** 1.008 μm x 1.008 μm
- image area:** 3322.37 μm x 2499.84 μm
- power supply:**
  - core: 1.2V
  - analog: 2.8V
  - I/O: 1.8V
- power requirements:**
  - active: 181 mW
  - XSHUTDOWN: <25 μA

## Functional Block Diagram

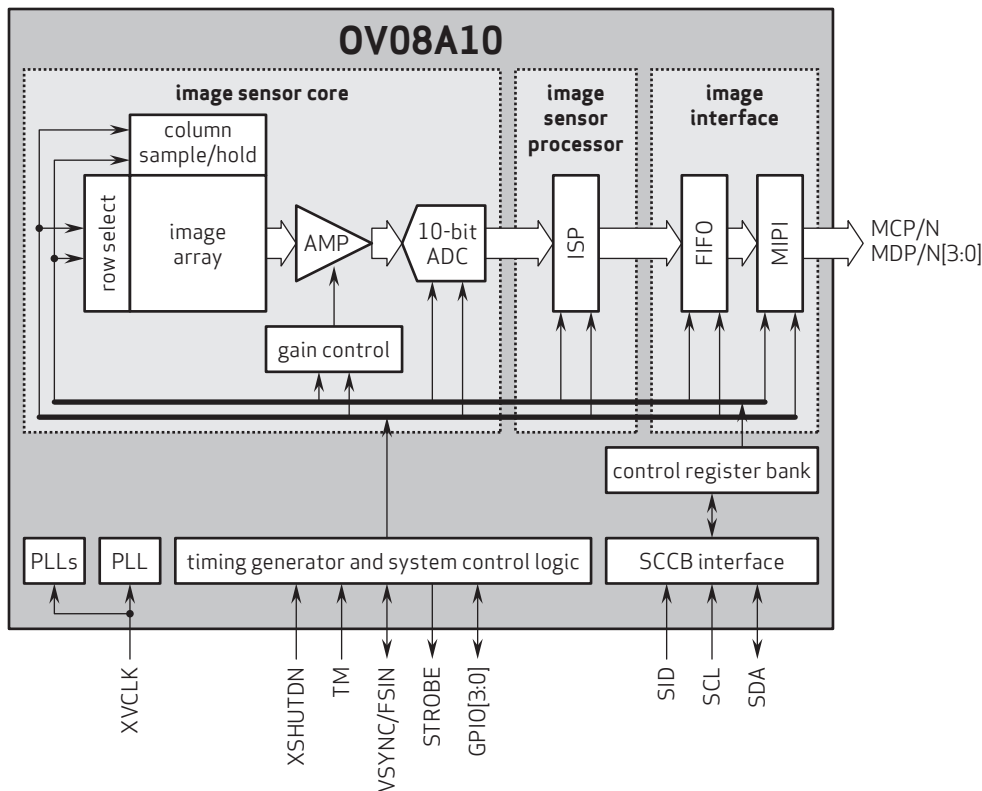

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: + 1 408 567 3000  
Fax: + 1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo, and PureCel are registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision