


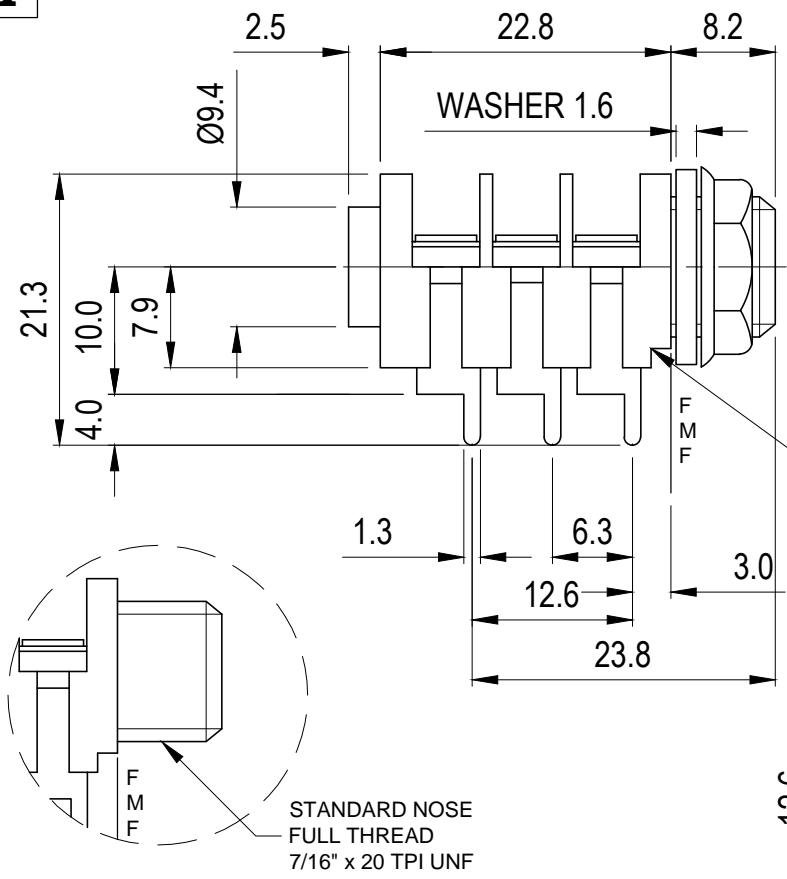


ISS.	AMEND	DATE
1	ISSUED	25/09/14

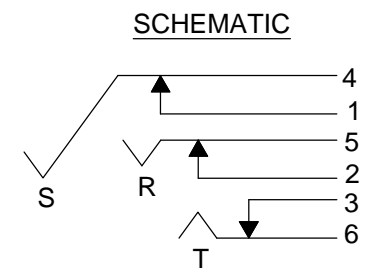


NUT + WASHER NOT SHOWN.

THIS RECESS IS TO FACILITATE MOUNTING IN FLOWSOLDER JIGS

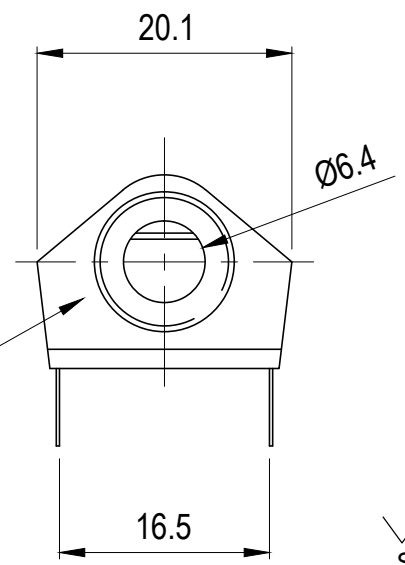

SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED, CLOSE WHEN PLUG IS WITHDRAWN.

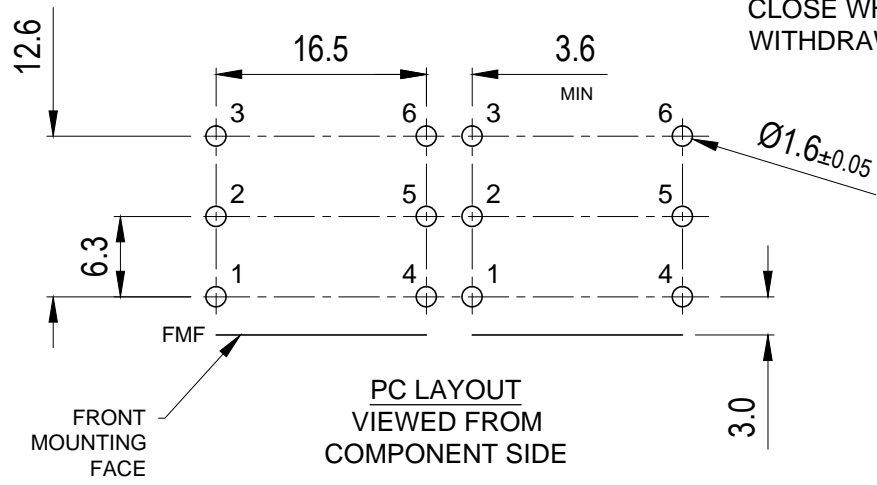

**NOTES**

- Maximum panel thickness 4.6mm.
- Supplied with nut + fibre washer assembled.

**SPECIFICATION**

Withstand voltage: 2000V DC Min.  
 Maximum Current: 5 amps  
 Temperature Rating: -10° C to +70° C  
 Life (Minimum): 10,000+ Operations  
 Nominal Contact Resistance: <50mΩ

<b>RoHS</b> COMPLIANT	
TOLERANCE	
NO DEC. PLACE ±	
1 DEC. PLACE ±	
2 DEC. PLACE ±	
HOLE Ø ±	
ANGLES ±	
UNLESS OTHERWISE STATED	

**Cliff Electronic Components Ltd.**  
 76 Holmehorpe Avenue, Holmehorpe Industrial Estate,  
 Redhill, Surrey, RH1 2PF, England, UK  
 Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 1991

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

MATERIAL: NYLON / NiAg / FIBRE  
 FINISH: AS MOULDED / MICROFINISH  
 DRAWN: TJO APPROVED: DPJ

1st DRAWN: 11/01/1991

3rd ANGLE PROJECTION:

TITLE: S2/BBB/PCA JACK SOCKET - ASSEMBLED

DRWG. No. **CL1232A** FORM: A4DRWGH