Cable / *Coaxial*

EASE electronics

Male SMA to Male SMA Coaxial Cable, 500mm, RG316 Coaxial, Terminated

RoHS Compliant

Stock No.: 4987579R015

FEATURES

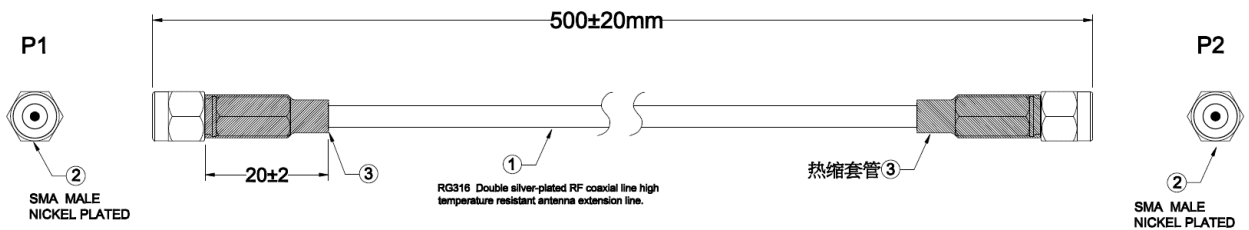- 50Ω impedance

- SMA Plug to SMA Plug

- RG316

Product Description

.
this coaxial lead is fitted with an SMA male connector at both ends. Featuring a screw-on connection, Sub-Miniature Type A connectors give a secure and reliable connection, and are widely used in telecommunication and Wireless LAN applications.

General Specifications

Attribute	Value
Connector 1	SMA
Terminated/Unterminated	Terminated
Connector 2	SMA
Coaxial Type	RG316
Connector 1 Gender	Male
Connector 2 Gender	Male
Outer Diameter	2.49mm
Characteristic Impedance	50 Ω
Length	500mm

Product Drawing

P1

500±20mm

P2

②
SMA MALE
NICKEL PLATED

20±2

③

① RG316 Double silver-plated RF coaxial line high temperature resistant antenna extension line.

热缩套管③

②
SMA MALE
NICKEL PLATED

Dimensions: Millimeters (Inches)

Part Number Table

Part Number	Description
4987579R015	Male SMA to Male SMA Coaxial Cable, 500mm, RG316 Coaxial, Terminated