

this coaxial lead is fitted with an SMA male connector at both ends. Featuring a screw-on connection, Sub-Miniature Type A connectors give a secure and reliable connection, and are widely used in telecommunication and Wireless LAN applications.


General Specifications

| Attribute | Value |
|--------------------------|------------|
| Connector 1 | SMA |
| Terminated/Unterminated | Terminated |
| Coaxial Type | RG316 |
| Connector 2 | SMA |
| Connector 1 Gender | Male |
| Connector 2 Gender | Male |
| Outer Diameter | 2.49mm |
| Characteristic Impedance | 50 Ω |
| Length | 1m |



Product Drawing



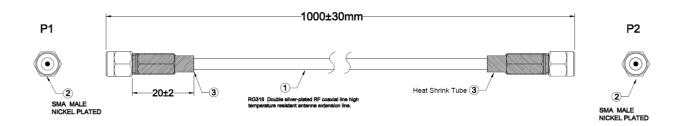

Dimensions: Millimeters (Inches)

Part Number Table

| Part Number | Description |
|-------------|---|
| 4987585R016 | Male SMA to Male SMA Coaxial Cable, 1m, RG316 Coaxial, Terminated |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Liability for loss or damage resulting from any reliance on the Information and the suitability of the products for their purpose and not make any assumptions based on the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.