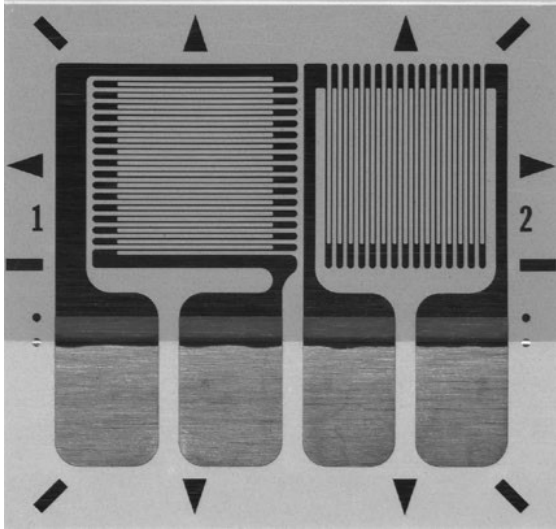


General Purpose Strain Gages—Tee Rosette

GAGE PATTERN DATA						
 <p style="text-align: center;">actual size</p>				GAGE DESIGNATION See Note 1	RESISTANCE (OHMS)	OPTIONS AVAILABLE See Note 1
				CEA-XX-125UT-120 CEA-XX-125UT-350	120 ± 0.4% 350 ± 0.4%	P2 P2
DESCRIPTION Two-element 90° tee rosette for general-purpose use. Exposed solder tab area 0.10 x 0.07 in (2.5 x 1.8 mm).						
GAGE DIMENSIONS		Legend			<input type="checkbox"/> inch <input type="checkbox"/> millimeter	
		ES = Each Section	CP = Complete Pattern			
		S = Section (S1 = Section 1)	M = Matrix			
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width	
0.125 ES	0.325 CP	0.165 ES	0.365 CP	0.42	0.45	
3.18 ES	8.26 CP	4.19 ES	9.27 CP	10.7	11.4	

GAGE SERIES DATA — See Gage Series datasheet for complete specifications			
Series	Description	Strain Range	Temperature Range
CEA	Universal general-purpose strain gages.	±5%	-100° to +350°F (-75° to +175°C)

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.