

868 MHz / 915 MHz / 1575 MHz / 5800 MHz PCB Antenna (ISM, IoT, Sigfox, LoRa, GNSS)



#### General information

This small antenna is intended to be used within a plastic housing of a mobile device, a terminal or a router. On request, the antenna geometry can be optimized for customer's housing design or other requirements.

#### Typical applications

ISM, RFID, IoT (Sigfox, LoRa), GNSS, LP-WAN, Smart meters

#### Electrical data

Antenna type	Embedded / internal PCB antenna				
Frequency band	SRD860 (EU), ISM915 (US), GNSS, ISM5800				
Frequency range [MHz]	863...870	870...928	1559...1593	1593...1610	5725...5875
Return loss [dB]	-9	-8	-5	-11	-5
Peak gain [dBi]	1.4	2	2	1.9	7
Radiation efficiency [%]	83	82	58	63	85
Nominal input impedance [Ohm]	50				
Polarization	linear				
Radiation pattern	omnidirectional				
Maximum input power [W]	10				

#### Mechanical data

Antenna PCB dimensions [mm]	45.2 x 20 x 1
Connector type <sup>1)</sup>	IPEX MHF1 / Hirose U.FL (UMCC) compatible <sup>1)</sup>
Cable type and thickness <sup>2)</sup> [mm]	micro coax 1.13 <sup>2)</sup>
Cable length <sup>3)</sup> [mm]	180 <sup>3)</sup>
PCB material	FR4

#### Environmental data

Operating temperature [°C]	-40...+85
Storage temperature [°C]	-40...+85
Ambient relative humidity [%]	0...95
RoHS / REACH compliant	yes / yes

#### Additional information

<sup>1)</sup> Other connector types can be offered on request.

<sup>2)</sup> Following cable thicknesses can be used with MHF1 connector: 0.81 mm, 1.13 mm, 1.32 mm, 1.37 mm.

<sup>3)</sup> Recommended length. Cable is not included, but can be customized and provided separately.

Antenna performance was measured using the recommended cable length in free space.


Further customization, electromagnetic simulations and measurements can be offered on request.

The antenna can be additionally equipped with adhesive tape and mounting holes.

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2023 Sevskiy GmbH. All rights reserved. No warranties.

868 MHz / 915 MHz / 1575 MHz / 5800 MHz PCB Antenna (ISM, IoT, Sigfox, LoRa, GNSS)

Measured input impedance matching

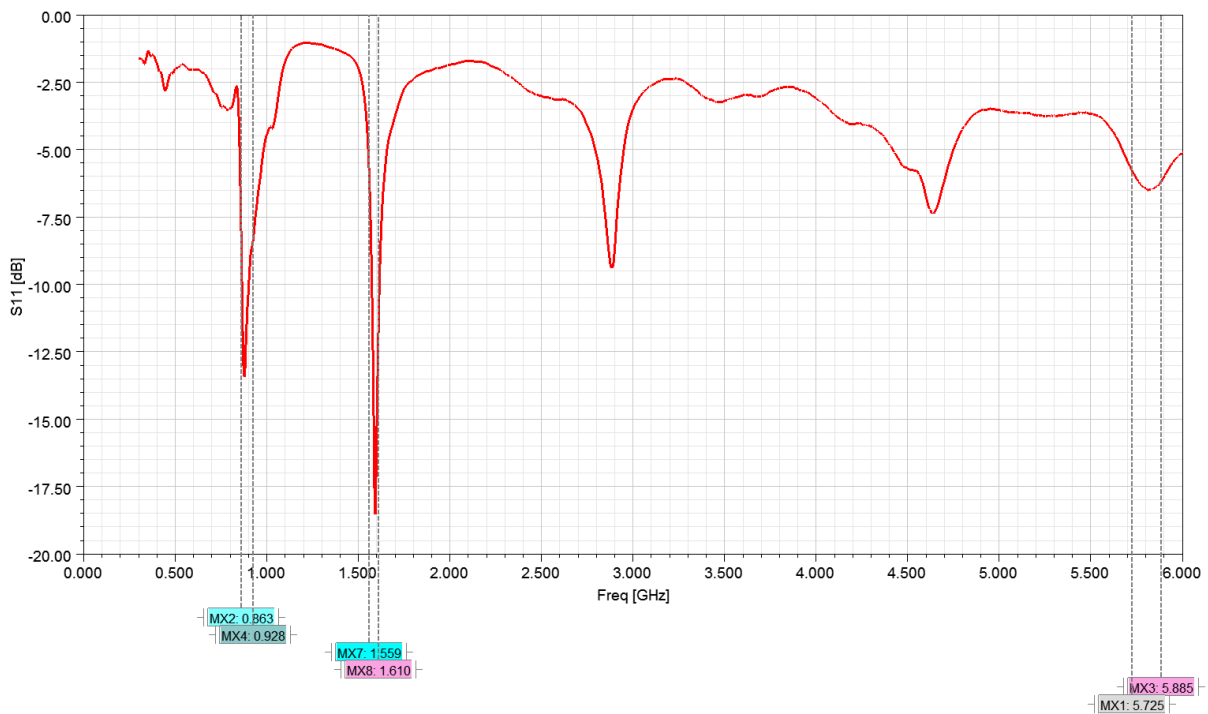

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2023 Sevskiy GmbH. All rights reserved. No warranties.