## AN240202-01C-180-MHF1

Rev. 014



E-Mail: sergey@sevskiy.de

Internet: www.sevskiy.com

868 MHz / 915 MHz / 2.45 GHz / 5.8 GHz PCB Antenna (ISM, IoT, RFID, Bluetooth, Wi-Fi, 5G NR, LTE)



#### **General information**

This small antenna is intended to be used within a plastic housing of a mobile device, a terminal or a router. On request, the antenna geometry can be optimized for customer's housing design or other requirements.

#### **Typical applications**

ISM, RFID, IoT (Sigfox, LoRa, NB-IoT), LP-WAN, Smart meters, Bluetooth, Wi-Fi 2.4 GHz, 5G NR, LTE

Electrical data								
Antenna type	Embedded / internal PCB antenna							
5G bands	5, 7, 18, 20, 26, 30, 38, 40, 41, 47, 53, 81, 82, 89, 90, 96, 97							
4G bands	5, 6, 7, 18, 19, 20, 22, 26, 27, 30, 38, 40, 41, 42, 47, 53, 69							
Other frequency bands	SRD860 (EU), ISM915 (US), ISM2400, ISM5800							
Frequency range [MHz]	791	807	824	2300	2400	2496	3400	5855
	928	890	870	2360	2495	2620	3600	5925
Return loss [dB]	-6	-10	-15	-10	-15	-9	-5	-5
Peak gain [dBi]	1.6	1.4	1.4	4	4.2	4.8	7	6.2
Radiation efficiency [%]	80	82	85	77	71	85	87	90
Nominal input impedance [Ohm]	50							
Polarization	linear							
Radiation pattern	omnidirectional							
Maximum input power [W]	10							

Mechanical data					
Antenna PCB dimensions [mm]	38 x 17 x 1				
Connector type 1)	IPEX MHF1 / Hirose U.FL (UMCC) compatible 1)				
Cable type and thickness 2) [mm]	micro coax 1.13 2)				
Cable length <sup>3)</sup> [mm]	180 <sup>3)</sup>				
PCB material	FR4				

Environmental data				
Operating temperature [°C]	-40+85			
Storage temperature [°C]	-40+85			
Ambient relative humidity [%]	095			
RoHS / REACH compliant	yes / yes			

#### **Additional information**

- 1) Other connector types can be offered on request.
- <sup>2)</sup> Following cable thicknesses can be used with MHF1 connector: 0.81 mm, 1.13 mm, 1.32 mm, 1.37 mm.
- 3) Other cable lengths can be provided.

Antenna performance was measured using the specified cable length in free space.

Further customization, electromagnetic simulations and measurements can be offered on request.

The antenna can be additionally equipped with adhesive tape and mounting holes.

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2023 Sevskiy GmbH. All rights reserved. No warranties.

Tel.: +49 89 38-90-7229

Fax: +49 89 38-90-7230


# TECHNICAL DATA SHEET

### AN240202-01C-180-MHF1 Rev. 014

**Sevskiy**®

RF & Antenna Development

868 MHz / 915 MHz / 2.45 GHz / 5.8 GHz PCB Antenna (ISM, IoT, RFID, Bluetooth, Wi-Fi, 5G NR, LTE)

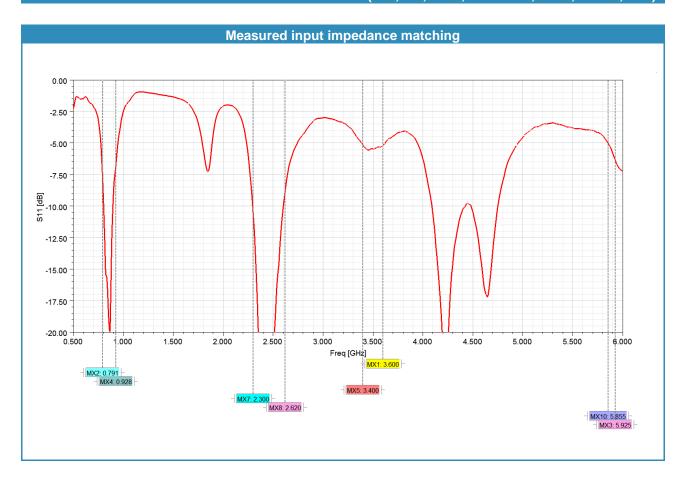

Tel.: +49 89 38-90-7229

Fax: +49 89 38-90-7230

E-Mail: sergey@sevskiy.de

Internet: www.sevskiy.com