SFML-1XX-XX-XXX-D-XXX-X-XX REVISION AZ **TABLE 1** TABLE 3 (SEE NOTE 5) **PACKAGING** "A" "B" STYLE NO OF POS **BLANK: TUBES (SEE NOTE 11)** "C" No OF POSITIONS -TR: TAPE & REEL (SEE NOTES 12 & 13) -X1 120 [3.05] .020 [.51] -05, -07 .080 [2.03] -05, -07, -08, -10 THRU -50 -FR: FULL REEL QTY TAPE & REEL SCALE FROM -X3 .075 [1.91] .016 [.41] (SEE NOTES 12 & 13) 10 THRU -50 .305 [7.75] (PER ROW) THIS PRINT (-XR N/A WITH -X1 AND -X3 LEAD STYLE, LEAD STYLE SEE FIG 2, SHT 2) -01: THROUGH HOLE "A" (USE C-44-01-XXX, SEE FIG 1, SHT 1) PICK AND PLACE OPTION -P: PICK & PLACE PAD (SEE FIG 6, SHT 3) (USE PPP-02) (NOT AVAILABLE IN 5 POS) **SURFACE MOUNT** .145 [3.68] REF (USE C-44-02-XXX, SEE FIG 3, SHT 2) -K: POLYIMIDE FILM PAD (SEE FIG 4, SHT 2) -03: STRAIGHT MODIFIED (USE C-44-03-XXX, SEE FIG 1, SHT 1) (USE K-DOT-.157-.250-.005) THROUGH HOLE (LOW INSERTION) — <u>OPTIONS</u> (LEAVE BLANK FOR STANDARD 'D' (USE C-61-01-XXX, SEE FIG 1, SHT 1 -L2: SURFACE MOUNT (LOW INSERTION AND USE SFML-XX-D) (USE C-61-02-XXX, SEE FIG 3, SHT 2) "B"**⊸** -A: ALIGNMENT PIN (USE SFML-XX-D-A) -L3: STRAIGHT MODIFIED (LOW INSERTION) .080 [2.03 120 [3.05] REF (SEE FIG 5, SHT 3) 100 2.54 (USE C-61-03-XXX, SEÈ FIG 1, SHT 1) -LC: LOCKING CLIP (SEE FIG 7, SHT 3) (USE (2) LC-05-TM & SFML-XX-D) (SEE NOTE 9) REF (TYP) -T1: THROUGH HOLE (PHOS BRONZE) .050 [1.27] REF (USE C-119-01-XXX, SEE FIG 1, SHT 1) -SN: SOLDER NAIL (USE SFML-XX-D-SN & -T2: SURFACE MOUNT (PHOS BRONZE) (SFF NOTE WT-27-01-T) (SEE FIG 8, SHT 4) (AVAILABLE ON -X2 LEAD STYLES ONLY) (USE C-119-02-XXX), SEE FIG 3, SHT 2) & TABLE 31 -SN2: SOLDER NAIL FOR .093 BOARD (USE SFML-XX-D-SN & (No OF POS x .050 [1.27] + .155 [3.94] REF WT-27-02-T) (SEE FIG 8, SHT 4) (ONLY AVAILABLE WITH -02, L2, AND T2 LEAD SFML-XX-D-STYLE. NOT AVAILABLE WITH -A, -LC OPTIONS) (No OF POS x .050 [1.27]) + .015 [.38] REF .035 [0.89] REF (TYP) **ROW SPECIFICATION** -D: DOUBLE ROW .65] REF .065 (USE SFML-XX-D-X) .180 [4.57] 4 PLATING SPECIFICATION
-S: 30µ" SELECTIVE GOLD IN CONTACT AREA, **REF** MÄTTE TIN ON TAIL -F: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, SEE TABLE 1) MATTE TIN ON TAIL -H: 30µ" HEAVY GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL .110 [2.79] .005 0.13 REF -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, REF MATTE TIN ON TAIL (EITHER DIRECTION) (SEE TABLE 1) -STL: 30µ" SELECTIVE GOLD IN CONTACT AREA, TIN/LEAD (90/10+/-5%) TAIL (ONLY AVAILABLE ON -02 AND -L2 LEADSTYLES) (No OF POS x .050 [1.27]) - .050 [1.27] 2° MAX SWAY -SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MÄTTE TIN ON TAIL (EITHER DIRECTION) -LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, SECTION "A"-"A' MÄTTE TIN ON TAIL -FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL .050 [1.27] FIG REF THROUGH HOLE/STRAIGHT MODIFIED (SHOWN: SFML-120-X1-XXX-D) NOTES:
1. © REPRESENTS A CRITICAL DIMENSION.
2. COPLANARITY: .004 [.10] FOR POS. 04 THRU 26
.006 [.15] FOR POS. 27 THRU 50
3. MINIMUM PUSHOUT FORCE: .5 LB. .020 [0.51] **REF** .060 [1.52 3. MAXIMUM ALLOWABLE BOW: .002 INCH/INCH [MM/MM] AFTER ASSEMBLY. 5. POSITIONS .05, 07 AND .08 WILL HAVE ONLY ONE LOCKING TAB AT DIMENSION SHOWN AND DETAIL 'D SECTION "B"-"B' ALTERNATE CONSTRUCTION WILL NOT HAVE POLARIZATION NOTCH; LOCKING TAB POSITIONS -10 THROUGH -24 WILL HAVE ONLY ONE LOCKING TAB AT DIMENSION SHOWN;
POSITIONS -25 THROUGH -34 WILL HAVE TWO LOCKING TABS AT DIMENSION SHOWN;
POSITIONS -35-THROUGH -50 WILL HAVE THREE LOCKING TABS: TWO AT DIMENSION UNLESS OTHERWISE SPECIFIED, PROPRIETARY NOTE SHOWN & ONE CENTERED ON INSULATOR. DIMENSIONS ARE IN INCHES. THIS DOCUMENT CONTAINS CONFIDENTIAL AND 6. SEE NOTICH FOR PROPER ORIENTATION.
7. PINS CAN BE ORIENTED IN ANY DIRECTION; BOTH ROWS MUST FACE SAME WAY.
8. MAXIMUM PIN HEIGHT VARIATION: .003[0.08] FROM PIN TO PIN AND ROW TO ROW, MUST BE MEASURED BETWEEN ADJACENT PINS.
9. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION."
10. TUBE PARTS WITH NOTCH AND/OR LOCKING TAB TOWARD ARROW. NOTCH NOT AVAILABLE ON -0.5, -0.7 AND -0.8 POSITION PARTS.
11. TUBES ARE STANDAPD PACE AGING. SEE NOTCH FOR PROPER ORIENTATION. PROPRIETARY INFORMATION AND ALL DESIGN, TOLERANCES ARE: MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC DECIMALS **ANGLES** INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE .XX: ±.01[0.3] .XXX: ±.005[0.13] OR PART. TO ANY UNAUTHORIZED PERSON OR ENTITY NOR 520 PARK EAST BLVD, NEW ALBANY, IN 47150 REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY PHONE: 812-944-6733 FAX: 812-948-5047 OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS .XXXX: ±.0020[0.051] e-Mail: info@SAMTEC.com WRITTEN CONSENT OF SAMTEC, INC MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2.5:1 11. TUBES ARE STANDARD PACKAGING. INSULATOR: .050 [1.27] x .050 [1.27] LOCKING SOCKET ASSEMBLY 12. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY VECTRA E130i, LCP UL 94 VO STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM.

13. ATTACH LABEL -4X2 TO EACH REEL. COLOR: BLACK SFML-1XX-XX-XXX-D-XXX-X-XX

CONTACT: BeCu

PHOS BRON7E


BY: BRATCHER 4/19/99


SHEET 1 OF 4

F:\DWG\MISC\MKTG\SFML-1XX-XXX-D-XXX-X-XX-MKT.SLDDRW

INDICATOR SIDE OF TRAY.

14. LOAD VISION TRAYS WITH PIN #1 OPPOSITE STANDARD - AWAY FROM THE TERMINAL

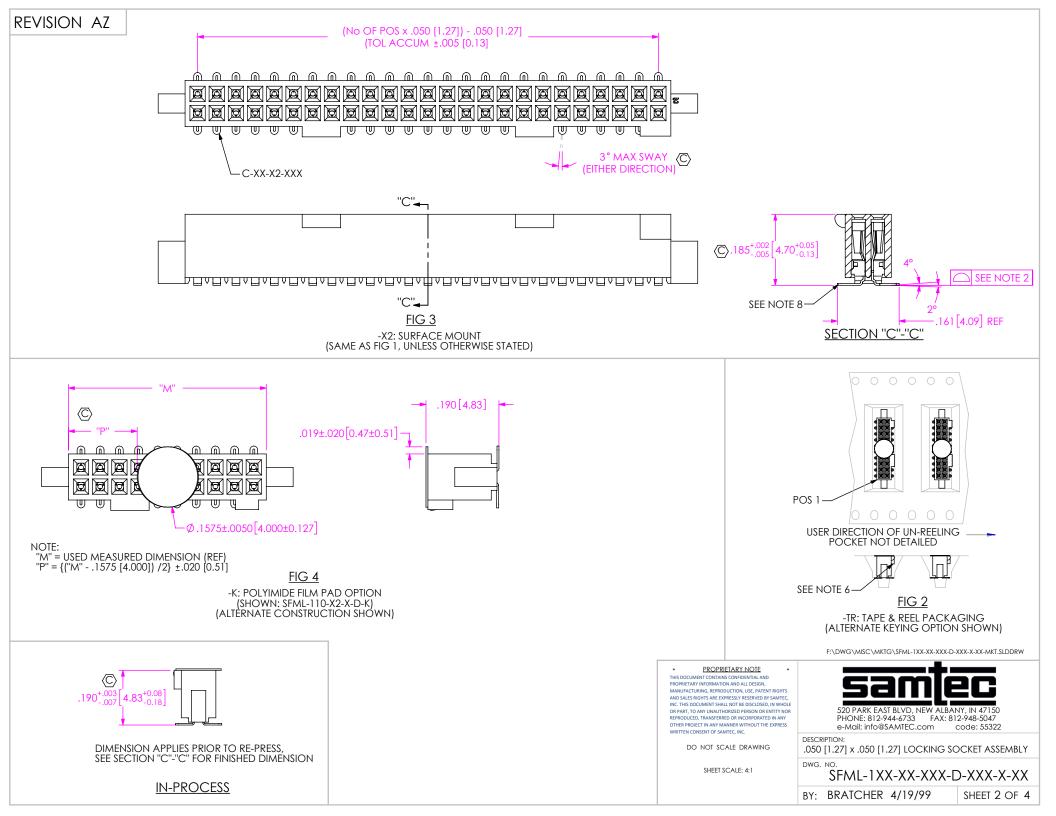

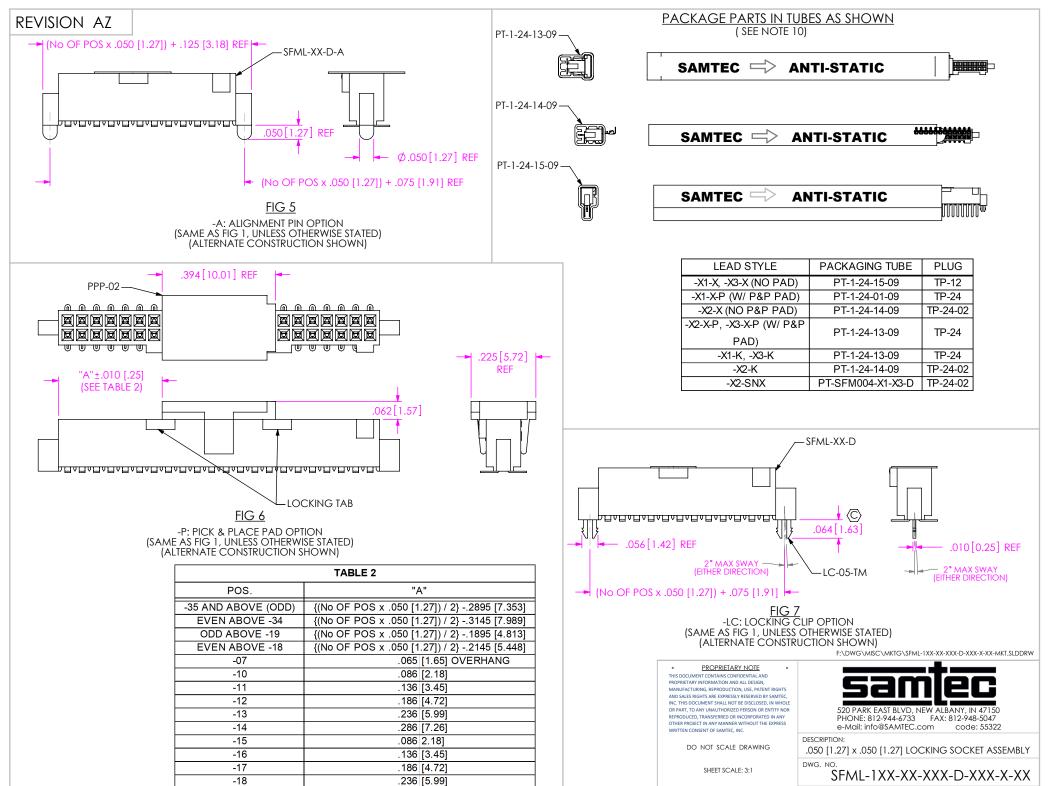


BY: BRATCHER 4/19/99

SHEET 3 OF 4

-19


.286 [7.26]

REVISION AZ

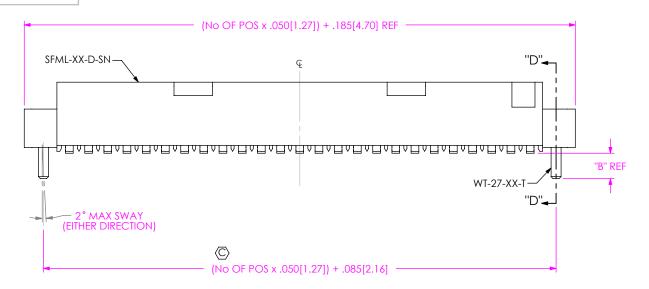



-SNX: SOLDER NAIL OPTION (SHOWN: SFML-125-02-XXX-D-SN (SAME AS FIG 1, UNLESS OTHERWISE STATED) (ONLY AVAILABLE ON -X2 LEAD STYLES)

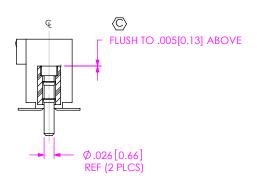

SECTION "D"-"D"

| TABLE 3 | |
|---------|------------|
| OPTION | "B" |
| -SN | .066[1.68] |
| SN2 | .101[1.80] |

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, U.S., PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTE, CH. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATE IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTE, IN

DO NOT SCALE DRAWING

SHEET SCALE: 4:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:

.050 [1.27] x .050 [1.27] LOCKING SOCKET ASSEMBLY

DWG NO

SFML-1XX-XX-XXX-D-XXX-X-XX

BY: BRATCHER 4/19/99

SHEET 4 OF 4