

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15., GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	Part No./Ordering No. 23144132M5701H(R)
		Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
D1	Update approvals: Plug: VDE + KEMA Cable: VDE + IEMMEQU Connector: ENEC-05	bsiep	01/20/2022	QA
D	UPDATE TO SF FORMAT, REVISE PLUG FRONT VIEW IEC320/C15	QA	08/02/2021	QA
C	REMOVE 'SEV' FROM PLUG, REVISE 'N' TO 'D' INEV.B DESCRIPTION, MK RFS. 27396, BS	QA	07/16/2019	QA
B	REMOVE 'D' FROM PLUG, REMOVE 'N', 'S', 'D', 'FI.', KEMA,CEBEC, OVE FROM CABLE, ADD SEV, KEMA, IMQ TO CABLE, REMOVE 'N','S', 'D', 'FI.',KEMA,CEBEC, OVE FROM CONNECTOR, RFS. 27364, BS	QA	06/04/2019	QA
A	INITIAL RELEASE, RFS.26651, SV	QA	02/10/2017	QA

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
 ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>
 Prop 65 Statement:<https://en.globtek.com/prop-65-statement.pdf>

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

RELEASED
 By fisxs at 11:33 am, Jan 24, 2022

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15;, GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 23144132M5701H(R)	Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Date:

Authorized Representative Name:

Authorized Representative Signature:

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek terms and conditions, which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15, GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	
Part No./Ordering No. 23144132M5701H(R)		Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE


Cordset Information:
CordsetColor:GlobTek Black
Cord Length (mm):2500±50

NOTES:


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15;, GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	
Part No./Ordering No. 23144132M5701H(R)		Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

END A

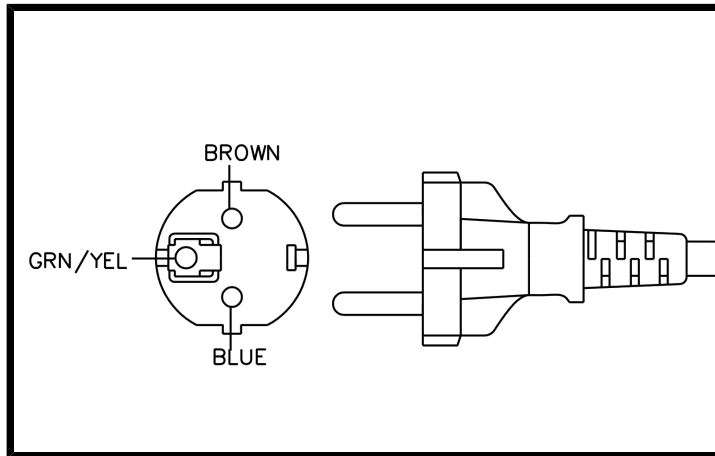


END B

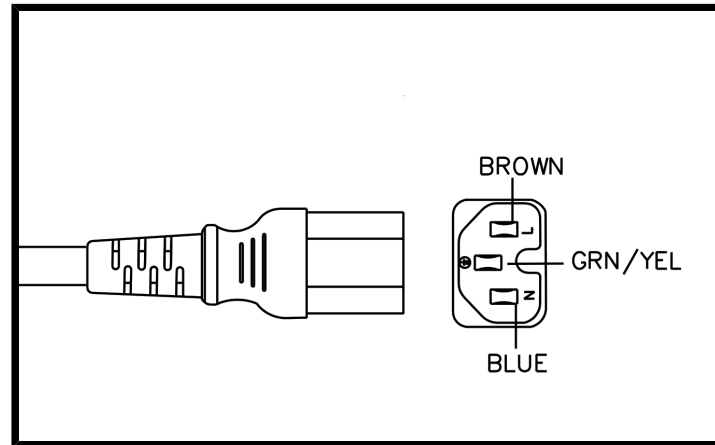

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15, GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	Part No./Ordering No. 23144132M5701H(R)
		Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

CABLE IMAGE

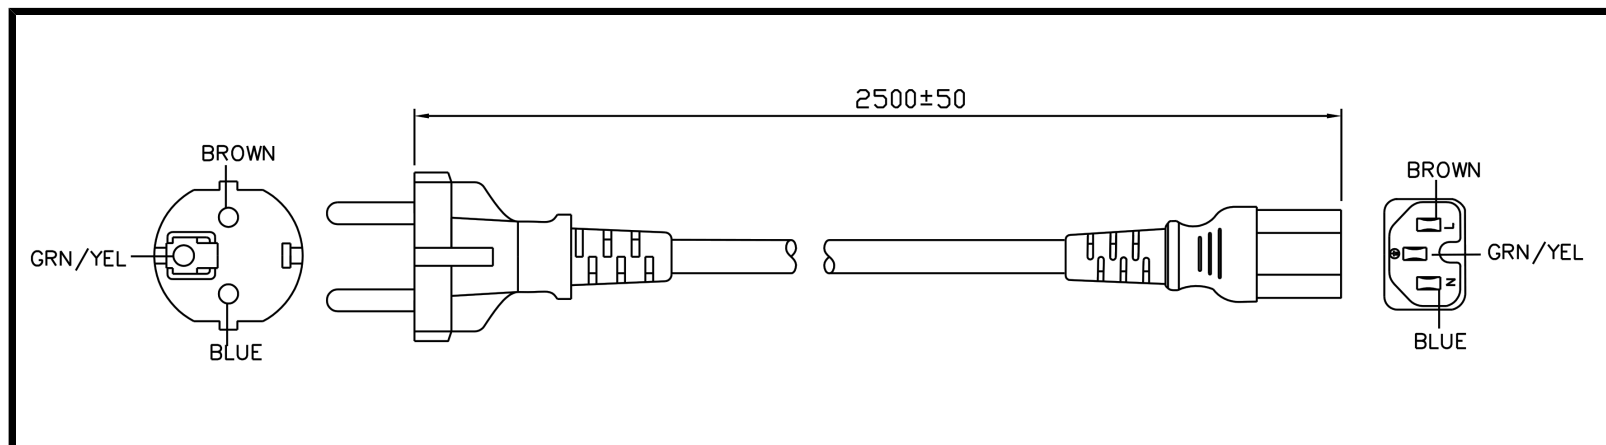

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15., GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	
Part No./Ordering No. 23144132M5701H(R)		Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

End A Code:2314-PATNG Description:European Plug CEE 7/7 Rating (V):250 Rating (A):10,0 Gender:Male Overmolded:Yes	Cable Code:4413 Description:GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: Color:GlobTek Black Wire Gauge(AWG):1.0 mm ² Cond:3 Type:H05RN-F Temperature:75° C Amps:10 Volts:300 OD:7.1±0.2 ConductorsColors:BLU/BRN/GRN-YL	End B Code:701H-PATNG Description:IEC320-C15; Rating (V):250 Rating (A):10,0 Gender:Male Overmolded:Yes
---	---	---

Overall cable rating:10A / 250VAC

Plug Approvals



VDE

Cable Approvals

IEMMEQU



IEMMEQU (Italy)

VDE (Cable)

Connector Approvals



ENEC-05 (All Euro)



KEMA (Keuring van Elektrotechnische
Materialen te Arnhem) /Dekra (Netherlands
Certification)

AGENCY ONLINE DOCUMENTS

<http://en.globtek.com/cordsets/>

RoHS/RoHS3 Declaration

https://www.globtek.com/pdf/rohs_cert/01t30000002p84wAAA

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15;, GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 23144132M5701H(R)	Rev D1


CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REACH Declaration https://www.globtek.com/pdf/iso_certificates/REACH.pdf
 Conflict Minerals Declaration <https://www.globtek.com/pdf/conflict-minerals.pdf>
 Prop 65 Statement <https://en.globtek.com/prop-65-statement.pdf>
 CE.UKCA.Cord https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t30000002p84w
 IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: European Plug CEE 7/7 to IEC320-C15;, GT Cable #4413: 1.0 mm ² / 3 Conductors, 7.1±0.2mm OD, H05RN-F, 75 Deg.C, 300V, BLU/BRN/GRN-YL, Approvals: ,2500±50mm, GlobTek Black	
	Model No. Power Cord	Part No./Ordering No. 23144132M5701H(R)
		Rev D1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:231-701H
 Description:200 +/- 20mm
 Image:

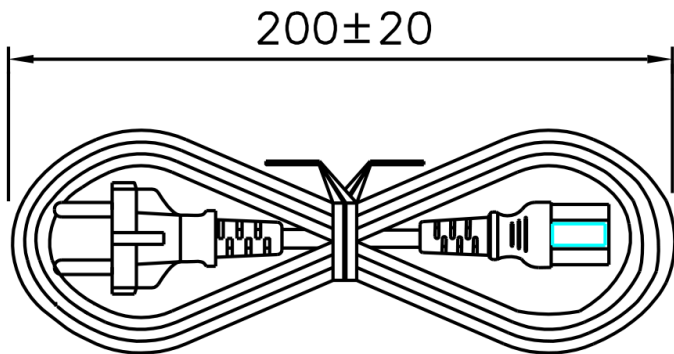

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):