
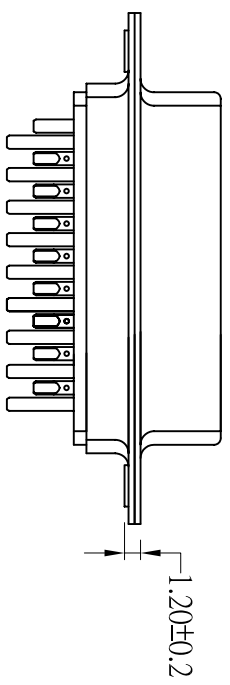
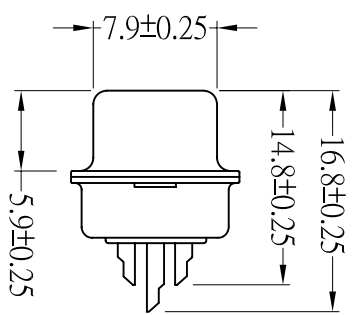


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	REVISIONS	DATE	APPROVED
A	NEW RELEASE		22/Jun/2021	
A1	Show all the actual pin locations		10/Feb/2023	

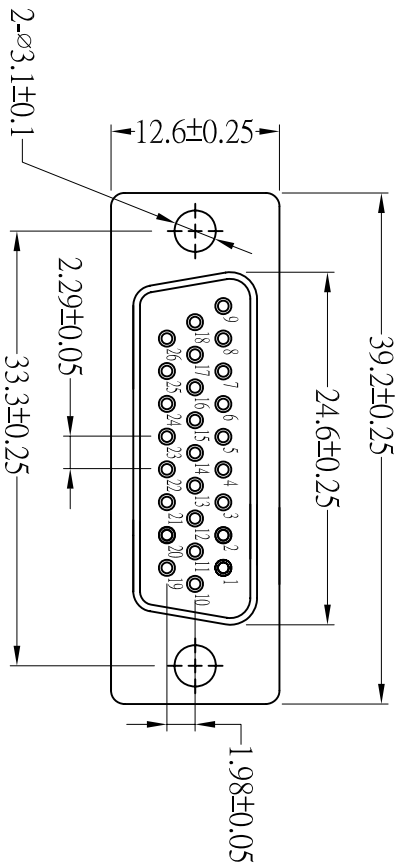

Note:

1. Material:
 - 1.1 High temperature thermoplastic PBT with 30%GF, UL94V-0
 - 1.2 Contact: Copper Alloy, thickness=0.2mm, Gold flash plated on contact area over Nickel
 - 1.3 Front Shell: Steel, thickness=0.4mm, Nickel Plated
 - Back Shell: Steel, thickness=0.4mm, Tin Plated over Nickel
2. Specification:
 - 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 1000 MΩ Min.
 - 2.5 Total mating force: 7.0 Kgf Max.
 - 2.6 Total unmating force: 1.5 Kgf Min.
 - 2.7 Temperature range: -55°C~85°C
 - 2.8. Mating Cycle: 500 cycles min
3. ROHS(Directive 2011/65/EU Consolidated version of 24 June 2015)Compliant



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.	
DECIMALS	±.X	DRAWN	DATE
.XX	±.XX	LF	22/Jun/2021
.XXX	±.XXX	CHECKED	BA
		22/Jun/2021	

THIRD ANGLE PROJECTION		RES P/ENG		SIZE DWG NO.	
		MEG ENG		A	P/N: CN-DSUBHD26SK-000
				REV.	A1

NOTES: UNLESS OTHERWISE SPECIFIED

Amphenol Cables on Demand
20 VALLEY ST., ENIDCOTT, NY 13760

D-Sub Connector (Solder-Cup)
Connector Type: HD26 Female