

SPECIFICATION:

Operating Voltage (Max.): 250 V
 Operating Current (Nom.): 7 A
 Operating Temperature: -25°C to 85°C
 Insulation Resistance (Min.): 1000 MΩ
 Contact Resistance (Max.): 10 mΩ
 Dielectric Strength: 1,500 Vac

MATERIAL:



Material (Terminal): brass, tin plated
 Material (Housing): nylon 66
 Flammability Class: UL 94 V-0
 Material (Contact Area): brass, tin plated

HANDLING:

Packaging: bulk

TOLERANCE:

.X: ± 0.35
 .XX: ± 0.25

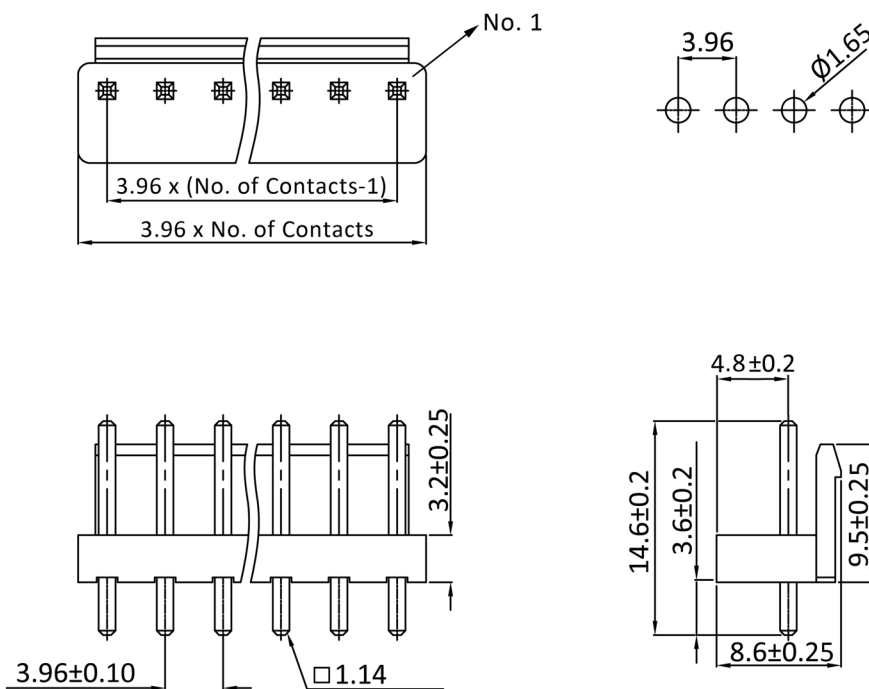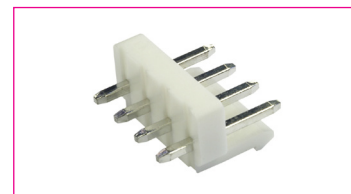

Order Information

Identifier: CSV	No. of Contacts: #	Version: G	Pitch: 3
Wafer series CVG pitch 3.96 mm single row	2: 1 x 2 3: 1 x 3 4: 1 x 4 : 15: 1 x 15	straight	pitch 3.96 mm