

BC327/BC328 TRANSISTOR(PNP)

FEATURE

- Power dissipation



Package TO-92

MAXIMUM RATINGS* ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	UNIT
Collector-Base Voltage	BC327	-50	V
	BC328	-30	
Collector-Emitter Voltage	BC327	-45	V
	BC328	-25	
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current - Continuous	I_C	-800	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Junction and Storage Temperature	T_{stg}	-55~+150	$^{\circ}\text{C}$

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$ unless otherwise specified)









Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V_{CBO}	$I_C=-100\mu\text{A}, I_E=0$	BC327	-50		V
			BC328	-30		
Collector-emitter breakdown voltage	V_{CEO}	$I_C=-10\text{mA}, I_B=0$	BC327	-45		V
			BC328	-25		
Emitter-base breakdown voltage	V_{EBO}	$I_E=-10\mu\text{A}, I_C=0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB}=-45\text{V}, I_E=0$ $V_{CB}=-25\text{V}, I_E=0$	BC327		-0.1	μA
			BC328		-0.1	
Collector cut-off current	I_{CEO}	$V_{CE}=-40\text{V}, I_B=0$ $V_{CE}=-20\text{V}, I_B=0$	BC327		-0.2	μA
			BC328		-0.2	
Emitter cut-off current	I_{EBO}	$V_{EB}=-4\text{V}, I_C=0$			-0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE}=-1\text{V}, I_C=-100\text{mA}$	100		630	
	$h_{FE(2)}$	$V_{CE}=-1\text{V}, I_C=-300\text{mA}$	40			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-500\text{mA}, I_B=-50\text{mA}$			-0.7	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=-500\text{mA}, I_B=-50\text{mA}$			-1.2	V
Base-emitter voltage	V_{BE}	$V_{CE}=-1\text{V}, I_C=-300\text{mA}$			-1.2	V
Transition frequency	f_T	$V_{CE}=-5\text{V}, I_C=-10\text{mA}, f=100\text{MHz}$	260			MHz
Collector output capacitance	C_{OB}	$V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$			12	pF

CLASSIFICATION OF h_{FE}

Rank	16	25	40
Range	100-250	160-400	250-630



All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

TYPICAL CHARACTERISTICS

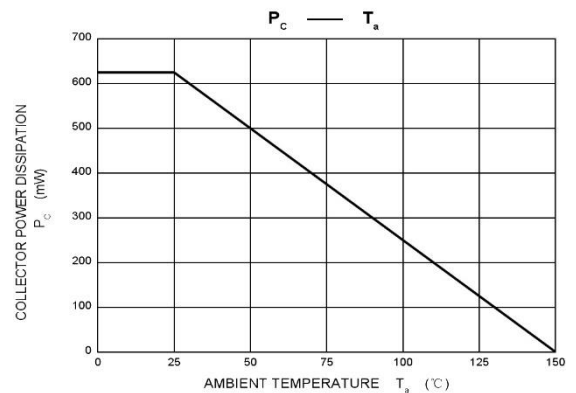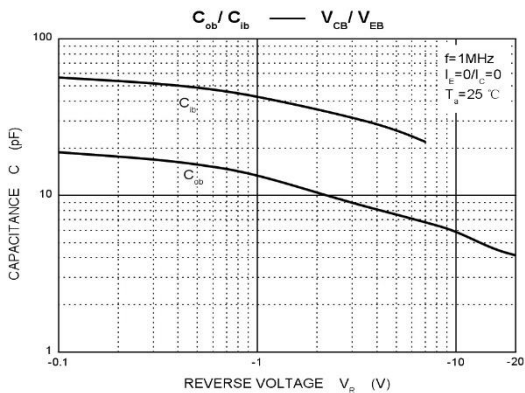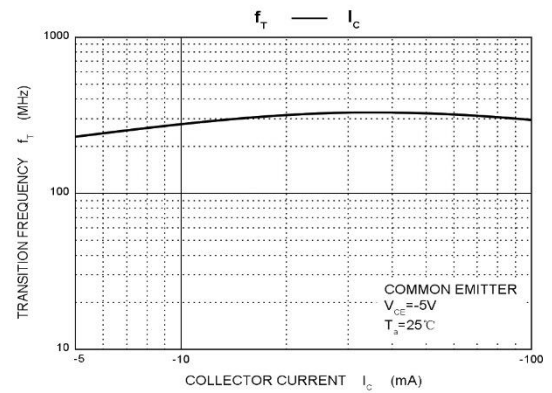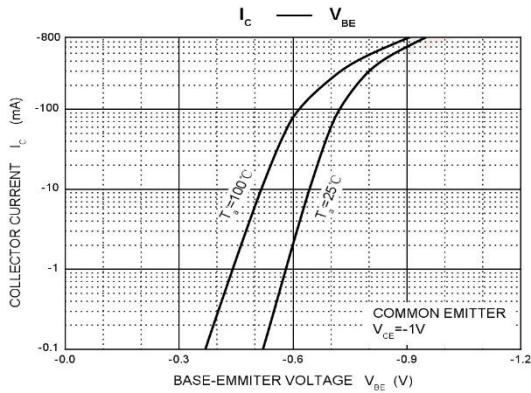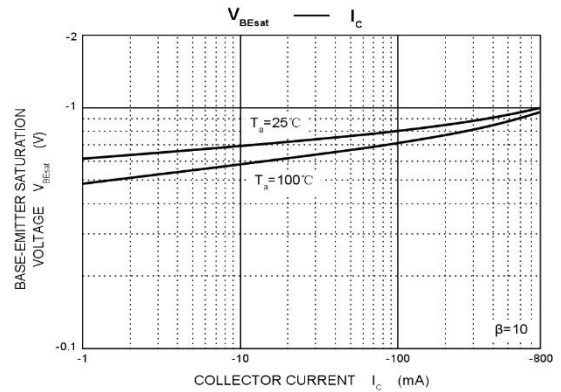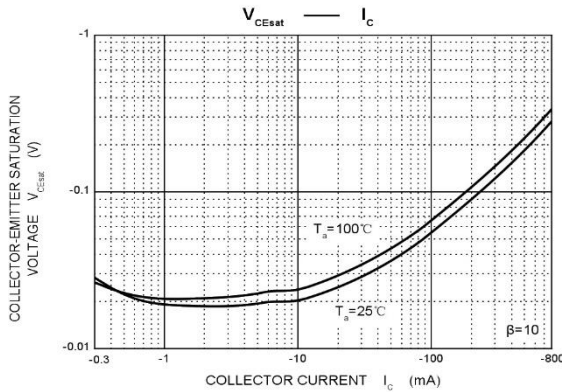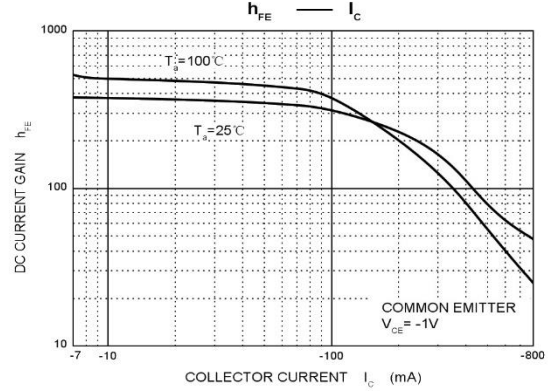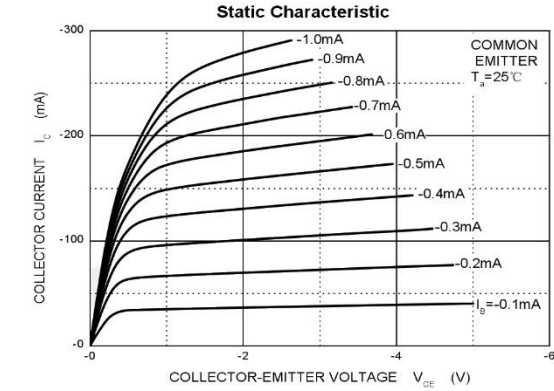


All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

TO-92 Package Outline Dimensions

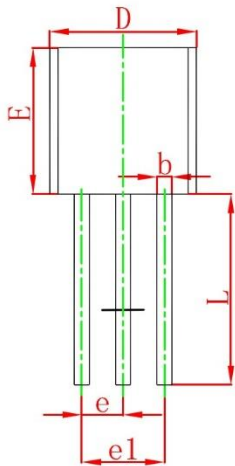

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015


TO-92 Suggested Pad Layout

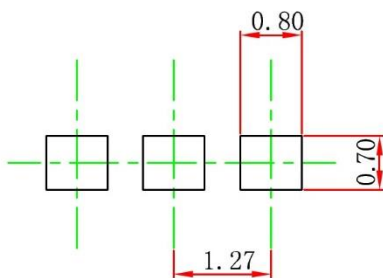

- Note:
1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05mm.
 3. The pad layout is for reference purposes only.


TO-92 Tape and Reel

TO-92 PACKAGE TAPEING DIMENSION

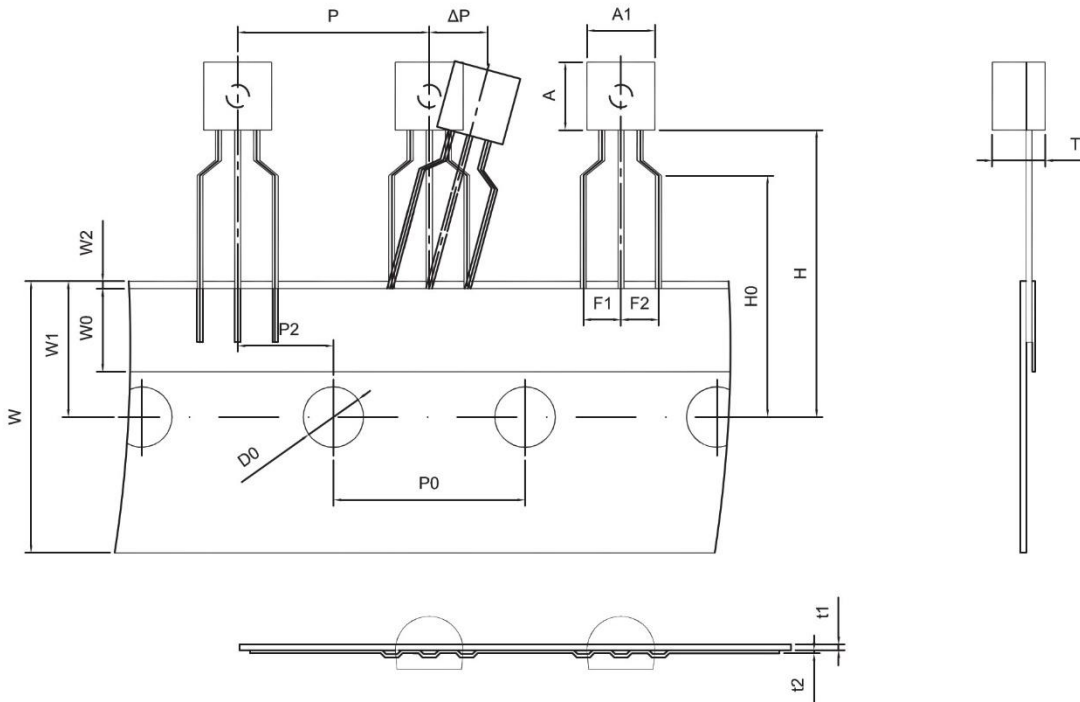

Dimensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

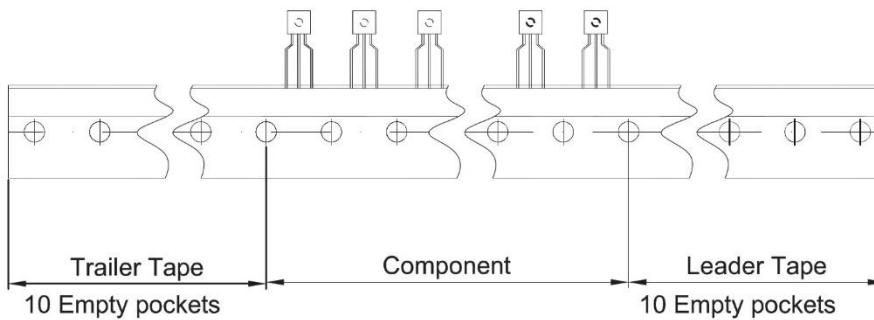

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.