
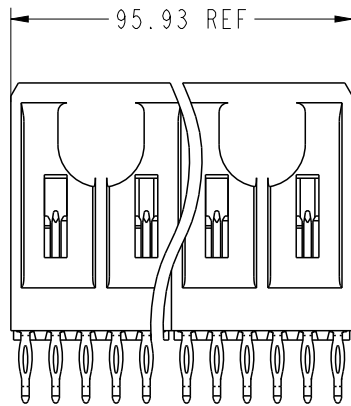
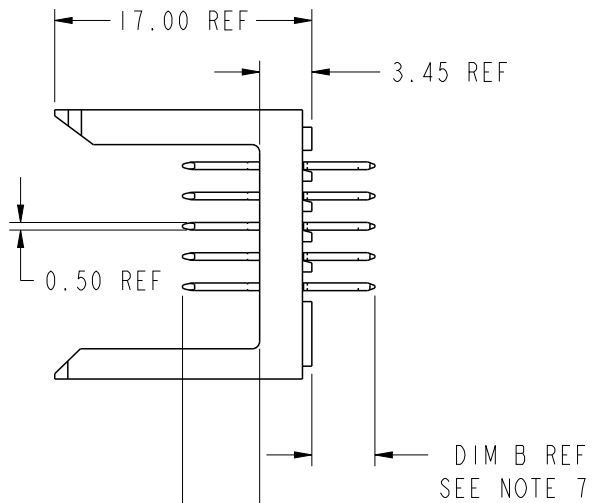


PRODUCT NUMBER
89009-XYX(L)LF

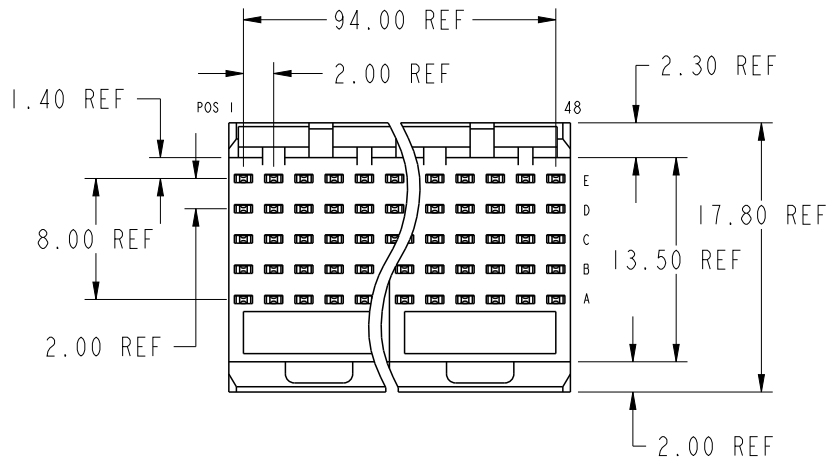


PART NUMBER : 89009-XYX(L)LF

L REFER LUBRICATED (OPTIONAL) △
SEE NOTE 3

X REFER PLATING PERFORMANCE △
SEE NOTE 3

| | | | | | | | | | | |
|---------------|---------------------------------------|------|----------------|------------|------------------------|------------------------|-----------|---------------|---------------|-------|
| spec ref | * | dr | Terran Huang | 2010/07/09 | projection | MM | size | A4 | scale | 1:10 |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Rahul Mohan-M | 2021/07/21 | | ←→ | ecn no | ELX-I-41741-1 | | |
| surface | 3.200 | chr | - | - | | | rel level | Released | | |
| ASME Y14.5 | linear | appr | Kuriakose, San | 2021/08/16 | product family | METRAL | | | rev | W |
| | angular | | | | title | METRAL SIGNAL HEADER | | | dwg no | 89009 |
| | 0° | | | | 8 MOD, 5 ROW PRESS-FIT | Product - Customer Drw | | | sheet 1 of 25 | |
| | ±0.3 | | | | amphenol-icc.com | Product - Customer Drw | | | sheet 1 of 25 | |
| | ±0.13 | | | | | Product - Customer Drw | | | sheet 1 of 25 | |
| | ±0.051 | | | | | Product - Customer Drw | | | sheet 1 of 25 | |
| | ±2° | | | | | Product - Customer Drw | | | sheet 1 of 25 | |

Creo F114-ELX-NC-AAC, REV F, 2020-12-21

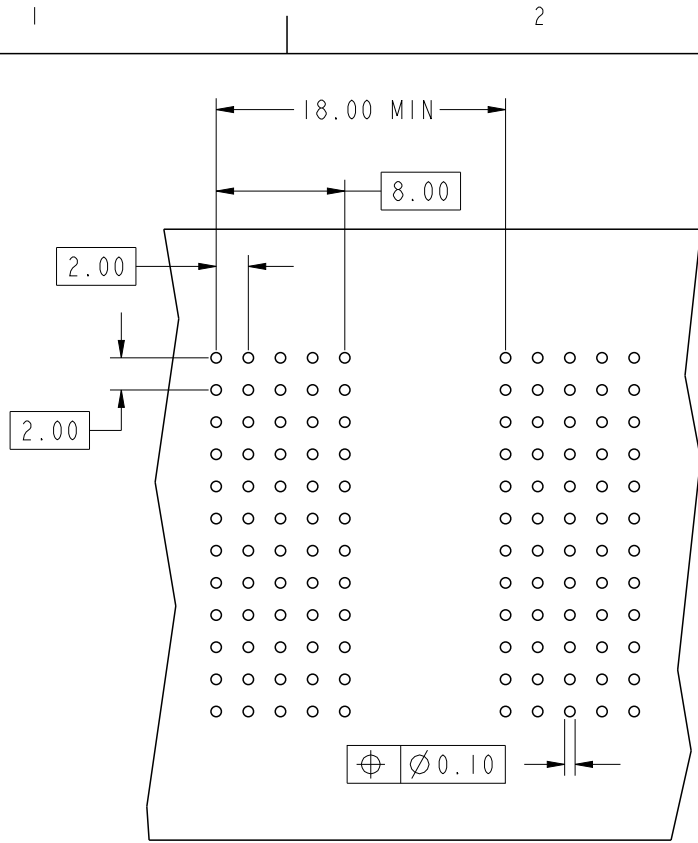

| KEY | | |
|------|--------------|--------------|
| CODE | DIMENSIONS | |
| | DIM "A" MATE | DIM "B" TAIL |
| 1 | 5.00 | 4.30 |
| 2 | 5.75 | 4.30 |
| 3 | 6.50 | 4.30 |
| 4 | 7.25 | 4.30 |
| 5 | 5.00 | 13.60 |
| 6 | 5.75 | 13.60 |
| 7 | 6.50 | 13.60 |
| 8 | 7.25 | 13.60 |
| 9 | 5.00 | 17.00 |
| 10 | 5.75 | 17.00 |
| 11 | 6.50 | 17.00 |
| 12 | 7.25 | 17.00 |
| 13 | 8.25 | 4.30 |
| 14 | 8.25 | 13.60 |
| 15 | 8.25 | 17.00 |
| 16 | 7.00 | 4.30 |
| 17 | 7.00 | 13.60 |
| 18 | 7.00 | 17.00 |
| 19 | 8.00 | 4.30 |
| 20 | 8.00 | 13.60 |
| 21 | 8.00 | 17.00 |

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

| | | | | | | | | | | | | | |
|---------------|---------------------------------------|------|----------------|-----------------|----------------|----------------------|--------|---------------|----------|-------|------------------------|--|---------------|
| spec ref | * | dr | Terran Huang | 2010/07/09 | projection | MM | size | A4 | scale | 21:10 | | | |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Rahul Mohan-M | 2021/07/21 | | | ecn no | ELX-I-41741-1 | | | | | |
| | | chr | - | - | | | | rel level | Released | | | | |
| surface | ASME Y14.5 | appr | Kuriakose, San | 2021/08/16 | product family | METRAL | rev | 89009 | W | | | | |
| | linear | 0.X | ±0.3 | Amphenol FCi | title | METRAL SIGNAL HEADER | | dwg no | 89009 | rev | | | |
| | | 0.XX | ±0.13 | | | cat. no. | * | | | | Product - Customer Drw | | sheet 2 of 25 |
| | angular | 0° | ±2° | | | | | | | | amphenol-icc.com | | |

Creo F114-ELX-NC-AAC_REV F_2020-12-21

PRODUCT NUMBER
SEE SHEET 1

NOTES:

1. FOR DIM A AND B SEE SHEET 2 AND UP.
2. MATERIAL : BODY : THERMOPLASTIC UL94-V0.
: CONTACT : COPPER ALLOY.
3. FOR PLATING PERFORMANCE REFER DRAWING # 10159408.
4. ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES.
IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: XXXXX-XXXPLF
5. PRODUCT SPECIFICATION GS-12-180
6. APPLICATION SPECIFICATION BUS-20-073
7. AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
8. THE PRODUCTS MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS
AS DESCRIBED IN GS-47-0004.
9. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR
VAPOR PHASE REFLOW OVEN. THE Au CONTACT SURFACE OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMIM 140°C FOR
NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.
10. A \triangle SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE
CURRENT DRAWING REVISION.

| | | | | | | | | |
|---------------------------------------|---------|----------------------------|--------|-------------------------|----------------------------|--------------|-----------------------------|----------------|
| spec ref * | | dr Terran Huang | | 2010/07/09 | projection | MM | size A4 | scale 11:10 |
| tolerance std | | eng Rahul Mohan-M | | 2021/07/21 | | | ecn no ELX-I-41741-1 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | chr - | | - | | | rel level Released | |
| surface | | appr Kuriakose, San | | 2021/08/16 | product family METRAL | rel level | rev | |
| ASME Y14.5 | linear | 0.X | ±0.3 | Amphenol FCi | title METRAL SIGNAL HEADER | dwg no 89009 | rev W | |
| | | 0.XX | ±0.13 | | | | | |
| | | 0.XXX | ±0.051 | | | | | |
| | angular | 0° | ±2° | amphenol-icc.com | cat. no. | * | Product - Customer Drw | sheet 25 of 25 |