

P | Cabling

Data sheet

UAE 50x8 Cat.3 patch panel

Page 1/6

 P/N
130886-E

EAN 4250184105084


2024/09/27

Version: AA


Illustrations



Dimensional drawing

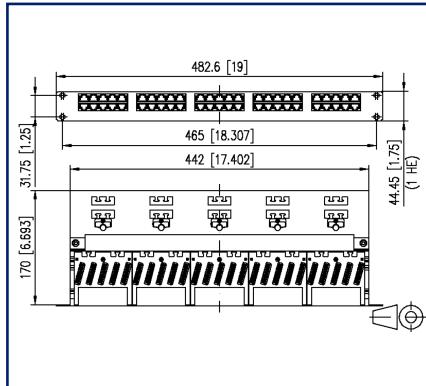

Circuit diagram

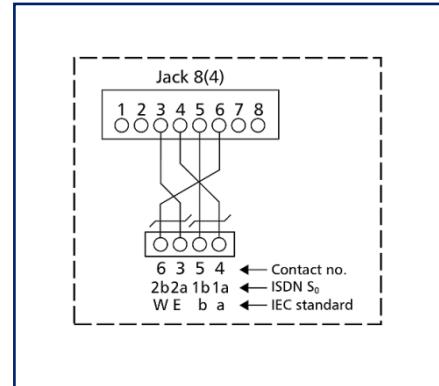

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU Cat.3 patch panel with 50 RJ45 jacks 8(4)
- 19 inch module frame made of silver anodized aluminum
- one to four-pair connection lines connected to LSA-PLUS® insulation displacement connectors (AWG 22-26)
- suitable cable types for 50 x 8(4): 10 x 10 DC, 4 x 50 DC, 2 x 50 DC (DC=double conductor)
- pin assignment to ISO/IEC 11801/EN 50173-1
- wire pairs can be led to the terminal without untwisting the pair
- strain relief by means of cable ties (not included in the delivery) on rear cable support
- cable duct to lay double conductors clearly arranged
- 5 clamping sheets for drain wire, grounding bolt M6



P | Cabling

Data sheet

Page 2/6

UAE 50x8 Cat.3 patch panel

P/N

130886-E

EAN 4250184105084

2024/09/27

Version: AA

Technical Data

General Data

Fields of application	structured building cabling office areas Distributed building services data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E1
Design	patch panel
Mounting style	1RU
Transmission technology	Copper
Color	anodized alu.
Dimensions	
Dimension (L x W x H)	170 mm x 482.6 mm x 44.45 mm
Dimension (L x W x H)	6.693 in. x 19 in. x 1.75 in.
Inches	19 inches
Height unit	1RU
Labeling option	printed numbers

Transmission characteristics

Category (ISO)	3
Category (TIA)	3
PoE	IEEE 802.3af

Connections/interfaces

Connector technology interface 1	LSA terminal block
Connector technology interface 2	RJ45-jack
Number of ports interface 2	50
Number of ports interface 2 equipped	50
Number of positions/contacts interface 1	50 x 4P/4C
Number of positions/contacts interface 2	50 x 8P/4C



P | Cabling

Data sheet

Page 3/6

UAE 50x8 Cat.3 patch panel

P/N

130886-E

EAN 4250184105084

2024/09/27

Version: AA

Technical Data

Connections/interfaces

Termination data, solid wire (min. - max.)

Conductor cross section, solid wire	AWG 26/1 - AWG 22/1
Conductor cross section, solid wire	0.128 mm ² - 0.324 mm ²
Conductor diameter, solid wire (bare copper)	0.409 mm - 0.643 mm
Conductor diameter, solid wire (bare copper)	0.016 in. - 0.025 in.
Core diameter (min. - max.)	
Core diameter (conductor with insulation)	0.7 mm - 1.4 mm
Core diameter (conductor with insulation)	0.028 in. - 0.055 in.
Ground connection	grounding bolt M6x10 with nut and lock washer

Mechanical data

Insertion and withdrawal force	max. 20 N
Life - Number of mating cycles	min. 750
Position/mounting of latch standard installation position	top and bottom
strain relief	yes

Materials and material properties

Material - Module support	Al (Aluminium)
Material - Module support finish	silver anodized
Halogen free	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F



P | Cabling

Data sheet

Page 4/6

UAE 50x8 Cat.3 patch panel

P/N

130886-E

EAN 4250184105084

2024/09/27

Version: AA

Technical Data

Standards/Regulations

Generic cabling systems

General requirements

ISO/IEC 11801-1:2017-11 | DIN EN 50173-1:2018-10
ANSI/TIA-568.2-D

Classifications

ETIM 7.0 EC001128

ETIM 8.0 EC001128

ETIM 9.0 EC001128

Packing details

Type of packaging 1 pc(s) / box

Packaging unit - Weight (gram) 1640 g

Packaging unit - Weight (pound) 3.62 lb

Packaging dimension 520 mm x 180 mm x 46 mm

Packaging dimension 20.472 in. x 7.087 in. x 1.811 in.

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

Weitere Dokumentation siehe / additional documentation see /
documentation supplémentaire voir www.metz-connect.com

P | Cabling

Data sheet

Page 5/6

UAE 50x8 Cat.3 patch panel

P/N

130886-E

EAN 4250184105084

2024/09/27

Version: AA

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
130818-E	Crimp Tool LSA-PLUS®



METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

Weitere Dokumentation siehe / additional documentation see /
documentation supplémentaire voir www.metz-connect.com

P | Cabling

Data sheet

Page 6/6

UAE 50x8 Cat.3 patch panel

P/N

130886-E


EAN 4250184105084

2024/09/27


Version: AA

Illustrations

Dimensional drawing

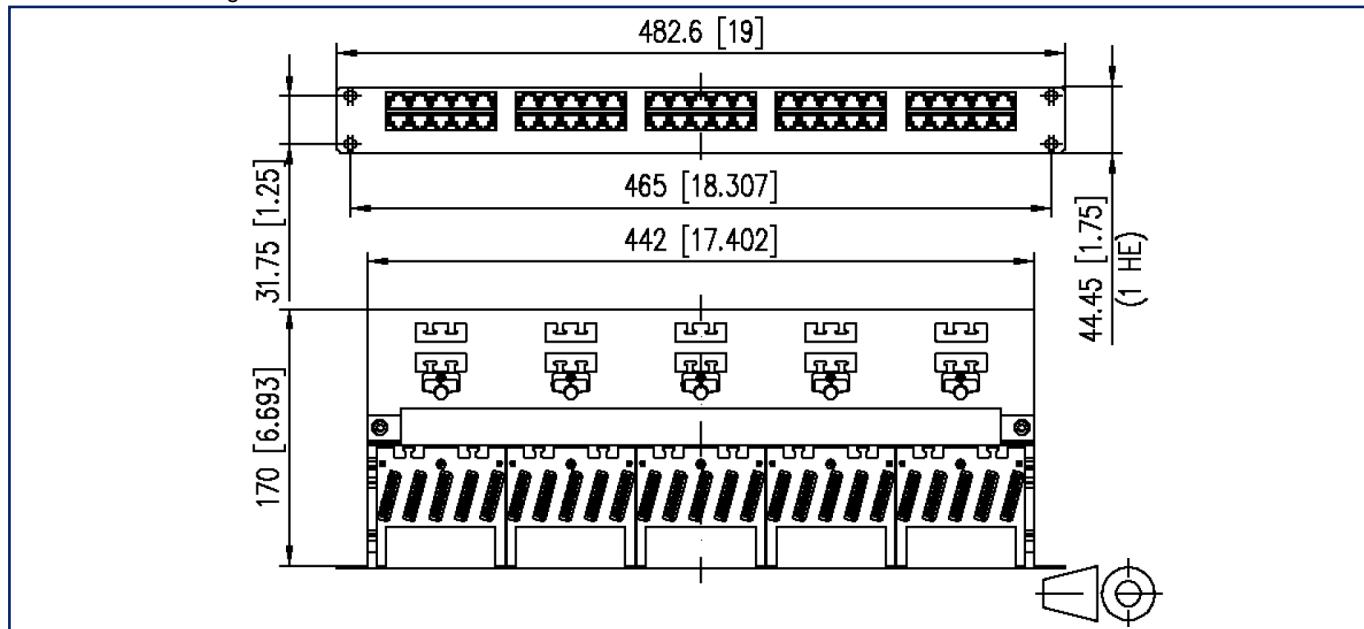

Circuit diagram

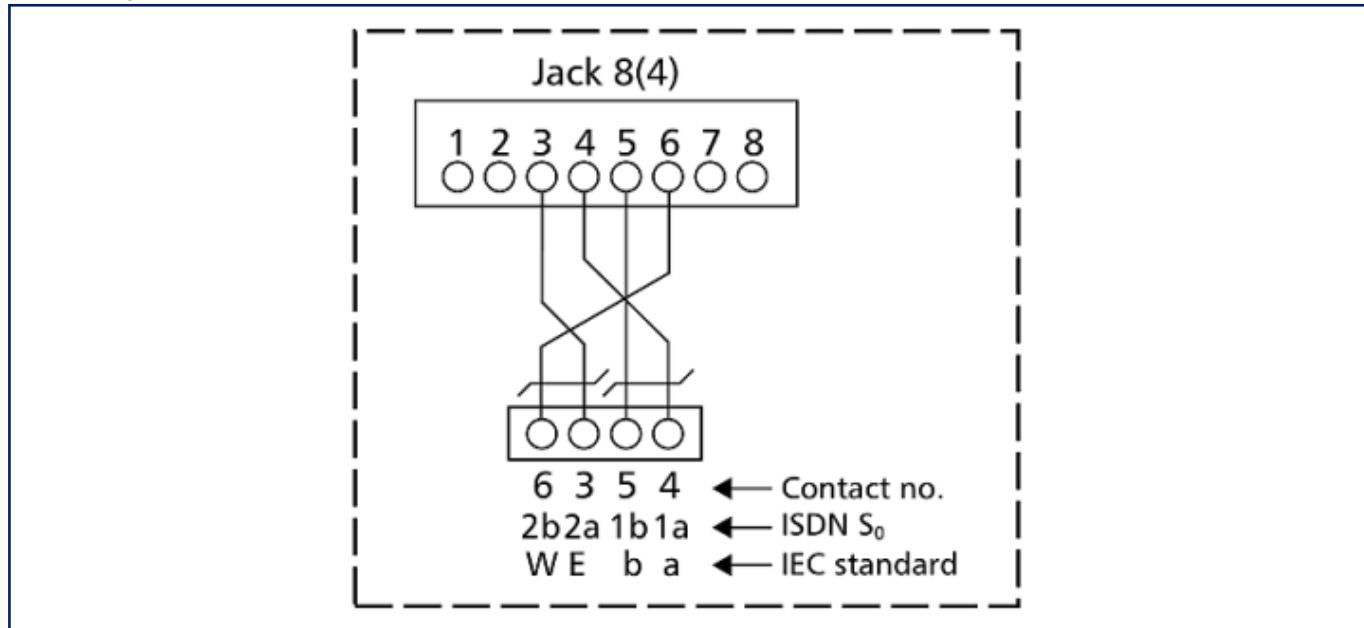

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

Weitere Dokumentation siehe / additional documentation see /

documentation supplémentaire voir www.metz-connect.com