

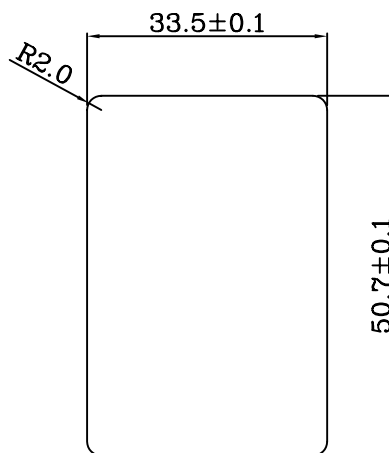
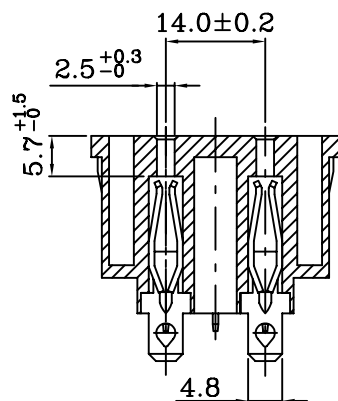
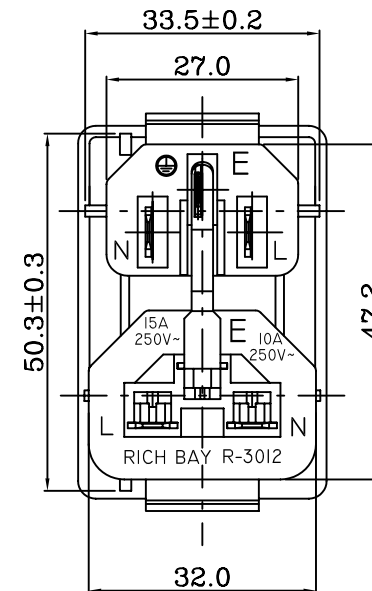


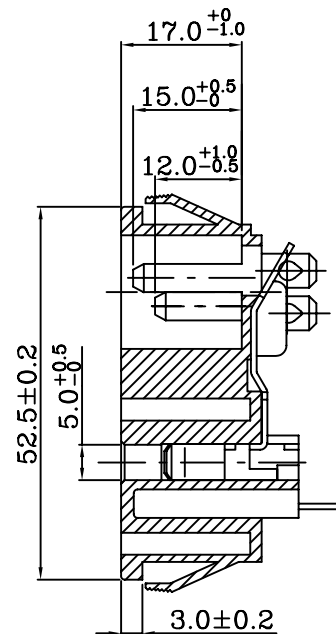

PANEL CUT-OUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100M Ω 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Fiber Thermoplastic . UL 94V-2~0

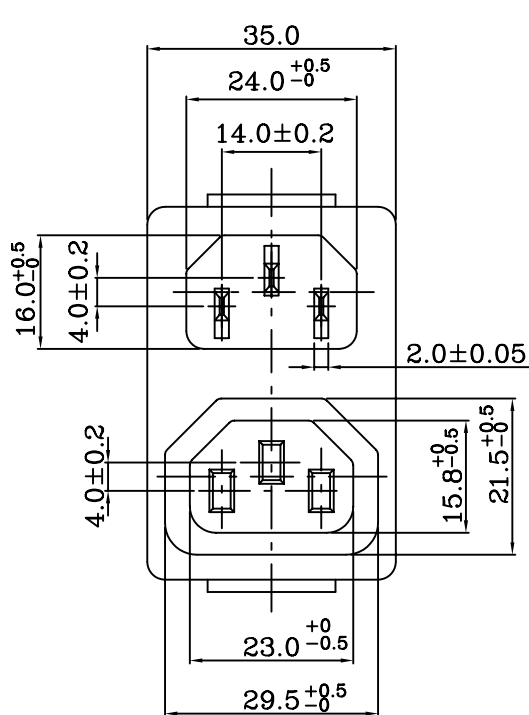


Rating:AC 15A 250V	
Mark	Safety Regulation
	UL
	CUL
Rating:AC 10A 250V	
Mark	Safety Regulation
	CCC


IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用



富灣(佛岡)五金電器有限公司
RICH BAY INT'L LTD.
廣東省清遠市佛岡縣城南工業區
South Town Industrial Area of Fogong County
Qing Yuan City Guangdong Province,China
TEL:0763-4289946 FAX:0763-4288096



DRAWN BY



UNIT Q'TY
1

APPROVED BY



TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO 07071601Q

DESCRIPTION

PRODUCT NO.

INTERIM NO.

NEW NO.

R-3012(B00)

REV

A