

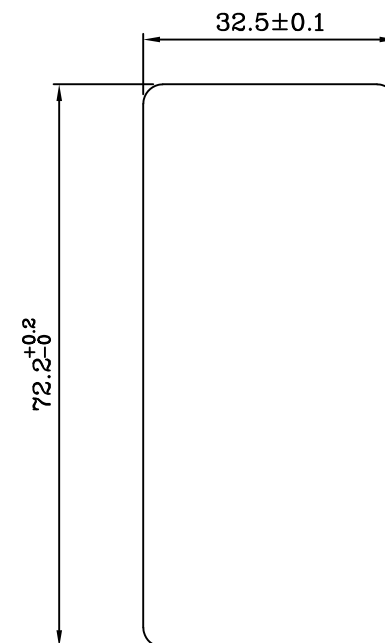
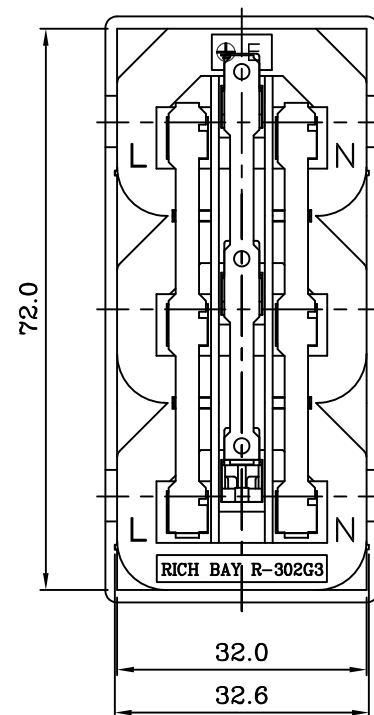
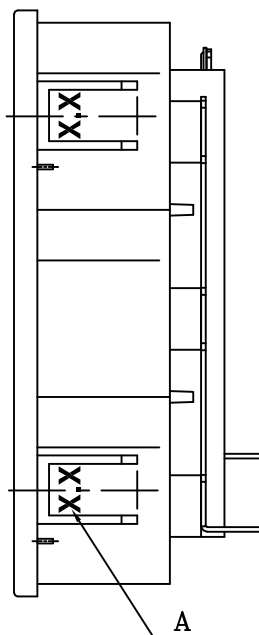


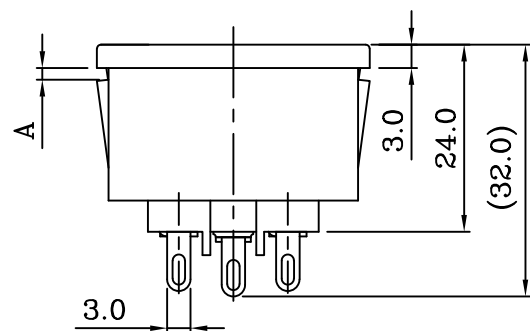

PANEL CUT-OUT

XX	A
10	1.0
12	1.2
15	1.5
17	1.7
20	2.0
25	2.5

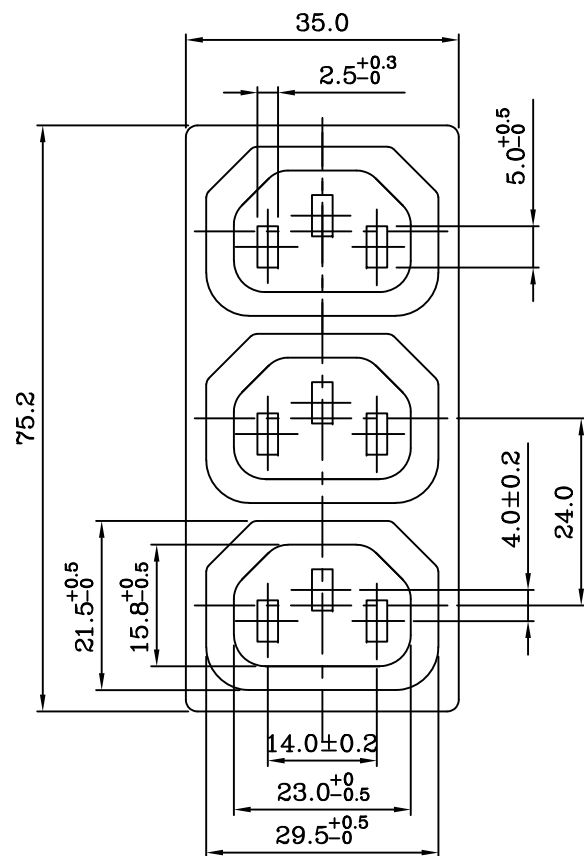


SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. Withdrawing force : 10N~50N.

Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS



富灣股份有限公司
RICH BAY COMPANY LTD.
台北縣樹林市東興街57號
NO. 57, Tung Hsing St.,Shu-Lin Town,
Taipei Hsien, Taiwan, R. O. C.
TEL:886-2-86867781~4 FAX:886-2-86867780
http://www.richbay.com.tw



DRAWN BY



UNIT

mm

UNIT Q'TY

1

SCALE

1:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO

241015A01

DESCRIPTION

PRODUCT NO.

R-302G3 (00) XX

INTERIM NO.

NEW NO.

REV

D