
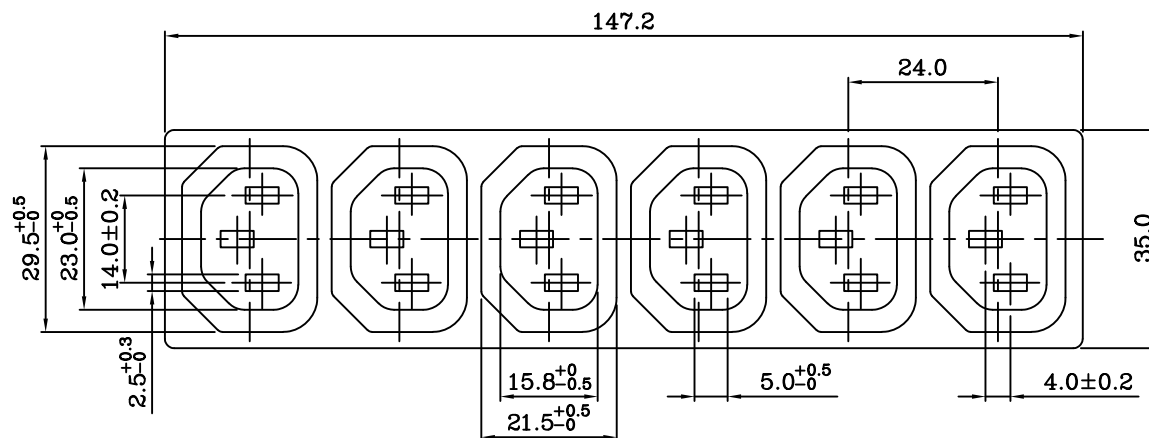
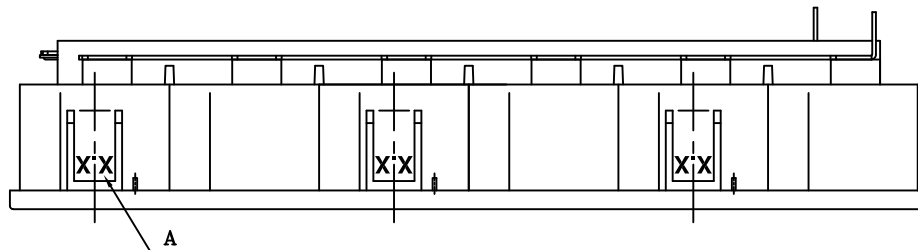
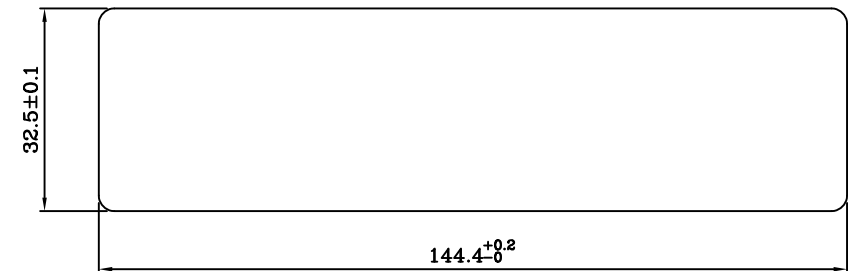


PANEL CUT-OUT

	XX	A
	10	1.0
	12	1.2
	15	1.5
	17	1.7
	20	2.0
	25	2.5

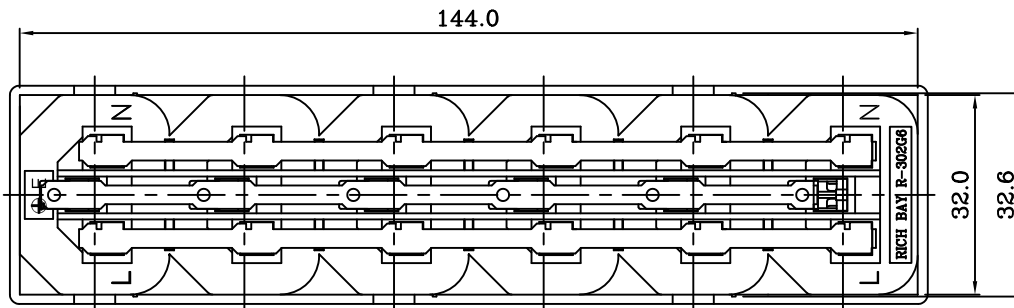


SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. Withdrawing force : 10N~50N.

Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS



富灣股份有限公司
RICH BAY COMPANY LTD.
台北縣樹林市東興街57號
NO. 57, Tung Hsing St., Shu-Lin Town,
Taipei Hsien, Taiwan, R. O. C.
TEL:886-2-86867781~4 FAX:886-2-86867780
http://www.richbay.com.tw



DRAWN BY

UNIT

mm

UNIT Q'TY

1

SCALE

4:5

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.

R-302G6 (00) XX

REV

ID NO

241017A19

INTERIM NO.

NEW NO.

DESCRIPTION



113.10.17

李文彬

APPROVED BY



113.10.17

張育誠

D