
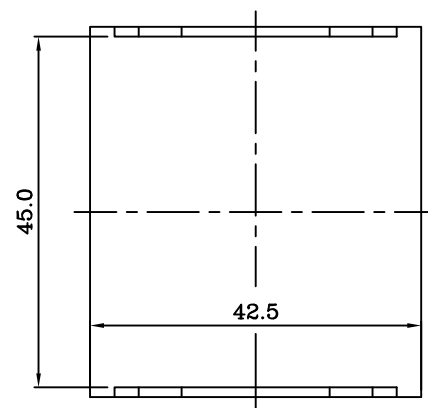
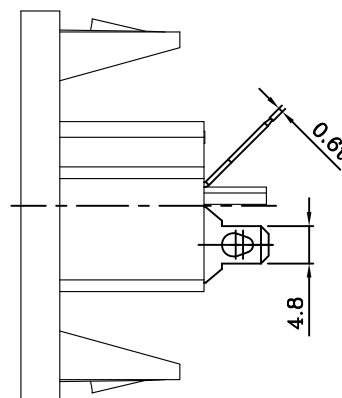
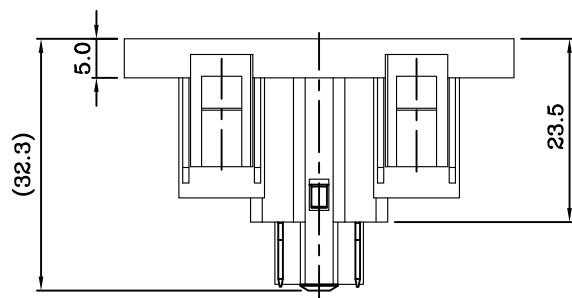
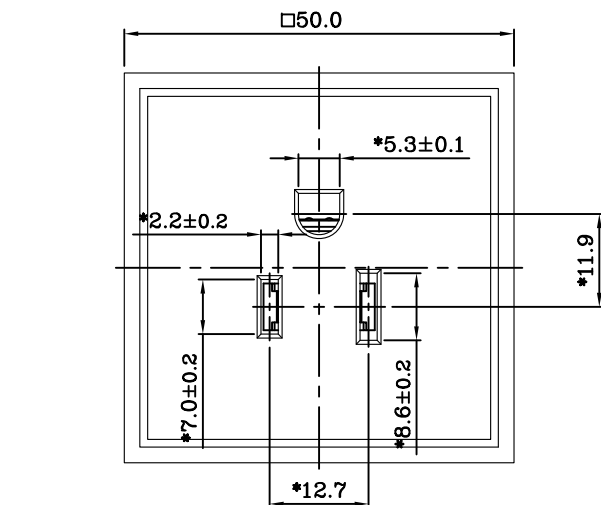


△ PANEL CUT-OUT

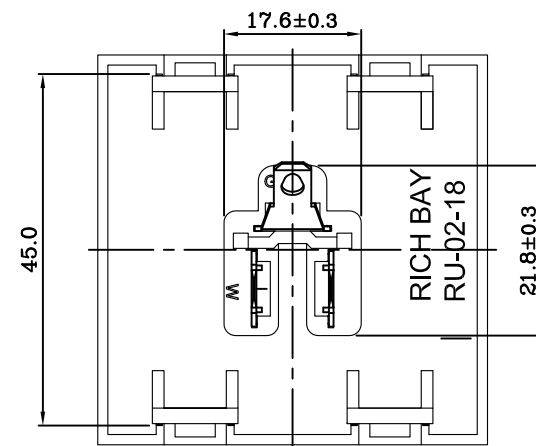


SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.


Rating:AC 15A 125V	
Mark	Safety Regulation
 US	cULus



富湾股份有限公司
RICH BAY COMPANY LTD.
台北市树林市东兴街57号
NO. 57, Tung Hsing St., Shu-Lin Town,
Taipei Hsien, Taiwan, R. O. C.
TEL:886-2-86867781~4 FAX:886-2-86867780
<http://www.richbay.com.tw>




DRAWN BY



UNIT
mm

UNIT QTY
1

APPROVED BY



SCALE
1:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO
DESCRIPTION

220928A03

PRODUCT NO.

RU-02 (18)

INTERIM NO.

NEW NO.

REV

C