


P2: M-005

Customer No.:	No.1
---------------	------

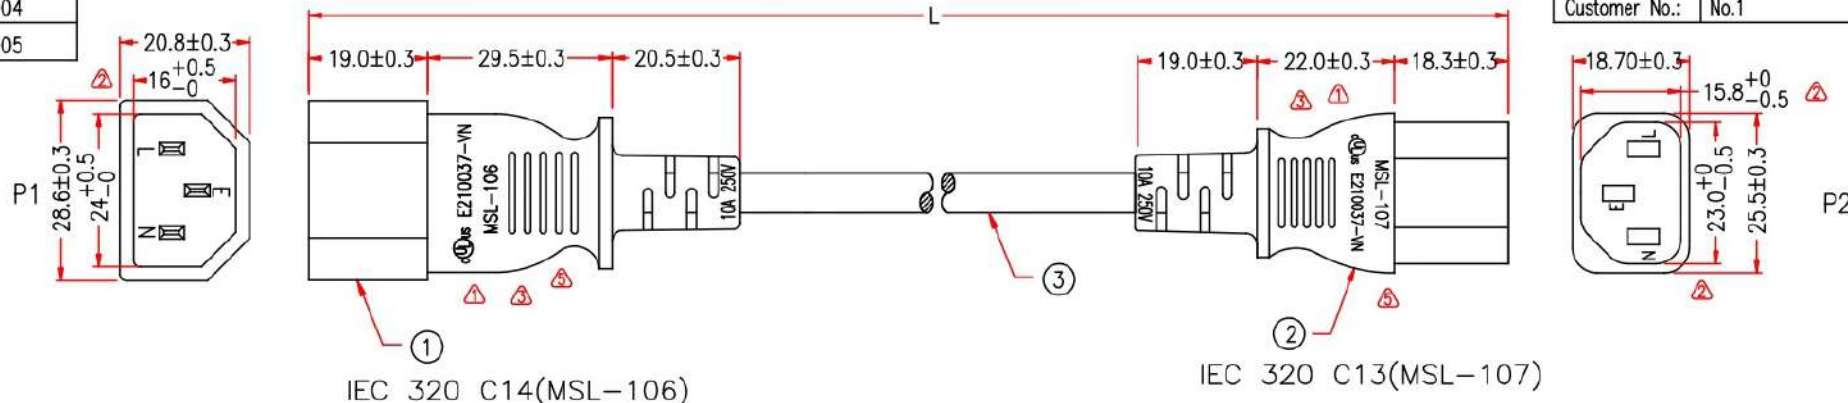

ITEM NO.	LENGTH(L)	LENGTH(X)	JACKET & MOLDED & BSL-106 BRACKET COLOR
	Lmm	Xmm	
AC-0220X			
AC-02201-WH	305mm	265mm	WHITE(W49)
AC-02202-WH	610mm	570mm	WHITE(W49)
AC-02202-RD	610mm	570mm	RED(PANTONE201C)
AC-02202-BU	610mm	570mm	BLUE(PANTONE286C)
AC-02202-GN	610mm	570mm	GREEN(PANTONE376C)
AC-02203-RD	910mm	870mm	RED(PANTONE201C)
AC-02203-BU	910mm	870mm	BLUE(PANTONE286C)
AC-02203-GN	910mm	870mm	GREEN(PANTONE376C)
AC-02204-RD	1220mm	1180mm	RED(PANTONE201C)
AC-02204-BU	1220mm	1180mm	BLUE(PANTONE286C)
AC-02204-GN	1220mm	1180mm	GREEN(PANTONE376C)
AC-02206-RD	1830mm	1790mm	RED(PANTONE201C)
AC-02206-BU	1830mm	1790mm	BLUE(PANTONE286C)
AC-02206-GN	1830mm	1790mm	GREEN(PANTONE376C)
AC-02208-RD	2440mm	2400mm	RED(PANTONE201C)
AC-02208-BU	2440mm	2400mm	BLUE(PANTONE286C)
AC-02208-GN	2440mm	2400mm	GREEN(PANTONE376C)
AC-02210-RD	3050mm	3010mm	RED(PANTONE201C)
AC-02210-BU	3050mm	3010mm	BLUE(PANTONE286C)
AC-02210-GN	3050mm	3010mm	GREEN(PANTONE376C)

 CABLE MARKING:

(UL) SJT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E204978


C(UL) SJT 3/C 0.824MM²(18AWG) FT2 105°C 300V E204978 MSL-VN-

106107B2F18E(FP056-04)

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

BLACK L _____ L
WHITE N _____ N
GREEN E _____ E

PACKING :



⚠ P1,P2: $\odot U_{us}$ E210037-VN ⚠ ⚠

*NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS PROTRUDING LETTERING MOULD

3	UL SJT 18AWG x 3C, OD 7.8mm, JACKET SEE LIST, DRAWING No. EPSVT011803C-142	H5TC20-0304	L-40mm	M304
2	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
	TERMINAL: 2*4mm 98740BS-0/A	A1QB55-0257	3	M257
1	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304		M304
	BRACKET: YS-014, COLOR SEE LIST	A1QC10-0767	1	M767
	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		CompuCableUSA		Cable Length Unless Other Spec. Tolerances: 0 ~200mm 201~1000mm 1001 ~1500mm 1501~2100mm 2100mm↑ ±10mm ±20mm ±25mm ±30mm ±40mm	
CHECKED	HU				
DESIGNER	ZHU				
DRAWING	PLS				
DATE	09/SEP/23	ITEM NO.	 AC-022XX & AC-022XX-XX	UNIT:mm	 