




Clock Oscillator SMD-version

+3.3 V

part no.	12.95205
model	KXO-V96T
frequency	10.0 MHz
frequency stability at -40° ~ +85°C	±25 ppm
operating temperature	-40° ~ +85°C
storage temperature	-50° ~ +125°C
supply voltage range	+1.8 V ~ +3.6 V
supply voltage V _{DD}	+3.3 V DC ±5 %
supply current typ. / max.	2.0 mA / 5.0 mA
symmetry	40 % ~ 60 % at ½ V _{DD} level
rise & fall time max.	5 ns (10 % V _{DD} ~ 90 % V _{DD} level)
"O" level max.	V _{OL} : 10 % V _{DD}
"1" level min.	V _{OH} : 90 % V _{DD}
stand-by control voltage (pin#1)	V _{IH} (min): 70 % V _{DD} V _{IL} (max): 30 % V _{DD} *
output load max.	15 pF HCMOS
Start up time max.	10 ms
disable delay time max.	200 ns
enable delay time max.	10 ms
stand by current max.*	10 µA (Pin #1 = VIL)
jitter max.	deterministic jitter 5 ps norm 1-sigma 7 ps random jitter 7 ps peak to peak 40 ps
contents of reel	1000 pcs.

* Internal crystal oscillation to be halted (pin#1=VIL)


Dimensions (mm):

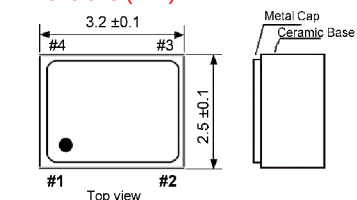


PIN	Connection
1	"L" (0V) "H" or OPEN
2	GND
3	Z OUTPUT
4	V _{DD}

Z: high impedance

Suggested soldering pad:




Test circuit:

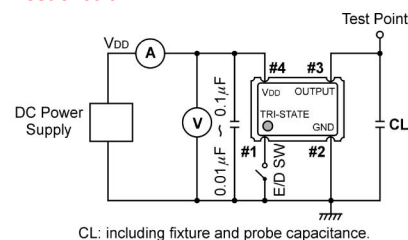


CL: including fixture and probe capacitance.

Output Waveform:

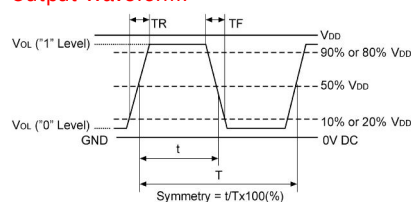

Reflow soldering condition:

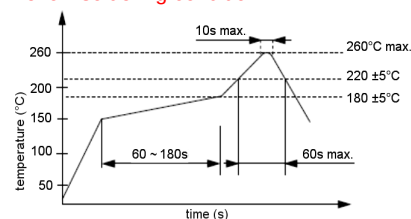

Tape specification:

