P1: M-001	Customer No.:	No.:
P2: M-052A		

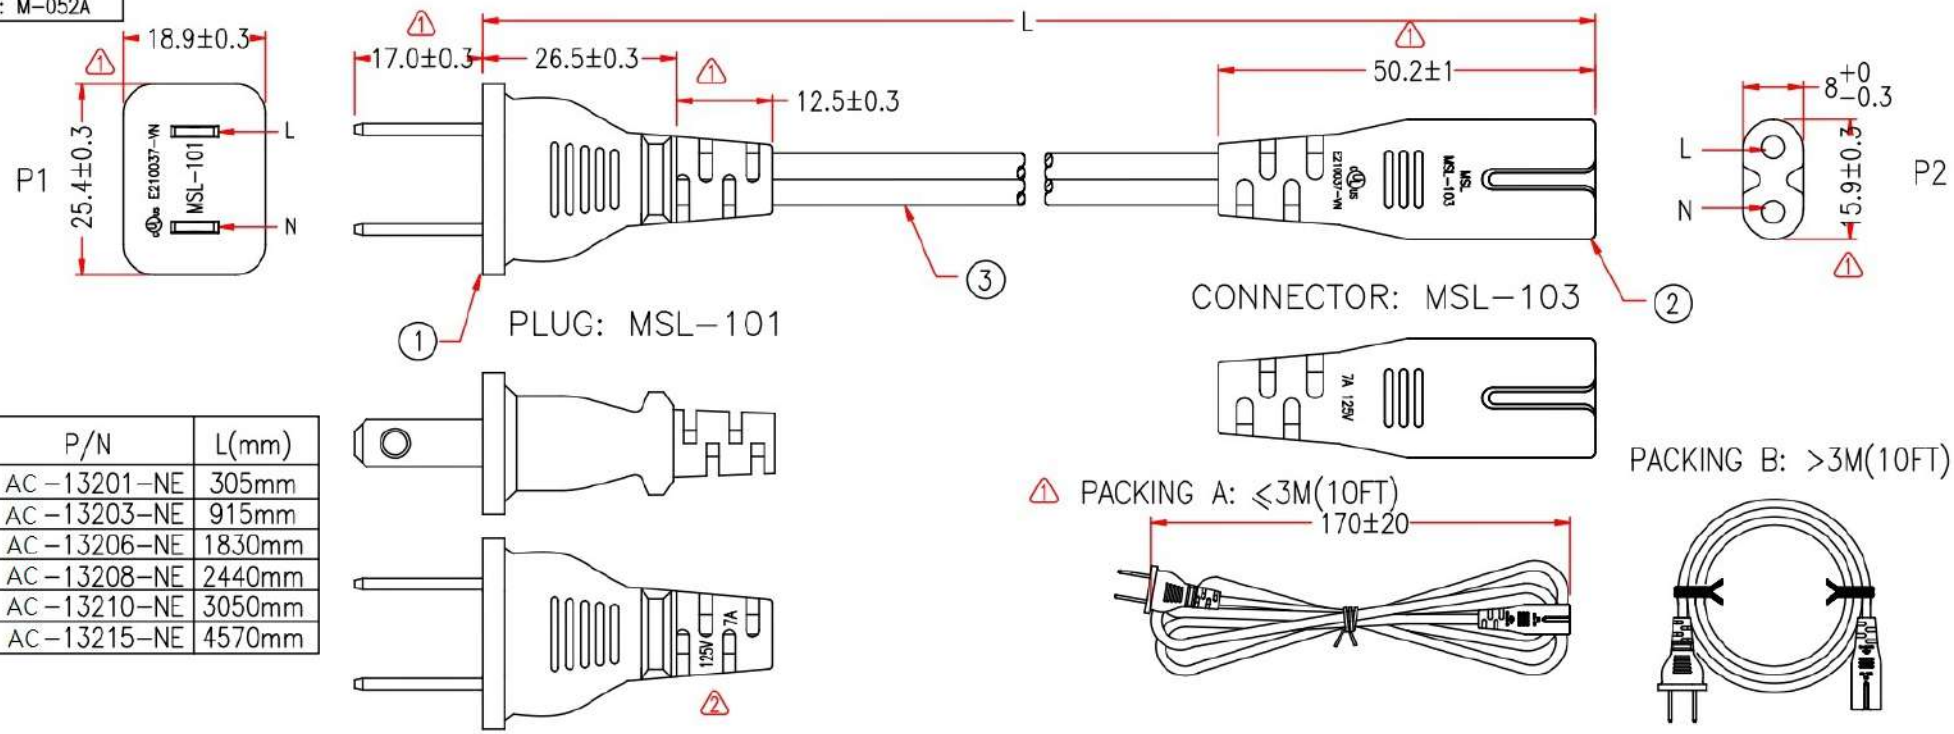

P/N	L(mm)
AC-13201-NE	305mm
AC-13203-NE	915mm
AC-13206-NE	1830mm
AC-13208-NE	2440mm
AC-13210-NE	3050mm
AC-13215-NE	4570mm

CABLE MARKING:

(UL) SPT-2 2/C 18AWG(0.824MM^2) VW-1 105°C 300V E204978 C(UL)

SPT-2 2/C 0.824MM^2(18AWG) FT2 105°C 300V E204978 MSL-VN-

P1,P2: c(UL)us E210037-VN

NOTE: All relevant materials are complied with RoHS directive .
THE CABLE MARKING IS CONCAVE LETTERING MOULD

101103A2F18L(FP000-10)

P1		P2
L	———	L
N	———	N

No.	DESCRIPTION		Q'TY	Supplier
3	UL SPT-2 18AWG x 2C, OD 3.5*6.9mm, JACKET BLACK, DRAWING No. EPSPT001802C-050	H5TA04-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	2.35 BRACKET: YS-031, COLOR BLACK	A1QC03-0767K09	1	M767
	2.35 TERMINAL: 98714PS-0	A1QB05-0257	2	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-001	A1QC02-0767	1	M767
	TERMINAL: 98661BS-1	A1QB01-0257	2	M257

APPROVED		CompuCableUSA	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm; 201~1000mm ±20mm; 1001 ~1500mm ±25mm; 1501~2100mm ±30mm; 2100mm↑ ±40mm	
CHECKED	HU			
DESINGER	XJW			
DRAWING	DAI			
DATE	10/APR/24	ITEM NO. AC-132XX-NE	UNIT:mm	

2 REV.2 2024.04.10	MODIFY CURRENT, ADD P/N
1 REV.1 2023.06.16	MODIFY PLUG LOGO&MODEL TOLERANCE&PACKING SIZE&CABLE

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm