

PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop, safety doors, and light grids up to SIL 3, Cat. 4, PL e, 1 or 2-channel operation, automatic or manual, monitored start, 3 enabling current paths, $U_S = 24 \text{ V DC}$, plug-in screw terminal block

Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061
- Low housing width of just 12.5 mm
- 2 channel control
- 3 enabling current paths, 1 digital signal output
- Manually monitored and automatic activation in a single device

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 2700569 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DNA |
| Product key | DNA181 |
| Catalog page | Page 223 (C-6-2019) |
| GTIN | 4046356912570 |
| Weight per piece (including packing) | 173.866 g |
| Weight per piece (excluding packing) | 172.9 g |
| Customs tariff number | 85371098 |
| Country of origin | DE |

Technical data

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Product properties

| | |
|----------------|--|
| Product type | Safety relays |
| Product family | PSRmini |
| Application | Emergency stop |
| | Safety door |
| | Light grid |
| | Magnetic switch |
| | Transponder |
| Control | 2-channel |
| Relay type | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 2 |

Times

| | |
|-------------------------------|--|
| Typical response time | < 175 ms (automatic start) |
| | < 175 ms (manual, monitored start) |
| Typ. starting time with U_S | < 250 ms (when controlled via A1) |
| Typical release time | < 20 ms (on demand via the sensor circuit) |
| | < 20 ms (on demand via A1) |
| Restart time | < 1 s (Boot time) |
| Recovery time | < 500 ms |
| Start pulse length | ≥ 500 ms (manual start) |

Electrical properties

| | |
|---|---|
| Maximum power dissipation for nominal condition | 4.8 W ($U_S = 26.4$ V, $I_L^2 = 48$ A ² , $P_{\text{Total max}} = 2.4$ W + 2.4 W) |
| Nominal operating mode | 100% operating factor |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage/insulation | See section "Insulation coordination" |

Supply

| | |
|--|--|
| Designation | A1/A2 |
| Rated control circuit supply voltage U_S | 20.4 V DC ... 26.4 V DC |
| Rated control circuit supply voltage U_S | 24 V DC -15 % / +10 % |
| Rated control supply current I_S | typ. 80 mA |
| Power consumption at U_S | typ. 1.92 W |
| Inrush current | typ. 5 A ($\Delta t = 200$ μ s at U_S) |

PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

| | |
|--------------------|---|
| Filter time | 1 ms (at A1 in the event of voltage dips at U_S) |
| Protective circuit | Serial protection against polarity reversal; Suppressor diode |

Input data

Digital: Sensor circuit (S12, S22)

| | |
|---|---|
| Description of the input | safety-related sensor inputs |
| Number of inputs | 2 |
| Input voltage range "0" signal | 0 V DC ... 5 V DC (for safe Off; at S12 and S22) |
| Input current range "0" signal | 0 mA ... 2 mA (for safe Off; at S12 and S22) |
| Inrush current | < 20 mA (typ. with U_S at S12) < 5 mA (typ. with U_S at S22) |
| Filter time | max. 1.5 ms (Test pulse width of low test pulses) Test pulse rate = 5 x Test pulse width |
| Concurrence | ∞ |
| Max. permissible overall conductor resistance | 150 Ω |
| Protective circuit | Suppressor diode |
| Current consumption | < 5 mA (typ. with U_S) |

Digital: Start circuit (S34)

| | |
|---|---|
| Description of the input | non-safety-related |
| Number of inputs | 1 |
| Input voltage range "1" signal | 20.4 V DC ... 26.4 V DC |
| Inrush current | typ. 200 mA (typ. with U_S) |
| Max. permissible overall conductor resistance | 150 Ω |
| Protective circuit | Suppressor diode |
| Current consumption | < 10 mA (typ. with U_S at S34/24 V) > -5 mA (typ. with U_S at S34/0 V) |

Output data

Relay: Enabling current paths (13/14, 23/24, 33/34)

| | |
|-----------------------------|---|
| Output description | 2 N/O contacts each in series, safety-related, floating |
| Number of outputs | 3 (undelayed) |
| Contact switching type | 3 enabling current paths |
| Contact material | AgSnO ₂ |
| Switching voltage | min. 12 V AC/DC max. 250 V AC/DC |
| Switching capacity | min. 60 mW |
| Inrush current | min. 3 mA max. 6 A |
| Limiting continuous current | 6 A |
| Sq. Total current | 48 A ² (observe derating) |
| Switching frequency | 0.1 Hz |
| Mechanical service life | 10x 10 ⁶ cycles |
| Output fuse | 6 A gL/gG |

PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

| | |
|--|---|
| | 4 A gL/gG (for low-demand applications) |
|--|---|

Signal: M1

| | |
|------------------------|---|
| Output description | non-safety-related |
| Number of outputs | 1 (digital, PNP) |
| Voltage | 22 V DC ($U_s - 2 \text{ V}$) |
| Current | max. 100 mA |
| Maximum inrush current | 500 mA ($\Delta t = 1 \text{ ms}$ at U_s) |
| Protective circuit | Suppressor diode |

Connection data

Connection technology

| | |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

Conductor connection

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Conductor cross section rigid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section AWG | 24 ... 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm ... 0.6 Nm |

Signaling

| | |
|---------------------------|-----------------|
| Status display | 3 x LED (green) |
| Operating voltage display | 1 x LED (green) |

Dimensions

| | |
|--------|----------|
| Width | 12.5 mm |
| Height | 112.2 mm |
| Depth | 114.5 mm |

Material specifications

| | |
|------------------|-------------------|
| Color (Housing) | yellow (RAL 1018) |
| Housing material | PA |

Characteristics

Safety data

| | |
|---------------|---|
| Stop category | 0 |
|---------------|---|

Safety data: EN ISO 13849

| | |
|------------------------|--|
| Category | 4 |
| Performance level (PL) | e (4 A DC13; 5 A AC15; 8760 switching cycles/year) |

Safety data: IEC 61508 - High demand

PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

| | |
|-------------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
| Safety data: IEC 61508 - Low demand | |
| Safety Integrity Level (SIL) | 3 |
| Safety data: EN IEC 62061 | |
| Safety Integrity Level (SIL) | 3 |

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Ambient temperature (operation) | -40 °C ... 55 °C (observe derating) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Maximum altitude | ≤ 2000 m (Above sea level) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock | 15g |
| Vibration (operation) | 10 Hz ... 150 Hz, amplitude 0.15 mm, 2g |

Approvals

CE

| | |
|----------------|--------------|
| Identification | CE-compliant |
|----------------|--------------|

Mounting

| | |
|-------------------|------------------------|
| Mounting type | DIN rail mounting |
| Assembly note | See derating curve |
| Mounting position | vertical or horizontal |

PSR-MC40-3NO-1DO-24DC-SC - Safety relays




2700569


<https://www.phoenixcontact.com/in/products/2700569>

Drawings

Circuit diagram

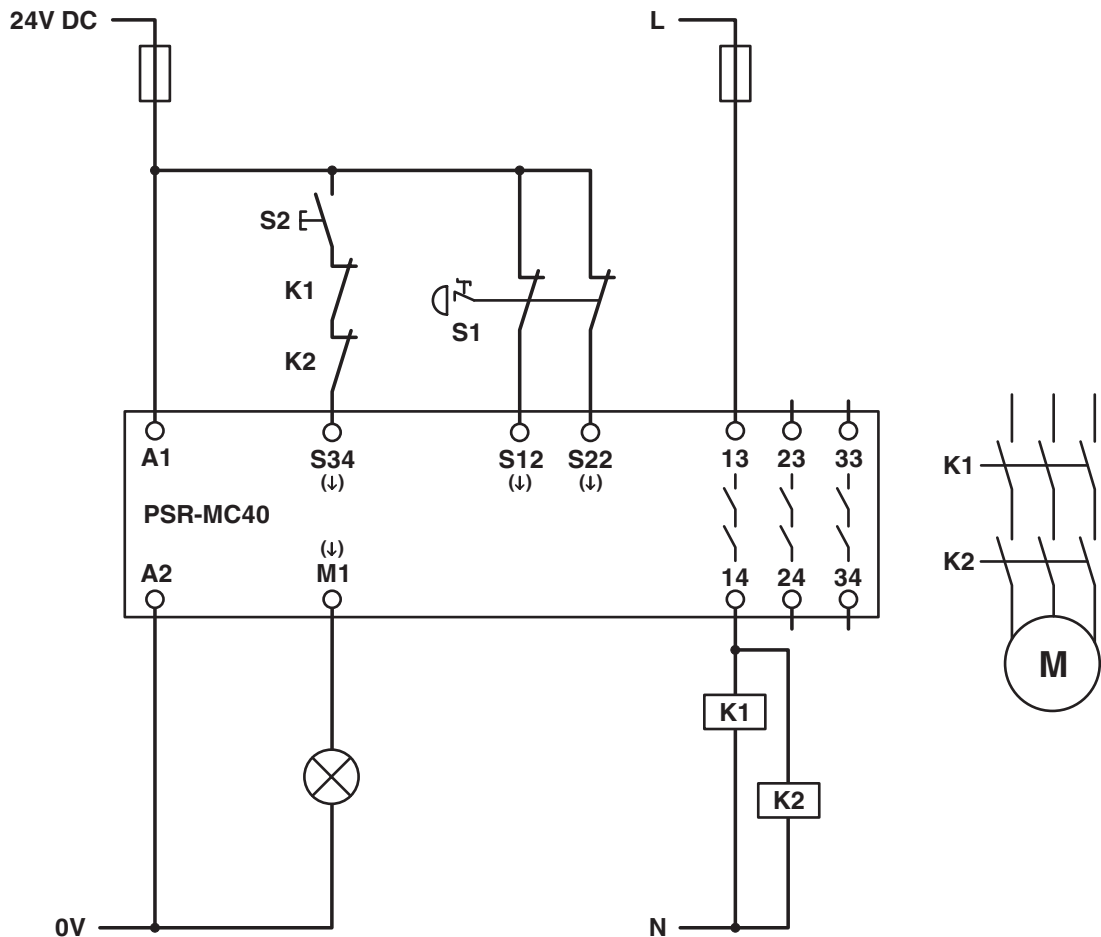

Block diagram

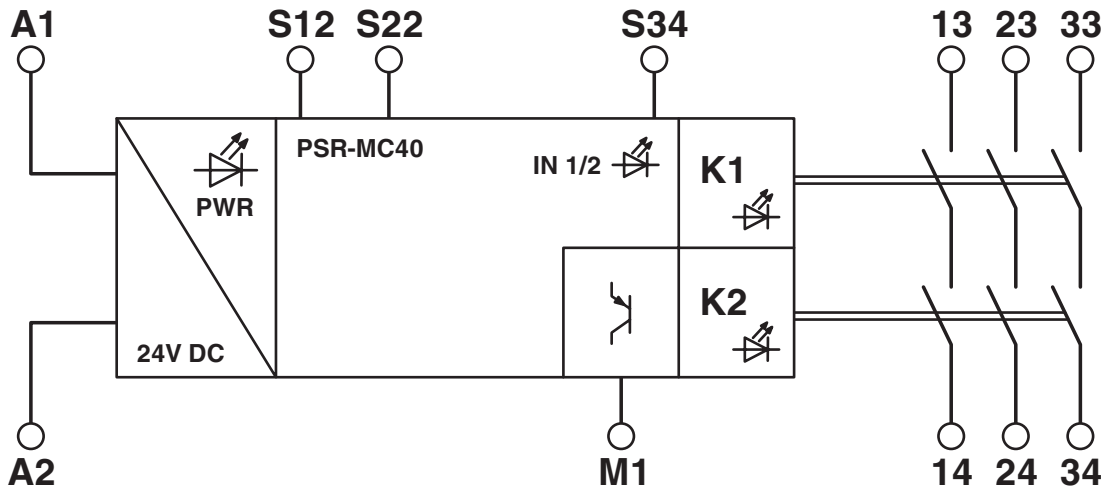

Block diagram


PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

Block diagram

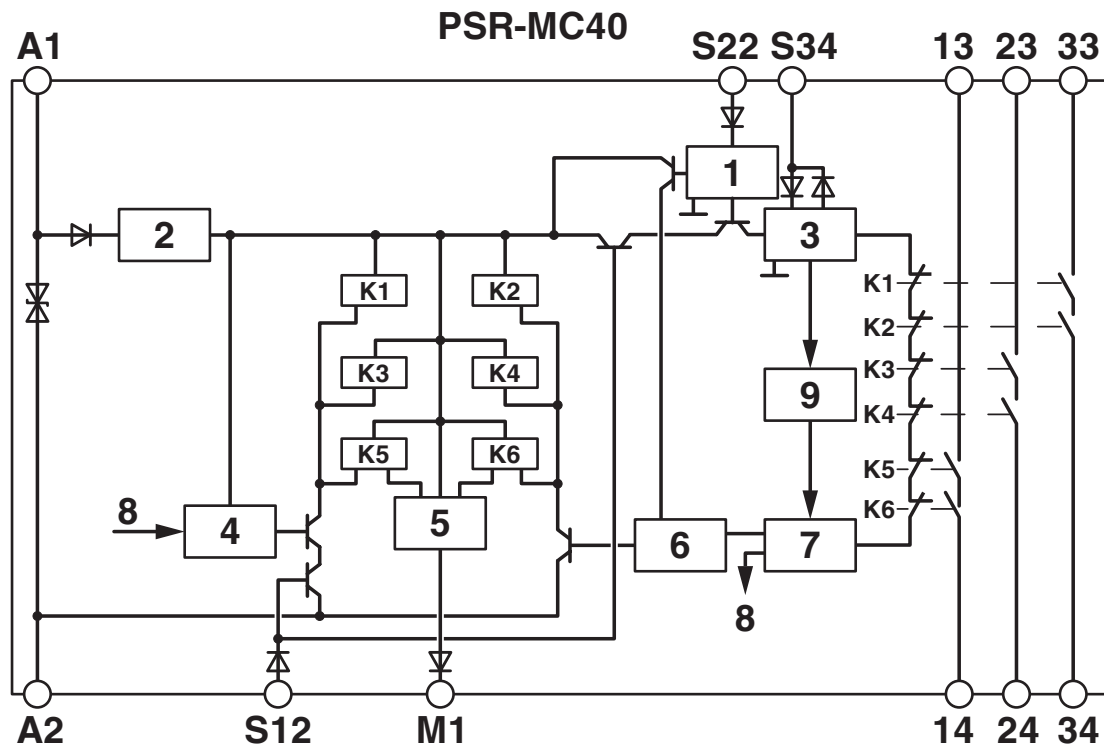

Key:

- 1 = Input circuit
- 2 = Voltage limitation
- 3 = Start circuit
- 4 = Control circuit channel 1
- 5 = Control circuit signal output
- 6 = Control circuit channel 2
- 7 = Start channel 1 and 2
- 8 = Channel 1
- 9 = Diagnostics
- K1, K2 ... K6 = Force-guided elementary relays


PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2700569>



Functional Safety

Approval ID: 44-205-13755201



Functional Safety

Approval ID: 44-4780-13755201



cULus Listed

Approval ID: E140324

PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27371819 |
|-------------|----------|

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

PSR-MC40-3NO-1DO-24DC-SC - Safety relays



2700569

<https://www.phoenixcontact.com/in/products/2700569>

Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | b16af40d-7e43-456e-8c88-d89e2cff39b9 |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in