


2-conductor ground terminal block; 4 mm²; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®



Note: Some items may not be available from your local WAGO company.
Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ☒ Compliant

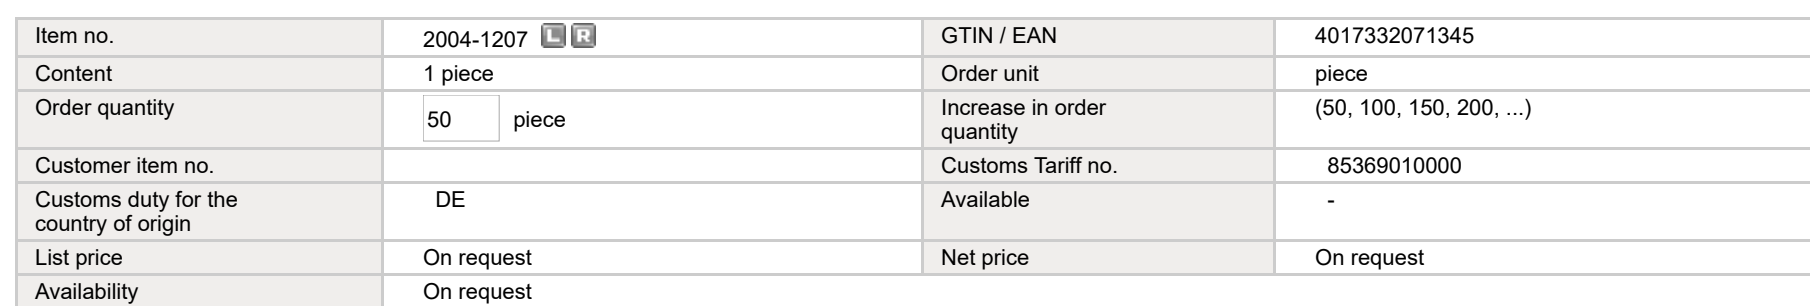

Item	Description
1	...
2	...
3	...
4	...
5	...
6	...
7	...
8	...
9	...
10	...
11	...
12	...
13	...
14	...
15	...
16	...
17	...
18	...
19	...
20	...
21	...
22	...
23	...
24	...
25	...
26	...
27	...
28	...
29	...
30	...
31	...
32	...
33	...
34	...
35	...
36	...
37	...
38	...
39	...
40	...
41	...
42	...
43	...
44	...
45	...
46	...
47	...
48	...
49	...
50	...
51	...
52	...
53	...
54	...
55	...
56	...
57	...
58	...
59	...
60	...
61	...
62	...
63	...
64	...
65	...
66	...
67	...
68	...
69	...
70	...
71	...
72	...
73	...
74	...
75	...
76	...
77	...
78	...
79	...
80	...
81	...
82	...
83	...
84	...
85	...
86	...
87	...
88	...
89	...
90	...
91	...
92	...
93	...
94	...
95	...
96	...
97	...
98	...
99	...
100	...

2-conductor ground terminal block; 4 mm²; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®

Description
Remarks

Item properties

Miscellaneous

Name	Value	Unit
Connection technology	Push-in CAGE CLAMP®	
Actuation type	Push-in	
Connectable conductor materials	Copper	
Nominal cross section	4 mm²	
Solid conductor	0.5 ... 6 mm² / 20 ... 10 AWG	
Solid conductor, push-in termination	1 ... 6 mm² / 14 ... 10 AWG	
Fine-stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG	
Fine-stranded conductor with ferrule, push-in termination 1	0.75 mm² / 18 AWG	
Strip length	11 ... 13 mm / 0.43 ... 0.51 inch	
Total number of connection points	2	
Total number of potentials	1	
Number of levels	1	
Type of wiring	Fixed-end wiring	
Wish	6.2 mm (0.244 in)	
Height from upper-edge of DIN-35 rail	32.0 mm / 1.259 in	
Depth	52.3 mm / 2.059 in	
Design	Horizontal	
Type of mounting	Carrier rail 35 x 15	
Marking level	Center-to-side marking	
Color	Green-yellow	
Insulating material	Polyamide 66 (PA 66)	
Load rating [MJ]	0.12	MJ
Weight (g)	12.417	g
Packaging type	BOX	
[mm]	6.2	mm
Product Family	TOPJOB® S	
Main product function	GMD cond. term. block	
Product type	Through rail-mount term. blocks	