

1557792

https://www.phoenixcontact.com/pc/products/1557792

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Outdoor housing, color: light gray, dimensions: 429 x 410 x 228 mm (16" x 14" x 8"), incl. corner inlays, cover plugs, screws, cover: light gray, plastic latch, material: UV-stabilized polycarbonate

### Your advantages

- · Internationally certified housing system
- · Special plastic ensures safe continuous operation
- · Provides protection against the ingress of jet water
- · Withstands even heavy mechanical strain

#### Commercial data

Item number	1557792
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ACFDBA
GTIN	4067923064461
Weight per piece (excluding packing)	5 kg
Customs tariff number	84879090
Country of origin	EE



1557792

https://www.phoenixcontact.com/pc/products/1557792

### Technical data

#### Notes

Assembly note	Only use the screws provided to screw the components onto the corner inlays, the mounting pillars, and the housing.
Recommendation	To maintain the degree of protection, you must install suitable components with at least the same IP degree of protection in all openings.
Recommendation	Further information and detailed dimensions are available in the download area.
Order information:	Mounting feet, mounting plates, mounting panels, and the mount for mast mounting are available as accessories, but are not supplied as standard.

### Product properties

Product type	Complete housing
Housing type	Outdoor housing
Housing series	OCS
Product family	OCS1614
Туре	Opaque complete housing including mounting material
Ventilation openings present	no
Battery compartment	no

### **Dimensions**

Dimensional drawing	h
Width	410 mm
Height	429 mm
Depth	228 mm
Hole diameter	10 mm (Can be secured mechanically with the latch)

### Material specifications

Color (Housing)	light gray (RAL 7035)
Color (Housing cover)	light gray (RAL 7035)
Material (Housing)	PC UV stabilized
Material (Seal)	PUR
Flammability rating according to UL 94	V2
Surface characteristics	untreated

### Environmental and real-life conditions



1557792

https://www.phoenixcontact.com/pc/products/1557792


Glow-wire test	
Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s
Degree of protection (IP code)	
Specification	IEC 60529:2001-02
Ambient conditions	
Max. IP code to attain	IP69
Max. NEMA code to attain	6P
Impact strength	IK10 (at -35°C +40°C)
Ambient temperature (operation)	-40 °C 80 °C
PCB data	
Type of PCB mount	Bolt mounting
Mounting	
Mounting type	Mast mounting or panel mounting
Mounting position	any
Packaging specifications	
Type of packaging	Box packaging




https://www.phoenixcontact.com/pc/products/1557792



## **Drawings**

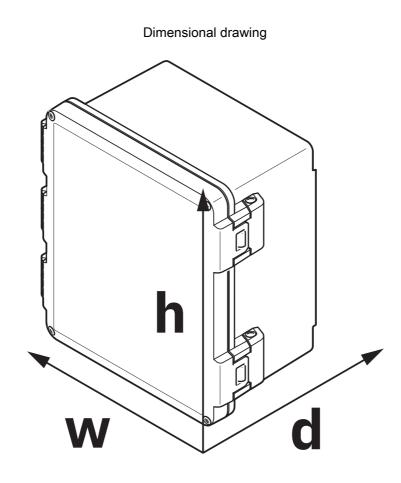

Schematic representation – for additional information, see product range drawing in the Download Center

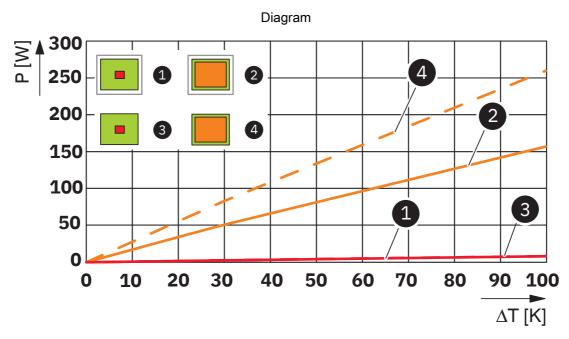


Power dissipation diagram for 0 K  $\dots$  100 K



1557792

https://www.phoenixcontact.com/pc/products/1557792

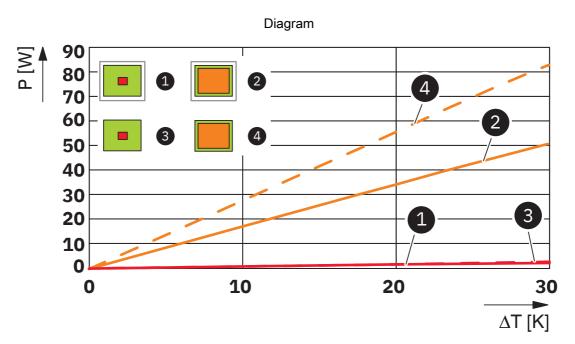

Power dissipation diagram for 0 K ... 30 K



1557792

https://www.phoenixcontact.com/pc/products/1557792

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1557792



cULus Listed

Approval ID: E255026-20221017



1557792

https://www.phoenixcontact.com/pc/products/1557792

## Classifications

ETIM 9.0

### **ECLASS**

	ECLASS-11.0	27182702
	ECLASS-13.0	27190103
ΕT	ТМ	

EC001031



1557792

https://www.phoenixcontact.com/pc/products/1557792

## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements  Exemption	Yes 6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com