


40V/5A N-Channel MOSFET

Features

- Trench Power LV MOSFET technology
- High Power and current handing capability

Application


- PWM application
- Load switch




Marking and pin assignment

Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
40V	45mΩ@10V	5A
	60mΩ@4.5V	



SOT-23 top view



Schematic diagram



Pb-Free



RoHS



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter		Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)				
V _{DS}	Drain-Source Breakdown Voltage		40	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-50 to 150	°C
I _S	Diode Continuous Forward Current	Tc=25°C	5	A
Mounted on Large Heat Sink				
I _{DM}	Pulse Drain Current Tested	Tc=25°C	20	A
I _D	Continuous Drain Current@GS=10V	Tc=25°C	5	A
P _D	Maximum Power Dissipation	Tc=25°C	1.2	W
R _{θJA}	Thermal Resistance Junction-Ambient(([*] 1 in2 Pad of 2-oz Copper), Max.)		104	°C/W

Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	VGS=0V, ID=250μA	40	--	--	V
IDSS	Zero Gate Voltage Drain Current	VDS=40V, VGS=0V	--	--	1	uA
IGSS	Gate-Body Leakage Current	VGS=±20V, VDS=0V	--	--	±100	nA
VGS(th)	Gate Threshold Voltage	VDS=VGS, ID=250μA	1.0	1.5	2.5	V
RDS(on)	Drain-Source On-State Resistance	VGS=10V, ID=5A	--	35	45	mΩ
		VGS=4.5V, ID=4A	--	50	60	
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
CISS	Input Capacitance	VDS=10V, VGS=0V, f=1MHz	--	490	--	pF
COSS	Output Capacitance		--	90	--	pF
CRSS	Reverse Transfer Capacitance		--	70	--	pF
Switching Characteristics						
Qg	Total Gate Charge	VDS=10V, ID=4.5A, VGS=4.5V	--	5.2	--	nC
Qgs	Gate Source Charge		--	1.0	--	nC
Qgd	Gate Drain Charge		--	1.3	--	nC
td(on)	Turn-on Delay Time	VDD=20V, RL=2Ω, VGS=10V, RG=3Ω	--	13	--	nS
tr	Turn-on Rise Time		--	54	--	nS
td(off)	Turn-Off Delay Time		--	18	--	nS
tf	Turn-Off Fall Time		--	11	--	nS
Source- Drain Diode Characteristics						
VSD	Forward on voltage	Tj=25℃, Is=5A,	--	--	1.2	V

Typical Operating Characteristics

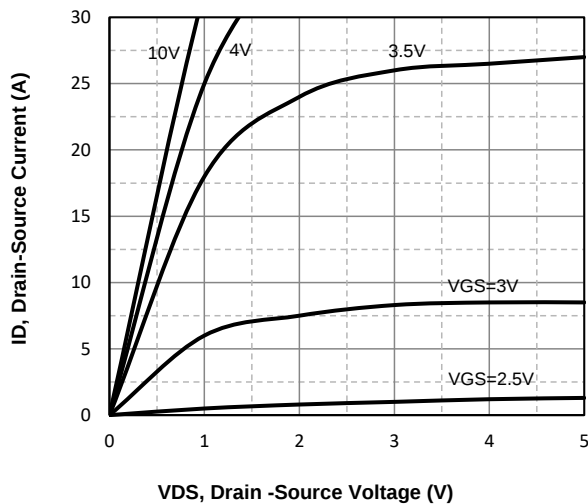


Fig1. Typical Output Characteristics

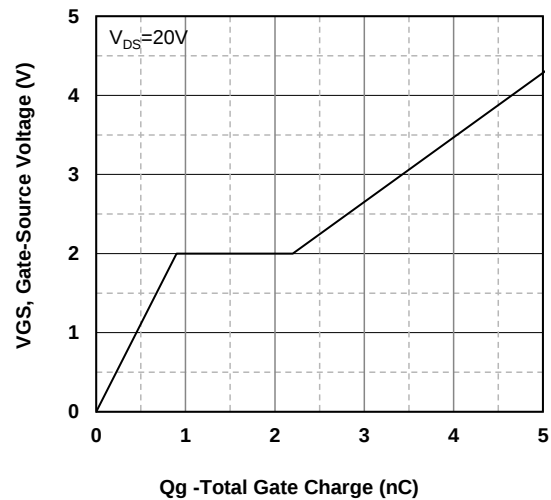


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

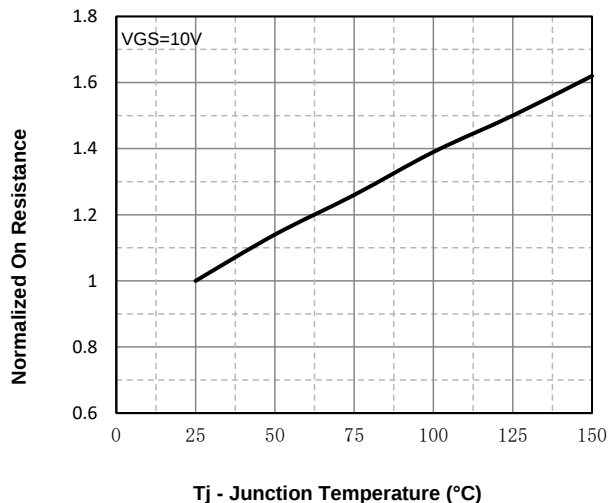


Fig3. Normalized On-Resistance Vs. Temperature

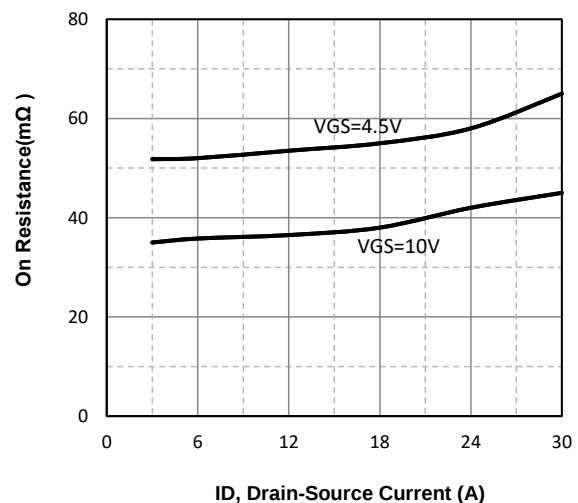


Fig4. On-Resistance Vs. Drain-Source Current

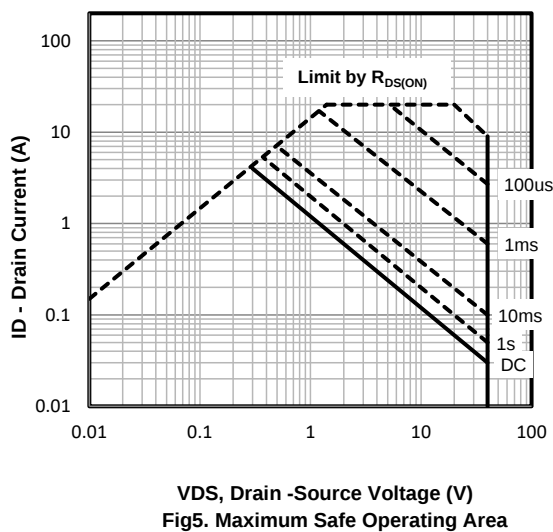


Fig5. Maximum Safe Operating Area

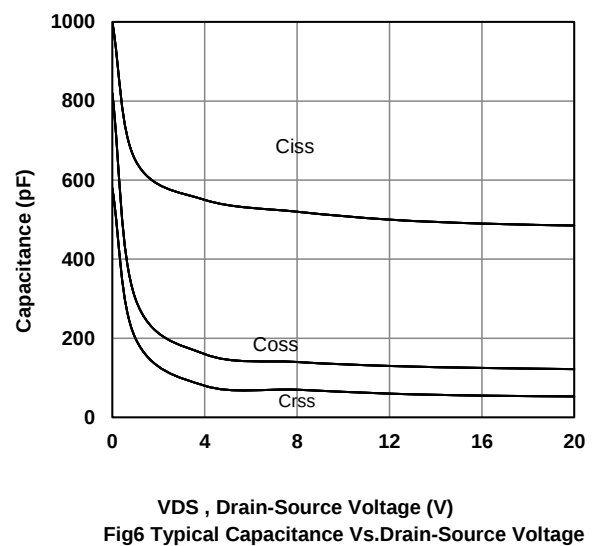
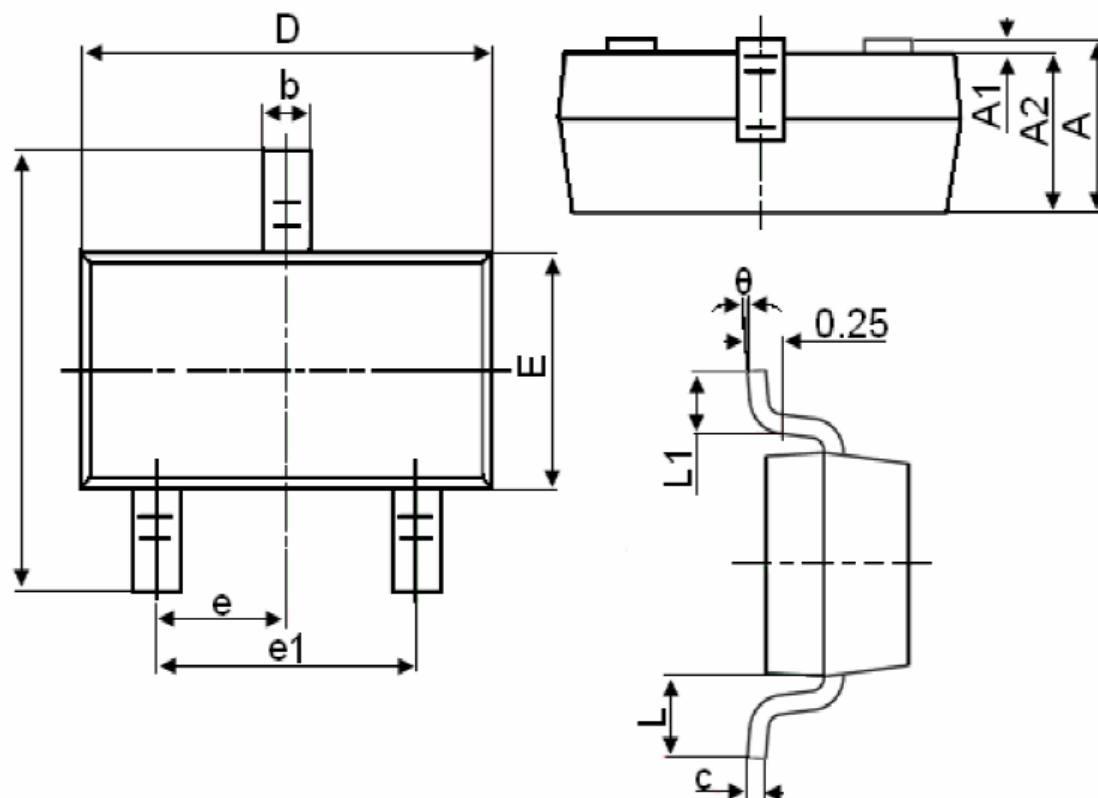


Fig6 Typical Capacitance Vs. Drain-Source Voltage

SOT-23 Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°