

OW/OX/OY Series

Ceramic Composition 10% Tolerance



The OW/OX/OY Series of fixed ceramic resistors are ideal for circuitry associated with surges, high peak power or high energy. They offer enhanced performance in high voltage power supplies, R-C snubber circuits, and inrush limiters. The OW/OX/OY resistors can often replace carbon composition resistors which can be difficult to source.

FEATURES

- Replaces 1 and 2 watt carbon composition resistors
- Meets high energy density demands
- High peak power
- 10% Tolerance
- Non-Inductive



SERIES SPECIFICATIONS

Series	Watts max.*	Resistance range	Joules max.**	Max. working volts
OW	0.5	4.7Ω-100K	30	200
OX	1	3.3Ω-100K	50	300
OY	2	3.3Ω-1M	80	400

* at 70°C. **For a single impulse.


CHARACTERISTICS

Terminals	Pb-free solder-coated axial
Coating	Silicone ceramic
Derating	Linear from 100% @ +70°C to 0% @ +200°C
Operating Temp. Range	-40°C to +220°C
Tolerance	±10% standard
Power Rating	Based on 70°C free air rating
Temperature Coefficient	-1300 ±300ppm/°C.

Test	Condition	Maximum ΔR
Life Test	MIL-STD-202, Method 108	±5%
Short Time Overload	2x rated V, 5 sec ON @ 70°C	±(2% +0.05Ω)
Resistance to Pulse¹	20,000 cycles. See circuit for test conditions	±5%
Thermal Shock	MIL-STD-202, Method 107	±(2% ±0.05Ω)
Moisture Resistance	1000 hrs @ 40°C, 90 - 95% RH	±5%



	OW	OX	OY
Max Working Voltage	200V	300V	400V
Dielectric Strength	500V	500V	700V
Max Overload Voltage	400V	600V	800V
Max Pulse Voltage¹	10KV	14KV	20KV
Pulse Tolerance, 100 pulses	—	1240V @ 52μF, 40J/ 35 sec.	1640V @ 52μF, 70J/35 sec.

¹See figures



14KV and 20KV values used in circuit as shown; full voltage not applied directly to resistor.

Resistance to Pulse

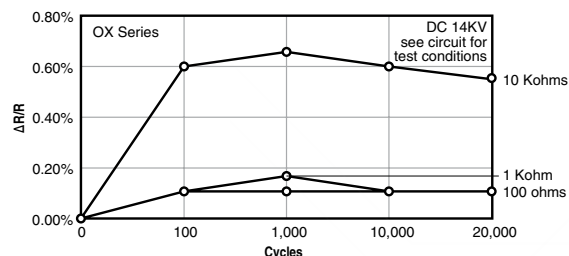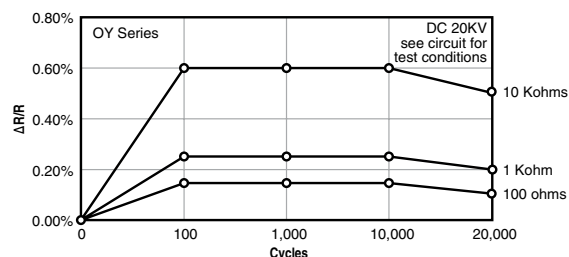


(continued)

Ceramic Composition 10% Tolerance

DIMENSIONS

mm/(in)




Series	Length L ±1.0 (±0.039)	Length C max.	Diameter D ±1.0 (±0.039)	Length ℓ^* ±.118 (±3)	Diam. d (nom.)	Qty. per reel
OW	9/(0.354)	11.1/(0.437)	3.5/(0.138)**	30/(1.18)	0.7/(0.028)	2000
OX	16.5/(0.65)	19.0/(0.748)	5.5/(0.217)	38/(1.5)	0.8/(0.031)	1000
OY	19.0/(0.748)	22.5/(0.886)	7.0/(0.276)	38/(1.5)	0.8/(0.031)	500

*Approx. 27mm for taped & reeled units; lead length changes depending on taping type

 $^{**}\pm 0.5\text{mm} (0.0197)$

Tape and Reel Dimensions

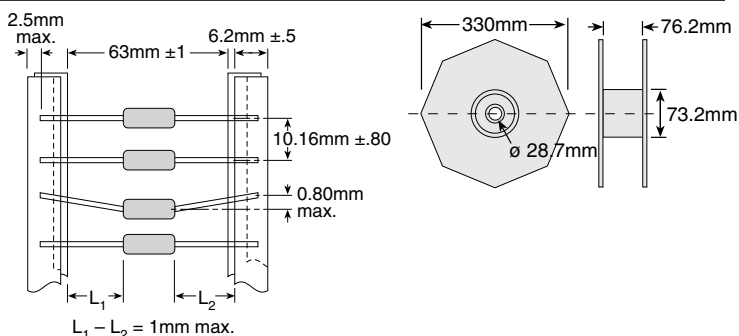

ORDERING INFORMATION

Standard part numbers for OW/OX/OY Series

Omic value				Wattage				Omic value				Wattage				Omic value				Wattage				Omic value				Wattage				Omic value				Wattage																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
Omic value	Part No.	Prefix	Suffix	0.5	1	2	Omic value	Part No.	Prefix	Suffix	0.5	1	2	Omic value	Part No.	Prefix	Suffix	0.5	1	2	Omic value	Part No.	Prefix	Suffix	0.5	1	2	Omic value	Part No.	Prefix	Suffix	0.5	1	2	Omic value	Part No.	Prefix	Suffix	0.5	1	2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
				OW	OX	OY					OW	OX	OY					OW	OX	OY					OW	OX	OY					OW	OX	OY					OW	OX	OY	OW	OX	OY	OW	OX	OY	OW	OX	OY	OW	OX	OY	OW	OX	OY																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
3.3	—	33GKE	✓	✓			27	—	270KE	✓	✓	✓			220	—	221KE	✓	✓	✓			1800	—	182KE	✓	✓	✓			15000	—	153KE	✓	✓	✓			120K	—	124KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
3.9	—	39GKE	✓	✓	✓		33	—	330KE	✓	✓	✓	✓			270	—	271KE	✓	✓	✓	✓			2200	—	222KE	✓	✓	✓	✓			18000	—	183KE	✓	✓	✓	✓			150K	—	154KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
4.7	—	47GKE	✓	✓	✓	✓	39	—	390KE	✓	✓	✓	✓	✓			330	—	331KE	✓	✓	✓	✓	✓			2700	—	272KE	✓	✓	✓	✓	✓			22000	—	223KE	✓	✓	✓	✓	✓			180K	—	184KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
5.6	—	56GKE	✓	✓	✓	✓	47	—	470KE	✓	✓	✓	✓	✓	✓			390	—	391KE	✓	✓	✓	✓	✓	✓			3300	—	332KE	✓	✓	✓	✓	✓	✓			27000	—	273KE	✓	✓	✓	✓	✓	✓			220K	—	224KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
6.8	—	68GKE	✓	✓	✓	✓	56	—	560KE	✓	✓	✓	✓	✓	✓	✓			470	—	471KE	✓	✓	✓	✓	✓	✓	✓			3900	—	392KE	✓	✓	✓	✓	✓	✓			270K	—	274KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
8.2	—	82GKE	✓	✓	✓	✓	68	—	680KE	✓	✓	✓	✓	✓	✓	✓	✓			560	—	561KE	✓	✓	✓	✓	✓	✓	✓			4700	—	472KE	✓	✓	✓	✓	✓	✓			39000	—	393KE	✓	✓	✓	✓	✓	✓	✓			330K	—	334KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
10	—	100KE	✓	✓	✓	✓	82	—	820KE	✓	✓	✓	✓	✓	✓	✓	✓	✓			680	—	681KE	✓	✓	✓	✓	✓	✓	✓			5600	—	562KE	✓	✓	✓	✓	✓	✓			47000	—	473KE	✓	✓	✓	✓	✓	✓	✓			390K	—	394KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
12	—	120KE	✓	✓	✓	✓	100	—	101KE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			820	—	821KE	✓	✓	✓	✓	✓	✓	✓			6800	—	682KE	✓	✓	✓	✓	✓	✓			56000	—	563KE	✓	✓	✓	✓	✓	✓	✓			470K	—	474KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
15	—	150KE	✓	✓	✓	✓	120	—	121KE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			1000	—	102KE	✓	✓	✓	✓	✓	✓			8200	—	822KE	✓	✓	✓	✓	✓	✓	✓			68000	—	683KE	✓	✓	✓	✓	✓	✓	✓			560K	—	564KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
18	—	180KE	✓	✓	✓	✓	150	—	151KE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			1200	—	122KE	✓	✓	✓	✓	✓	✓			10000	—	103KE	✓	✓	✓	✓	✓	✓	✓			82000	—	823KE	✓	✓	✓	✓	✓	✓	✓			680K	—	684KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
22	—	220KE	✓	✓	✓	✓	180	—	181KE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			1500	—	152KE	✓	✓	✓	✓	✓	✓			12000	—	123KE	✓	✓	✓	✓	✓	✓	✓			100K	—	104KE	✓	✓	✓	✓	✓	✓	✓			820K	—	824KE	✓																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						</

Packaging
TR= tape & reel
B = bulk

RoHS Compliant

O X 8 2 G K E -TR

Size	Ohm Value	Tolerance
OW=0.5W	Example:	K= 10% Standard
OX =1W	33G = 3.3 Ohms	
OY =2W	330 = 33 Ohms	
	331 = 330 Ohms	