



Features

- 1.8mm Contact Gap Available
- Wide Contact Terminals for Better Heat Transfer
- Made in Accordance to IEC 60335-1
- 1.8mm Contact Gap Model Meets IEC 62109-2
- Meets EN61095; AC7a at 85°C
- UL/cUL Recognized

UL
E197852



Contact Data*

Contact Configuration	UL Rating	Contact Gap	Coil Power
1A	NO: 35A @ 250/277VAC, Resistive, 50K cycles, 85°C	1.8mm	2.25W
1A & 1C	NO: 60A @ 250/277VAC; General Purpose & Resistive, 20K cycles, 40°C NO: 60A @ 250/277VAC; Resistive, 10K cycles, 65°C NC: 35A @ 250/277VAC; General Purpose & Resistive, 20K cycles, 40°C	1.1mm	1.2W
Contact Resistance	< 30 milliohms initial		
Contact Material	AgSnO ₂		
Maximum Switching Power	13850VA		
Maximum Switching Voltage	277VAC		
Maximum Switching Current	60A		

Coil Data DC Parameters*

Coil Voltage VDC		Coil Resistance Ω +/- 10%		Pick Up Voltage VDC (max) 75% of rated voltage	Release Voltage VDC (min) 10% of rated voltage	Coil Power W	Operate Time ms	Release Time ms
Rated	Max	1.2W	2.25W					
12	15.6	120	64	9.0	1.2	1.2W	≤15	≤10
24	31.2	480	256	18.0	2.4	2.25W		

General Data*

Electrical Life @ rated load	100K cycles, average
Mechanical Life	500K cycles, average
Insulation Resistance	1000M Ω min. @ 500VDC initial
Dielectric Strength	Coil to Contact 4000V rms min. @ sea level Contact to Contact 2500V rms min. @ sea level
Shock Resistance	98m/s ² for 11 ms
Vibration Resistance	1.50mm double amplitude 10~55Hz
Operating Temperature	-40°C to +125°C
Storage Temperature	-40°C to +155°C
Solderability	260°C for 5 s
Weight	30g

* Values can change due to the switching frequency, desired reliability levels, environmental conditions and in-rush load levels. It is recommended to test actual load conditions for the application. It is the user's responsibility to determine the performance suitability for their specific application. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.

Ordering Information

1. Series	J115F1K	1A	H	12VDC	S		K	2.25
J115F1K								
2. Contact Arrangement								
1A = SPST N.O.								
1C = SPDT								
3. Contact Rating								
H = 35A with 1.8mm contact gap ¹								
M = 60A with 1.1mm standard gap ²								
4. Coil Voltages								
12VDC								
24VDC								
5. Sealing Options								
S = Sealed, standard								
6. Contact Material								
Blank = AgSnO ₂								
7. Contact Gap								
Blank = 1.1mm Standard Contact Gap								
K = 1.8mm Contact Gap								
8. Coil Power								
1.2 = 1.2W								
2.25 = 2.25W								


NOTE:

1 — Only available with 1A contact arrangement, 1.8mm contact gap, 2.25W coil power

2 — Only available with 1.1mm standard contact gap, 1.2W coil power

Dimensions

Units = mm

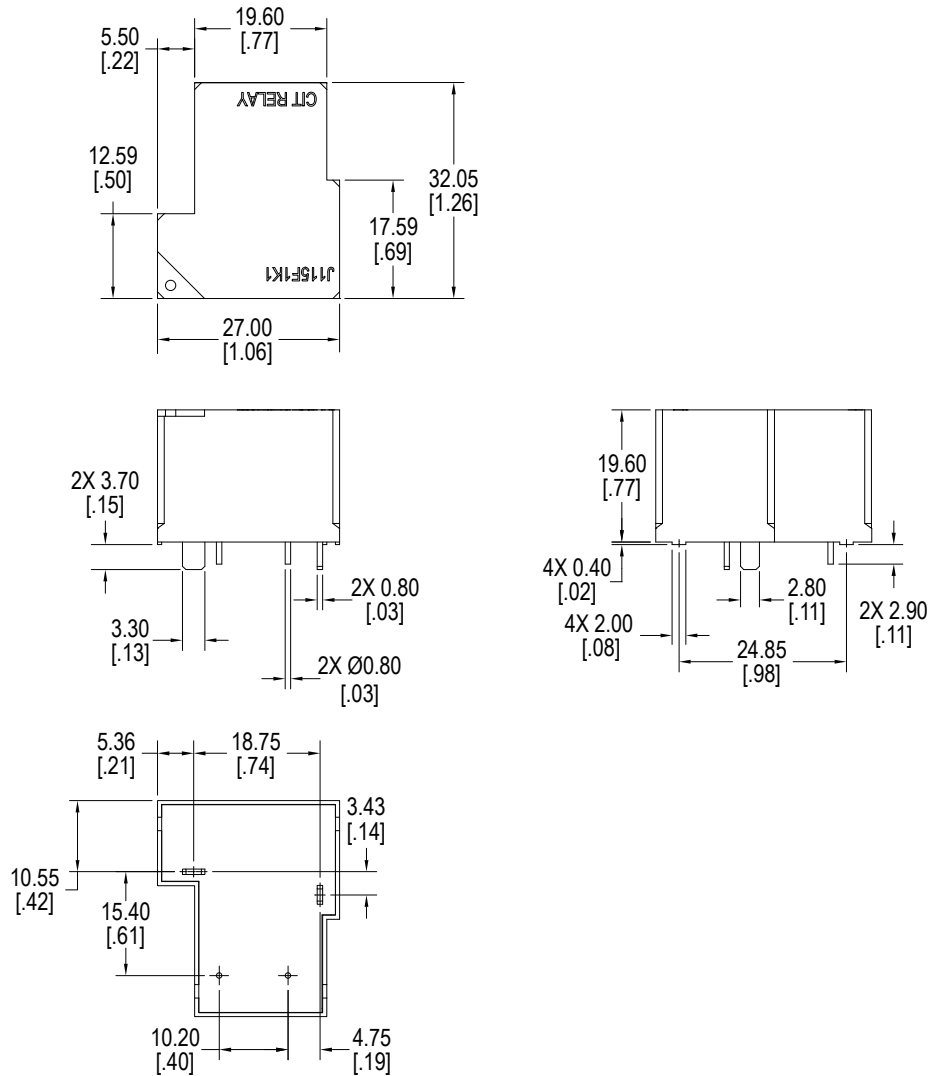

Schematics & PC Layouts

Bottom Views

