


# DIN Track Push-in Terminal Blocks

## XW5T

### Push-in Plus Terminal Blocks to Downsize Control Panels and Save Work



- Push-in Plus terminal blocks are more compact than traditional screw terminal blocks.  
No loosening means maintenance-free application.
- Slim models available down to a width of 3.5 mm to help downsize control panels.
- Light insertion force and strong holding strength to achieve both less wiring work and high reliability.
- 'Hands-free' structure that holds an inserted screwdriver to achieve better workability when wiring stranded wires without crimp terminals.

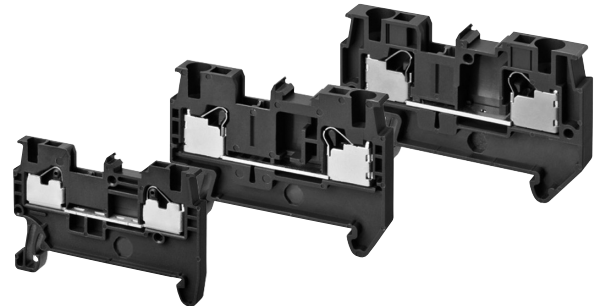

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.



Refer to *Safety Precautions* on page 17.

### Model Number Legend

#### Feed Through Terminal Blocks

**XW5T - P**      
(1) (2) (3)(4)

**(1) Maximum Applicable Stranded Wire**

1.5: 1.5mm<sup>2</sup>  
2.5: 2.5mm<sup>2</sup>  
4.0: 4.0mm<sup>2</sup>

**(2) Wiring**

1.1: 1:1   
1.2: 1:2   
2.2: 2:2

#### Grounding Terminal Blocks

**XW5G - P**     
(1) (2) (3)

**(3) Number of Tiers**

1: 1 tier  
2: 2 tiers


**(4) Color**

Blank: Dark gray  
BL: Blue

# XW5T


## Part Names and Configuration

### DIN Track Terminal Block (Top Surface)

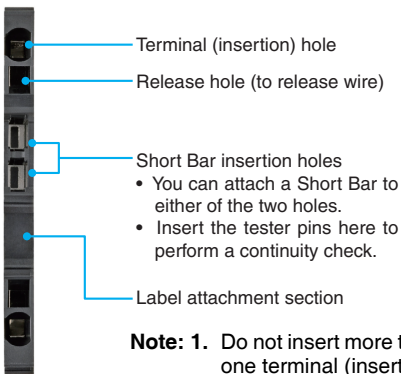

- Note:**
1. Do not insert more than one wire into one terminal (insertion) hole.
  2. Do not insert more than one Short Bar into one Short Bar insertion hole.

### Basic Configuration

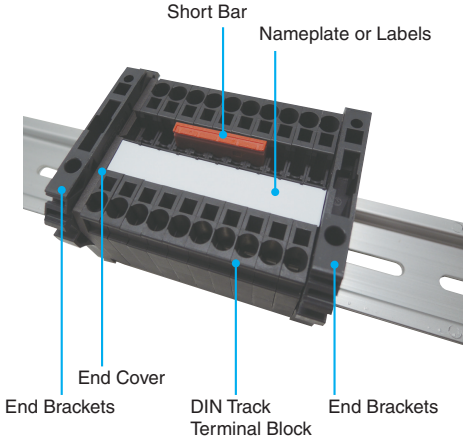

| Name                      | Description                                                                                                                                                                                                 |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DIN Track Terminal Blocks | Both Feed Through and Grounding Terminal Blocks are available.                                                                                                                                              |
| End Cover                 | This part is required to prevent electric shock. Attach one End Cover to the exposed metal surface of the last Terminal Block or to any Terminal Block that is next to a different shape of Terminal Block. |
| End Brackets              | End Brackets must be attached to both ends to hold the Terminal Block in place.                                                                                                                             |
| Nameplate or Labels       | This part is available as an accessory. Select the most suitable one for your needs. You can also use commercially available nameplates that are 9.5 mm wide and 0.5 mm thick. *                            |
| Short Bar                 | This part is available as an accessory. Select one as required.                                                                                                                                             |

\* Two-tier Terminal Blocks with a width of 3.5 mm are excluded.


## Ordering Information

| Classification               | Product Type              | Nominal Cross Section (mm <sup>2</sup> ) | Number of levels | Number of cramp position per level | Color        | Weight (gram) | Model             |
|------------------------------|---------------------------|------------------------------------------|------------------|------------------------------------|--------------|---------------|-------------------|
| Feed Through Terminal blocks | Standard terminals        | 1.0                                      | 1                | 2                                  | Dark grey    | 3.3           | XW5T-P1.5-1.1-1   |
|                              |                           | 2.5                                      | 1                | 2                                  |              | 6.3           | XW5T-P2.5-1.1-1   |
|                              |                           | 4.0                                      | 1                | 2                                  |              | 8.4           | XW5T-P4.0-1.1-1   |
|                              |                           | 1.0                                      | 1                | 2                                  | Blue         | 3.3           | XW5T-P1.5-1.1-1BL |
|                              |                           | 2.5                                      | 1                | 2                                  |              | 6.3           | XW5T-P2.5-1.1-1BL |
|                              |                           | 4.0                                      | 1                | 2                                  |              | 8.4           | XW5T-P4.0-1.1-1BL |
|                              | Multi tiers terminal      | 1.0                                      | 2                | 2                                  | Dark grey    | 6.5           | XW5T-P1.5-1.1-2   |
|                              |                           | 2.5                                      | 2                | 2                                  |              | 12.5          | XW5T-P2.5-1.1-2   |
|                              |                           | 4.0                                      | 2                | 2                                  |              | 16.5          | XW5T-P4.0-1.1-2   |
|                              |                           | 1.0                                      | 2                | 2                                  | Blue         | 6.5           | XW5T-P1.5-1.1-2BL |
|                              |                           | 2.5                                      | 2                | 2                                  |              | 12.5          | XW5T-P2.5-1.1-2BL |
|                              |                           | 4.0                                      | 2                | 2                                  |              | 16.5          | XW5T-P4.0-1.1-2BL |
|                              | Multi conductor terminals | 1.0                                      | 1                | 3                                  | Dark grey    | 4.1           | XW5T-P1.5-1.2-1   |
|                              |                           | 2.5                                      | 1                | 3                                  |              | 8.2           | XW5T-P2.5-1.2-1   |
|                              |                           | 4.0                                      | 1                | 3                                  |              | 10.8          | XW5T-P4.0-1.2-1   |
|                              |                           | 1.0                                      | 1                | 3                                  | Blue         | 4.1           | XW5T-P1.5-1.2-1BL |
|                              |                           | 2.5                                      | 1                | 3                                  |              | 8.2           | XW5T-P2.5-1.2-1BL |
|                              |                           | 4.0                                      | 1                | 3                                  |              | 10.8          | XW5T-P4.0-1.2-1BL |
|                              |                           | 1.0                                      | 1                | 4                                  | Dark grey    | 4.9           | XW5T-P1.5-2.2-1   |
|                              |                           | 2.5                                      | 1                | 4                                  |              | 10.4          | XW5T-P2.5-2.2-1   |
|                              |                           | 4.0                                      | 1                | 4                                  |              | 13.4          | XW5T-P4.0-2.2-1   |
|                              |                           | 1.0                                      | 1                | 4                                  | Blue         | 4.9           | XW5T-P1.5-2.2-1BL |
|                              |                           | 2.5                                      | 1                | 4                                  |              | 10.4          | XW5T-P2.5-2.2-1BL |
|                              |                           | 4.0                                      | 1                | 4                                  |              | 13.4          | XW5T-P4.0-2.2-1BL |
| Grounding Terminal blocks    | Standard terminals        | 1.0                                      | 1                | 2                                  | Green/yellow | 4.7           | XW5G-P1.5-1.1-1   |
|                              |                           | 2.5                                      | 1                | 2                                  |              | 9.9           | XW5G-P2.5-1.1-1   |
|                              |                           | 4.0                                      | 1                | 2                                  |              | 11.8          | XW5G-P4.0-1.1-1   |
|                              | Multi tiers terminal      | 1.0                                      | 2                | 2                                  |              | 8.1           | XW5G-P1.5-1.1-2   |
|                              |                           | 2.5                                      | 2                | 2                                  |              | 16.6          | XW5G-P2.5-1.1-2   |
|                              |                           | 4.0                                      | 2                | 2                                  |              | 20.8          | XW5G-P4.0-1.1-2   |
|                              | Multi conductor terminals | 1.0                                      | 1                | 3                                  |              | 5.5           | XW5G-P1.5-1.2-1   |
|                              |                           | 2.5                                      | 1                | 3                                  |              | 11.6          | XW5G-P2.5-1.2-1   |
|                              |                           | 4.0                                      | 1                | 3                                  |              | 14.1          | XW5G-P4.0-1.2-1   |
|                              |                           | 1.0                                      | 1                | 4                                  |              | 6.3           | XW5G-P1.5-2.2-1   |
|                              |                           | 2.5                                      | 1                | 4                                  |              | 13.8          | XW5G-P2.5-2.2-1   |
|                              |                           | 4.0                                      | 1                | 4                                  |              | 16.7          | XW5G-P4.0-2.2-1   |
|                              |                           |                                          |                  |                                    |              |               |                   |

## Accessories


### Short Bars

For XW5T-P1.5-□ or XW5G-P1.5-□

| Appearance                                                                          | No. of poles | Colors                               | Model*        | Application                                         |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------|---------------|-----------------------------------------------------|
|  | 2            | Red (RD)<br>Blue (BL)<br>Yellow (YL) | XW5S-P1.5-2□  | Used for cross-over wiring between Terminal Blocks. |
|                                                                                     | 3            |                                      | XW5S-P1.5-3□  |                                                     |
|                                                                                     | 4            |                                      | XW5S-P1.5-4□  |                                                     |
|                                                                                     | 5            |                                      | XW5S-P1.5-5□  |                                                     |
|                                                                                     | 10           |                                      | XW5S-P1.5-10□ |                                                     |

\* Replace the box (□) in the model number with the code for the covering color. Specify the color: RD = red, BL = blue, YL = yellow


For XW5T-P2.5-□ or XW5G-P2.5-□

| Appearance                                                                          | No. of poles | Colors                               | Model*        | Application                                         |
|-------------------------------------------------------------------------------------|--------------|--------------------------------------|---------------|-----------------------------------------------------|
|  | 2            | Red (RD)<br>Blue (BL)<br>Yellow (YL) | XW5S-P2.5-2□  | Used for cross-over wiring between Terminal Blocks. |
|                                                                                     | 3            |                                      | XW5S-P2.5-3□  |                                                     |
|                                                                                     | 4            |                                      | XW5S-P2.5-4□  |                                                     |
|                                                                                     | 5            |                                      | XW5S-P2.5-5□  |                                                     |
|                                                                                     | 10           |                                      | XW5S-P2.5-10□ |                                                     |

\* Replace the box (□) in the model number with the code for the covering color. Specify the color: RD = red, BL = blue, YL = yellow


# XW5T

## For XW5T-P4.0-□ or XW5G-P4.0-□

| Appearance                                                                        | No. of poles | Colors                               | Model*        | Application                                         |
|-----------------------------------------------------------------------------------|--------------|--------------------------------------|---------------|-----------------------------------------------------|
|  | 2            | Red (RD)<br>Blue (BL)<br>Yellow (YL) | XW5S-P4.0-2□  | Used for cross-over wiring between Terminal Blocks. |
|                                                                                   | 3            |                                      | XW5S-P4.0-3□  |                                                     |
|                                                                                   | 4            |                                      | XW5S-P4.0-4□  |                                                     |
|                                                                                   | 5            |                                      | XW5S-P4.0-5□  |                                                     |
|                                                                                   | 10           |                                      | XW5S-P4.0-10□ |                                                     |

\* Replace the box (□) in the model number with the code for the covering color. Specify the color: RD = red, BL = blue, YL = yellow

## Labels

| Appearance                                                                        | Applicable Terminal Blocks | Model        | Minimum order in sheets (quantity per sheet) | Application                                          |
|-----------------------------------------------------------------------------------|----------------------------|--------------|----------------------------------------------|------------------------------------------------------|
|  | XW5□-P1.5-□                | XW5Z-P1.5LB1 | 5 sheets with 102 top labels per sheet       | Used to identify wiring. (Material: PA resin, blank) |
|                                                                                   |                            | XW5Z-P1.5LB2 | 5 sheets with 108 side labels per sheet      |                                                      |
|                                                                                   | XW5□-P2.5-□                | XW5Z-P2.5LB1 | 5 sheets with 72 top labels per sheet        |                                                      |
|                                                                                   |                            | XW5Z-P2.5LB2 | 5 sheets with 72 side labels per sheet       |                                                      |
|                                                                                   | XW5□-P4.0-□                | XW5Z-P4.0LB1 | 5 sheets with 60 top labels per sheet        |                                                      |
|                                                                                   |                            | XW5Z-P4.0LB2 | 5 sheets with 60 side labels per sheet       |                                                      |

- Note:**
1. Different models are used for the top and side surfaces.
  2. There is no place to mount the Top-surface Labels on Two-tier Terminal Blocks with a width of 3.5 mm, so they cannot be used.
  3. If you use commercially available nameplates (9.5 mm width and 0.5 mm thickness), you can use a commercially available printer. Check with the manufacturer of the nameplates for information on applicable printers.
  4. Refer to page 20 for details on printing labels.

## End Cover

| Appearance                                                                          | Applicable Terminal Blocks | Model           | Application                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------|----------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | XW5□-P1.5-1.1-1            | XW5E-P1.5-1.1-1 | This part is required to prevent electric shock.<br>Always mount End Covers to the following locations when you use Terminal Blocks. (For details, refer to page 21.)<br>• Exposed metal surface of the last Terminal Block<br>• Any Terminal Block that is next to a different shape of Terminal Block |
|                                                                                     | XW5□-P1.5-1.1-2            | XW5E-P1.5-1.1-2 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P1.5-1.2-1            | XW5E-P1.5-1.2-1 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P1.5-2.2-1            | XW5E-P1.5-2.2-1 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P2.5-1.1-1            | XW5E-P2.5-1.1-1 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P2.5-1.1-2            | XW5E-P2.5-1.1-2 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P2.5-1.2-1            | XW5E-P2.5-1.2-1 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P2.5-2.2-1            | XW5E-P2.5-2.2-1 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P4.0-1.1-1            | XW5E-P4.0-1.1-1 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P4.0-1.1-2            | XW5E-P4.0-1.1-2 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P4.0-1.2-1            | XW5E-P4.0-1.2-1 |                                                                                                                                                                                                                                                                                                         |
|                                                                                     | XW5□-P4.0-2.2-1            | XW5E-P4.0-2.2-1 |                                                                                                                                                                                                                                                                                                         |

## End Brackets

| Appearance                                                                          | Width (mm) | Model    | Application                                                                                                 |
|-------------------------------------------------------------------------------------|------------|----------|-------------------------------------------------------------------------------------------------------------|
|  | 6          | XW5Z-EP6 | End Brackets are installed on the ends of the Terminal Blocks to prevent them from moving on the DIN Track. |

## Separator Plates

| Appearance                                                                          | Width (mm) | Model     | Application                                                                                                                                                                     |
|-------------------------------------------------------------------------------------|------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 12         | XW5Z-EP12 | This part is used to create insulation distance. Use Separator Plates according to the clearance and creeping distances required by the operating conditions of your equipment. |


**Note:** Refer to 6. Using the Accessories on page 20 for information on using the accessories.



## Ratings and Performance

### Ratings




#### Feed Through Terminal blocks Standard terminals

| Model                          |  | XW5T-P1.5-1.1-1 (BL)                                                                    |                                |            |              | XW5T-P2.5-1.1-1 (BL)                                                                    |  |  |  | XW5T-P4.0-1.1-1 (BL)                                                                    |  |  |  |
|--------------------------------|--|-----------------------------------------------------------------------------------------|--------------------------------|------------|--------------|-----------------------------------------------------------------------------------------|--|--|--|-----------------------------------------------------------------------------------------|--|--|--|
|                                |  | 1 tier, 1:1                                                                             |                                |            |              | 1 tier, 1:1                                                                             |  |  |  | 1 tier, 1:1                                                                             |  |  |  |
| Appearance and internal wiring |  |        |                                |            |              |       |  |  |  |      |  |  |  |
|                                |  | NOMINAL CROSS SECTION                                                                   |                                |            |              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                           |  |  |  | 2.5 mm <sup>2</sup>                                                                     |  |  |  |
|                                |  | Minimum conductor cross section solid                                                   |                                |            |              | 0.14 mm <sup>2</sup>                                                                    |  |  |  | 0.14 mm <sup>2</sup>                                                                    |  |  |  |
|                                |  | Maximum conductor cross section solid                                                   |                                |            |              | 1.5 mm <sup>2</sup>                                                                     |  |  |  | 4.0 mm <sup>2</sup>                                                                     |  |  |  |
|                                |  | Minimum conductor cross section fine stranded                                           |                                |            |              | 0.08 mm <sup>2</sup>                                                                    |  |  |  | 0.14 mm <sup>2</sup>                                                                    |  |  |  |
|                                |  | Maximum conductor cross section fine stranded                                           |                                |            |              | 1.5 mm <sup>2</sup>                                                                     |  |  |  | 2.5 mm <sup>2</sup>                                                                     |  |  |  |
|                                |  | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve      |                                |            |              | 0.14 mm <sup>2</sup>                                                                    |  |  |  | 0.14 mm <sup>2</sup>                                                                    |  |  |  |
|                                |  | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve      |                                |            |              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                           |  |  |  | 2.5 mm <sup>2</sup>                                                                     |  |  |  |
| Dimensions                     |  | 3.5 × 45 × 30.5                                                                         |                                |            |              | 5.2 × 48.8 × 35.3                                                                       |  |  |  | 6.2 × 56.1 × 35.3                                                                       |  |  |  |
| IEC rated voltage              |  | 500 V                                                                                   |                                |            |              | 800 V                                                                                   |  |  |  | 800 V                                                                                   |  |  |  |
| IEC rated current              |  | 17.5 A/1.5 mm <sup>2</sup>                                                              |                                |            |              | 24 A/2.5 mm <sup>2</sup>                                                                |  |  |  | 32 A/4.0 mm <sup>2</sup>                                                                |  |  |  |
| Usage Group (UG)               |  | B, C      D                                                                             |                                |            |              | B, C                                                                                    |  |  |  |                                                                                         |  |  |  |
| UL rated voltage               |  | 300 V                                                                                   | 51-150 V                       | 151-300 V  | 301-600 V    | 600 V                                                                                   |  |  |  |                                                                                         |  |  |  |
| UL rated current               |  | 15 A/AWG14 (SOL)<br>10 A/AWG16                                                          | 15 A/AWG14 (SOL)<br>10 A/AWG16 | 10 A/AWG16 | 5 A/AWG16-20 | 20 A/AWG12 (SOL), 15 A/AWG14                                                            |  |  |  | 30 A/AWG10 (SOL), 20 A/AWG12                                                            |  |  |  |
| Dielectric strength            |  | 1,890 VAC for 1 min (leakage current: 1 mA max.)                                        |                                |            |              | 2,000 VAC for 1 min (leakage current: 1 mA max.)                                        |  |  |  | 2,000 VAC for 1 min (leakage current: 1 mA max.)                                        |  |  |  |
| End Cover                      |  | XW5E-P1.5-1.1-1                                                                         |                                |            |              | XW5E-P2.5-1.1-1                                                                         |  |  |  | XW5E-P4.0-1.1-1                                                                         |  |  |  |
| Special tool                   |  | XW4Z-00B                                                                                |                                |            |              | XW4Z-00B                                                                                |  |  |  | XW4Z-00B                                                                                |  |  |  |
| Applicable nameplates          |  | XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness |                                |            |              | XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness |  |  |  | XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness |  |  |  |
| Applicable Short Bars          |  | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                            |                                |            |              | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                            |  |  |  | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                            |  |  |  |

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.

\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.




## Feed Through Terminal blocks Multi tiers terminal

| Model                          |                                                                                    | XW5T-P1.5-1.1-2 (BL)                                                                              | XW5T-P2.5-1.1-2 (BL)                                                                               | XW5T-P4.0-1.1-2 (BL)                                                                                |
|--------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Appearance and internal wiring |                                                                                    | 2 tiers, 1:1<br> | 2 tiers, 1:1<br> | 2 tiers, 1:1<br> |
| Applicable wire sizes*1        | NOMINAL CROSS SECTION                                                              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                     | 2.5 mm <sup>2</sup>                                                                                | 4.0 mm <sup>2</sup>                                                                                 |
|                                | Minimum conductor cross section solid                                              | 0.14 mm <sup>2</sup>                                                                              | 0.14 mm <sup>2</sup>                                                                               | 0.2 mm <sup>2</sup>                                                                                 |
|                                | Maximum conductor cross section solid                                              | 1.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                | 6.0 mm <sup>2</sup>                                                                                 |
|                                | Minimum conductor cross section fine stranded                                      | 0.08 mm <sup>2</sup>                                                                              | 0.14 mm <sup>2</sup>                                                                               | 0.2 mm <sup>2</sup>                                                                                 |
|                                | Maximum conductor cross section fine stranded                                      | 1.5 mm <sup>2</sup>                                                                               | 2.5 mm <sup>2</sup>                                                                                | 4.0 mm <sup>2</sup>                                                                                 |
|                                | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 0.14 mm <sup>2</sup>                                                                              | 0.14 mm <sup>2</sup>                                                                               | 0.25 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                     | 2.5 mm <sup>2</sup>                                                                                | 4.0 mm <sup>2</sup>                                                                                 |
| Dimensions                     |                                                                                    | 3.5 × 65.7 × 41.1                                                                                 | 5.2 × 78.8 × 45.9                                                                                  | 6.2 × 85 × 45.9                                                                                     |
| IEC rated voltage              |                                                                                    | 500 V                                                                                             |                                                                                                    |                                                                                                     |
| IEC rated current              |                                                                                    | 17.5 A/1.5 mm <sup>2</sup>                                                                        |                                                                                                    | 28 A/4.0 mm <sup>2</sup>                                                                            |
| Usage Group (UG)               |                                                                                    | B, C                                                                                              | D                                                                                                  | B, C                                                                                                |
| UL rated voltage               |                                                                                    | 300 V                                                                                             | 51-150 V    151-300 V    301-600 V                                                                 | 600 V                                                                                               |
| UL rated current               |                                                                                    | 15 A/AWG14 (SOL)<br>10 A/AWG16                                                                    | 15 A/AWG14 (SOL)<br>10 A/AWG16    10 A/AWG16    5 A/AWG16-20                                       | 20 A/AWG12 (SOL),<br>15 A/AWG14    30 A/AWG10 (SOL),<br>20 A/AWG12                                  |
| Dielectric strength            |                                                                                    | 1,890 VAC for 1 min (leakage current: 1 mA max.)                                                  |                                                                                                    | 2,000 VAC for 1 min (leakage current: 1 mA max.)                                                    |
| End Cover                      |                                                                                    | XW5E-P1.5-1.1-2                                                                                   |                                                                                                    | XW5E-P4.0-1.1-2                                                                                     |
| Special tool                   |                                                                                    | XW4Z-00B                                                                                          |                                                                                                    |                                                                                                     |
| Applicable nameplates          |                                                                                    | XW5Z-P1.5LB2                                                                                      | XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness            | XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness             |
| Applicable Short Bars          |                                                                                    | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                      | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                       | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                        |

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.




\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.

## Feed Through Terminal blocks Multi conductor terminals

| Model                          |                                                                                    | XW5T-P1.5-1.2-1 (BL)                                                                    |                                |            |              | XW5T-P2.5-1.2-1 (BL)                                                                    |  |  |  | XW5T-P4.0-1.2-1 (BL)                                                                    |  |  |  |
|--------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------------------------|------------|--------------|-----------------------------------------------------------------------------------------|--|--|--|-----------------------------------------------------------------------------------------|--|--|--|
| Appearance and internal wiring |                                                                                    | 1 tier, 1:2                                                                             |                                |            |              | 1 tier, 1:2                                                                             |  |  |  | 1 tier, 1:2                                                                             |  |  |  |
|                                |                                                                                    |        |                                |            |              |       |  |  |  |      |  |  |  |
| Applicable wire sizes*1        | NOMINAL CROSS SECTION                                                              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                           |                                |            |              | 2.5 mm <sup>2</sup>                                                                     |  |  |  | 4.0 mm <sup>2</sup>                                                                     |  |  |  |
|                                | Minimum conductor cross section solid                                              | 0.14 mm <sup>2</sup>                                                                    |                                |            |              | 0.14 mm <sup>2</sup>                                                                    |  |  |  | 0.2 mm <sup>2</sup>                                                                     |  |  |  |
|                                | Maximum conductor cross section solid                                              | 1.5 mm <sup>2</sup>                                                                     |                                |            |              | 4.0 mm <sup>2</sup>                                                                     |  |  |  | 6.0 mm <sup>2</sup>                                                                     |  |  |  |
|                                | Minimum conductor cross section fine stranded                                      | 0.08 mm <sup>2</sup>                                                                    |                                |            |              | 0.14 mm <sup>2</sup>                                                                    |  |  |  | 0.2 mm <sup>2</sup>                                                                     |  |  |  |
|                                | Maximum conductor cross section fine stranded                                      | 1.5 mm <sup>2</sup>                                                                     |                                |            |              | 2.5 mm <sup>2</sup>                                                                     |  |  |  | 4.0 mm <sup>2</sup>                                                                     |  |  |  |
|                                | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 0.14 mm <sup>2</sup>                                                                    |                                |            |              | 0.14 mm <sup>2</sup>                                                                    |  |  |  | 0.25 mm <sup>2</sup>                                                                    |  |  |  |
|                                | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                           |                                |            |              | 2.5 mm <sup>2</sup>                                                                     |  |  |  | 4.0 mm <sup>2</sup>                                                                     |  |  |  |
| Dimensions                     |                                                                                    | 3.5 × 54.1 × 30.5                                                                       |                                |            |              | 5.2 × 60.5 × 35.3                                                                       |  |  |  | 6.2 × 66.5 × 35.3                                                                       |  |  |  |
| IEC rated voltage              |                                                                                    | 500 V                                                                                   |                                |            |              | 800 V                                                                                   |  |  |  |                                                                                         |  |  |  |
| IEC rated current              |                                                                                    | 17.5 A/1.5 mm <sup>2</sup>                                                              |                                |            |              | 24 A/2.5 mm <sup>2</sup>                                                                |  |  |  | 32 A/4.0 mm <sup>2</sup>                                                                |  |  |  |
| Usage Group (UG)               |                                                                                    | B, C      D                                                                             |                                |            |              | B, C                                                                                    |  |  |  |                                                                                         |  |  |  |
| UL rated voltage               |                                                                                    | 300 V                                                                                   | 51-150 V                       | 151-300 V  | 301-600 V    | 600 V                                                                                   |  |  |  |                                                                                         |  |  |  |
| UL rated current               |                                                                                    | 15 A/AWG14 (SOL)<br>10 A/AWG16                                                          | 15 A/AWG14 (SOL)<br>10 A/AWG16 | 10 A/AWG16 | 5 A/AWG16-20 | 20 A/AWG12 (SOL),<br>15 A/AWG14                                                         |  |  |  | 30 A/AWG10 (SOL),<br>20 A/AWG12                                                         |  |  |  |
| Dielectric strength            |                                                                                    | 1,890 VAC for 1 min<br>(leakage current: 1 mA max.)                                     |                                |            |              | 2,000 VAC for 1 min<br>(leakage current: 1 mA max.)                                     |  |  |  |                                                                                         |  |  |  |
| End Cover                      |                                                                                    | XW5E-P1.5-1.2-1                                                                         |                                |            |              | XW5E-P2.5-1.2-1                                                                         |  |  |  | XW5E-P4.0-1.2-1                                                                         |  |  |  |
| Special tool                   |                                                                                    | XW4Z-00B                                                                                |                                |            |              |                                                                                         |  |  |  |                                                                                         |  |  |  |
| Applicable nameplates          |                                                                                    | XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness |                                |            |              | XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness |  |  |  | XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness |  |  |  |
| Applicable Short Bars          |                                                                                    | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                            |                                |            |              | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                            |  |  |  | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                            |  |  |  |

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.




\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.

| Model                          |                                                                                    | XW5T-P1.5-2.2-1 (BL)                                                                             | XW5T-P2.5-2.2-1 (BL)                                                                              | XW5T-P4.0-2.2-1 (BL)                                                                               |
|--------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Appearance and internal wiring |                                                                                    | 1 tier, 2:2<br> | 1 tier, 2:2<br> | 1 tier, 2:2<br> |
|                                |                                                                                    |                 |                  |                 |
| Applicable wire sizes*1        | NOMINAL CROSS SECTION                                                              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section solid                                              | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section solid                                              | 1.5 mm <sup>2</sup>                                                                              | 4.0 mm <sup>2</sup>                                                                               | 6.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section fine stranded                                      | 0.08 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section fine stranded                                      | 1.5 mm <sup>2</sup>                                                                              | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.25 mm <sup>2</sup>                                                                               |
|                                | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
| Dimensions                     |                                                                                    | 3.5 × 63.2 × 30.5                                                                                | 5.2 × 72.2 × 35.3                                                                                 | 6.2 × 76.9 × 35.3                                                                                  |
| IEC rated voltage              |                                                                                    | 500 V                                                                                            | 800 V                                                                                             |                                                                                                    |
| IEC rated current              |                                                                                    | 17.5 A/1.5 mm <sup>2</sup>                                                                       | 24 A/2.5 mm <sup>2</sup>                                                                          | 32 A/4.0 mm <sup>2</sup>                                                                           |
| Usage Group (UG)               |                                                                                    | B, C                                                                                             | D                                                                                                 | B, C                                                                                               |
| UL rated voltage               |                                                                                    | 300 V                                                                                            | 51-150 V<br>151-300 V<br>301-600 V                                                                | 600 V                                                                                              |
| UL rated current               |                                                                                    | 15 A/AWG14 (SOL)<br>10 A/AWG16                                                                   | 15 A/AWG14 (SOL)<br>10 A/AWG16<br>10 A/AWG16<br>5 A/AWG16-20                                      | 20 A/AWG12 (SOL),<br>15 A/AWG14<br>30 A/AWG10 (SOL),<br>20 A/AWG12                                 |
| Dielectric strength            |                                                                                    | 1,890 VAC for 1 min<br>(leakage current: 1 mA max.)                                              | 2,000 VAC for 1 min<br>(leakage current: 1 mA max.)                                               |                                                                                                    |
| End Cover                      |                                                                                    | XW5E-P1.5-2.2-1                                                                                  | XW5E-P2.5-2.2-1                                                                                   | XW5E-P4.0-2.2-1                                                                                    |
| Special tool                   |                                                                                    | XW4Z-00B                                                                                         |                                                                                                   |                                                                                                    |
| Applicable nameplates          |                                                                                    | XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness          | XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness           | XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness            |
| Applicable Short Bars          |                                                                                    | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                     | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                      | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                       |

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.

\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.

## Grounding Terminal blocks Standard terminals




| Model                          |                                                                                    | XW5G-P1.5-1.1-1                                                                                  | XW5G-P2.5-1.1-1                                                                                   | XW5G-P4.0-1.1-1                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Appearance and internal wiring |                                                                                    | 1 tier, 1:1<br> | 1 tier, 1:1<br> | 1 tier, 1:1<br> |
|                                |                                                                                    |                                                                                                  |                                                                                                   |                                                                                                    |
|                                |                                                                                    |                                                                                                  |                                                                                                   |                                                                                                    |
| Applicable wire sizes*1        | NOMINAL CROSS SECTION                                                              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4 mm <sup>2</sup>                                                                                  |
|                                | Minimum conductor cross section solid                                              | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section solid                                              | 1.5 mm <sup>2</sup>                                                                              | 4.0 mm <sup>2</sup>                                                                               | 6.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section fine stranded                                      | 0.08 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section fine stranded                                      | 1.5 mm <sup>2</sup>                                                                              | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.25 mm <sup>2</sup>                                                                               |
|                                | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
| Dimensions                     |                                                                                    | 3.5 × 45 × 30.5                                                                                  | 5.2 × 48.8 × 35.3                                                                                 | 6.2 × 56.1 × 35.3                                                                                  |
| IEC rated voltage              |                                                                                    | 500 V                                                                                            | 800 V                                                                                             |                                                                                                    |
| UL rated voltage               |                                                                                    | 600 V                                                                                            |                                                                                                   |                                                                                                    |
| Dielectric strength            |                                                                                    | 1,890 VAC for 1 min<br>(leakage current: 1 mA max.)                                              | 2,000 VAC for 1 min<br>(leakage current: 1 mA max.)                                               |                                                                                                    |
| End Cover                      |                                                                                    | XW5E-P1.5-1.1-1                                                                                  | XW5E-P2.5-1.1-1                                                                                   | XW5E-P4.0-1.1-1                                                                                    |
| Special tool                   |                                                                                    | XW4Z-00B                                                                                         |                                                                                                   |                                                                                                    |
| Applicable nameplates          |                                                                                    | XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness          | XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness           | XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness            |
| Applicable Short Bars          |                                                                                    | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                     | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                      | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                       |

**Note:** If you use a Grounding Terminal Block, use a DIN Track for grounding.

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.

\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.

## Grounding Terminal blocks Multi tiers terminal




| Model                          |                                                                                    | XW5G-P1.5-1.1-2                                                                                   | XW5G-P2.5-1.1-2                                                                                    | XW5G-P4.0-1.1-2                                                                                     |
|--------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Appearance and internal wiring |                                                                                    | 2 tiers, 1:1<br> | 2 tiers, 1:1<br> | 2 tiers, 1:1<br> |
|                                |                                                                                    |                                                                                                   |                                                                                                    |                                                                                                     |
| Applicable wire sizes*1        | NOMINAL CROSS SECTION                                                              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                     | 2.5 mm <sup>2</sup>                                                                                | 4.0 mm <sup>2</sup>                                                                                 |
|                                | Minimum conductor cross section solid                                              | 0.14 mm <sup>2</sup>                                                                              | 0.14 mm <sup>2</sup>                                                                               | 0.2 mm <sup>2</sup>                                                                                 |
|                                | Maximum conductor cross section solid                                              | 1.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                | 6.0 mm <sup>2</sup>                                                                                 |
|                                | Minimum conductor cross section fine stranded                                      | 0.08 mm <sup>2</sup>                                                                              | 0.14 mm <sup>2</sup>                                                                               | 0.2 mm <sup>2</sup>                                                                                 |
|                                | Maximum conductor cross section fine stranded                                      | 1.5 mm <sup>2</sup>                                                                               | 2.5 mm <sup>2</sup>                                                                                | 4.0 mm <sup>2</sup>                                                                                 |
|                                | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 0.14 mm <sup>2</sup>                                                                              | 0.14 mm <sup>2</sup>                                                                               | 0.25 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                     | 2.5 mm <sup>2</sup>                                                                                | 4.0 mm <sup>2</sup>                                                                                 |
| Dimensions                     |                                                                                    | 3.5 × 65.7 × 41.1                                                                                 | 5.2 × 78.8 × 45.9                                                                                  | 6.2 × 85 × 45.9                                                                                     |
| IEC rated voltage              |                                                                                    | 500 V                                                                                             |                                                                                                    |                                                                                                     |
| UL rated voltage               |                                                                                    | 600 V                                                                                             |                                                                                                    |                                                                                                     |
| Dielectric strength            |                                                                                    | 1,890 VAC for 1 min<br>(leakage current: 1 mA max.)                                               | 2,000 VAC for 1 min<br>(leakage current: 1 mA max.)                                                |                                                                                                     |
| End Cover                      |                                                                                    | XW5E-P1.5-1.1-2                                                                                   | XW5E-P2.5-1.1-2                                                                                    | XW5E-P4.0-1.1-2                                                                                     |
| Special tool                   |                                                                                    | XW4Z-00B                                                                                          |                                                                                                    |                                                                                                     |
| Applicable nameplates          |                                                                                    | XW5Z-P1.5LB2                                                                                      | XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness            | XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness             |
| Applicable Short Bars          |                                                                                    | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                      | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                       | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                        |

**Note:** If you use a Grounding Terminal Block, use a DIN Track for grounding.

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.

\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.




## Grounding Terminal blocks Multi conductor terminals

| Model                          |                                                                                    | XW5G-P1.5-1.2-1                                                                                  | XW5G-P2.5-1.2-1                                                                                   | XW5G-P4.0-1.2-1                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Appearance and internal wiring |                                                                                    | 1 tier, 1:2<br> | 1 tier, 1:2<br> | 1 tier, 1:2<br> |
| Applicable wire sizes*1        | NOMINAL CROSS SECTION                                                              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section solid                                              | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section solid                                              | 1.5 mm <sup>2</sup>                                                                              | 4.0 mm <sup>2</sup>                                                                               | 6.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section fine stranded                                      | 0.08 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section fine stranded                                      | 1.5 mm <sup>2</sup>                                                                              | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.25 mm <sup>2</sup>                                                                               |
|                                | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
| Dimensions                     |                                                                                    | 3.5 × 54.1 × 30.5                                                                                | 5.2 × 60.5 × 35.3                                                                                 | 6.2 × 66.5 × 35.3                                                                                  |
| IEC rated voltage              |                                                                                    | 500 V                                                                                            | 800 V                                                                                             |                                                                                                    |
| UL rated voltage               |                                                                                    | 600 V                                                                                            | 600 V                                                                                             |                                                                                                    |
| Dielectric strength            |                                                                                    | 1,890 VAC for 1 min (leakage current: 1 mA max.)                                                 | 2,000 VAC for 1 min (leakage current: 1 mA max.)                                                  |                                                                                                    |
| End Cover                      |                                                                                    | XW5E-P1.5-1.2-1                                                                                  | XW5E-P2.5-1.2-1                                                                                   | XW5E-P4.0-1.2-1                                                                                    |
| Special tool                   |                                                                                    | XW4Z-00B                                                                                         |                                                                                                   |                                                                                                    |
| Applicable nameplates          |                                                                                    | XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness          | XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness           | XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness            |
| Applicable Short Bars          |                                                                                    | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                     | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                      | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                       |

**Note:** If you use a Grounding Terminal Block, use a DIN Track for grounding.

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.

\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.

| Model                          |                                                                                    | XW5G-P1.5-2.2-1                                                                                  | XW5G-P2.5-2.2-1                                                                                   | XW5G-P4.0-2.2-1                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Appearance and internal wiring |                                                                                    | 1 tier, 2:2<br> | 1 tier, 2:2<br> | 1 tier, 2:2<br> |
|                                |                                                                                    |                                                                                                  |                                                                                                   |                                                                                                    |
| Applicable wire sizes*1        | NOMINAL CROSS SECTION                                                              | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section solid                                              | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section solid                                              | 1.5 mm <sup>2</sup>                                                                              | 4.0 mm <sup>2</sup>                                                                               | 6.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section fine stranded                                      | 0.08 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.2 mm <sup>2</sup>                                                                                |
|                                | Maximum conductor cross section fine stranded                                      | 1.5 mm <sup>2</sup>                                                                              | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
|                                | Minimum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 0.14 mm <sup>2</sup>                                                                             | 0.14 mm <sup>2</sup>                                                                              | 0.25 mm <sup>2</sup>                                                                               |
|                                | Maximum conductor cross section (flex., stranded) with ferrule with Plastic sleeve | 1.0 mm <sup>2</sup> (1.25 mm <sup>2</sup> )*2                                                    | 2.5 mm <sup>2</sup>                                                                               | 4.0 mm <sup>2</sup>                                                                                |
| Dimensions                     |                                                                                    | 3.5 × 63.2 × 30.5                                                                                | 5.2 × 72.2 × 35.3                                                                                 | 6.2 × 76.9 × 35.3                                                                                  |
| IEC rated voltage              |                                                                                    | 500 V                                                                                            | 800 V                                                                                             |                                                                                                    |
| UL rated voltage               |                                                                                    | 600 V                                                                                            |                                                                                                   |                                                                                                    |
| Dielectric strength            |                                                                                    | 1,890 VAC for 1 min<br>(leakage current: 1 mA max.)                                              | 2,000 VAC for 1 min<br>(leakage current: 1 mA max.)                                               |                                                                                                    |
| End Cover                      |                                                                                    | XW5E-P1.5-2.2-1                                                                                  | XW5E-P2.5-2.2-1                                                                                   | XW5E-P4.0-2.2-1                                                                                    |
| Special tool                   |                                                                                    | XW4Z-00B                                                                                         |                                                                                                   |                                                                                                    |
| Applicable nameplates          |                                                                                    | XW5S-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness          | XW5S-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness           | XW5S-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness            |
| Applicable Short Bars          |                                                                                    | XW5S-P1.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                     | XW5S-P2.5-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                      | XW5S-P4.0-□<br>(□: Poles = 2, 3, 4, 5 or 10)                                                       |

**Note:** If you use a Grounding Terminal Block, use a DIN Track for grounding.

\*1. For the applicable wire ranges, refer to page 17 for solid and stranded wires and to page 19 for ferrules.

\*2. You can also use 1.25 mm<sup>2</sup> wires if you use 1.0 mm<sup>2</sup> ferrules. However, if you do, care is required in the finished outer shape of the wires.

## Performance

|                           |                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------|
| Operating temperature     | −40 to 55°C (with no condensation or icing)                                                 |
| Operating humidity        | 5% to 95%                                                                                   |
| Insulating material       | PA resin                                                                                    |
| Fire resistance           | UL94 V-0                                                                                    |
| Insertion durability      | 50 times                                                                                    |
| Vibration resistance      | 10 to 150 Hz, Acceleration of 50 m/s <sup>2</sup> for 80 min each in X, Y, and Z directions |
| Shock resistance          | 500 m/s <sup>2</sup> for 11 ms each in 6 directions 5 times                                 |
| Storage Temperature Range | −40 to 85°C (with no condensation or icing)                                                 |
| Storage Humidity Range    | 5% to 95%                                                                                   |

## Short Bars

| Model         | XW5S-P1.5-□ | XW5S-P2.5-□ | XW5S-P4.0-□ |
|---------------|-------------|-------------|-------------|
| Rated voltage | 500 V       | 800 V       |             |
| Rated current | 17.5 A      | 24 A        | 32 A        |

## Certification

### Applicable Safety Standards

cURus (UL 1059/CSA C22.2 No. 158)

### Certification


cURus (file No. E245101)




Dimensions

DIN Track Terminal Blocks


XW5T-P1.5-1.1-1 (BL)/XW5G-P1.5-1.1-1

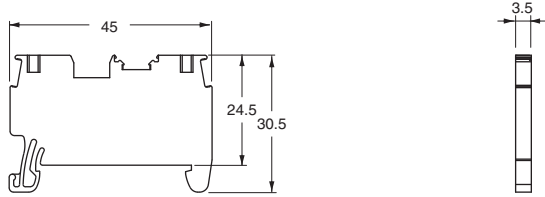


XW5T-P1.5-1.2-1 (BL)/XW5G-P1.5-1.2-1

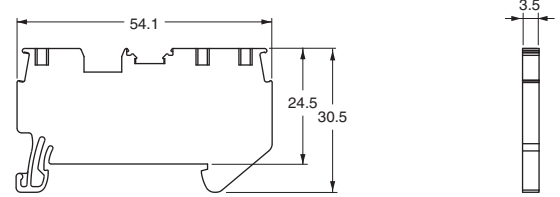


XW5T-P1.5-2.2-1 (BL)/XW5G-P1.5-2.2-1

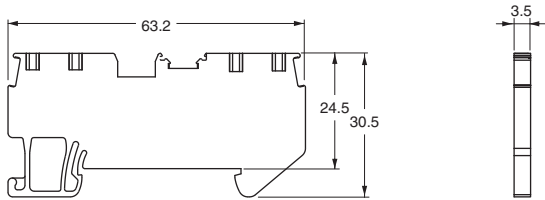


XW5T-P1.5-1.1-2 (BL)/XW5G-P1.5-1.1-2

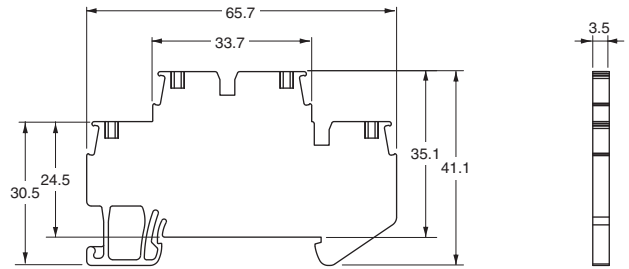


XW5T-P2.5-1.1-1 (BL)/XW5G-P2.5-1.1-1

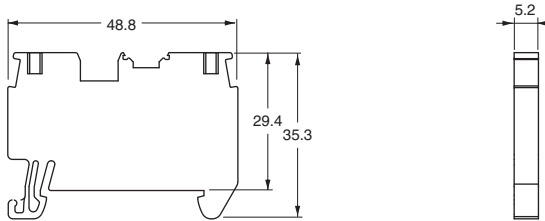


XW5T-P2.5-1.2-1 (BL)/XW5G-P2.5-1.2-1

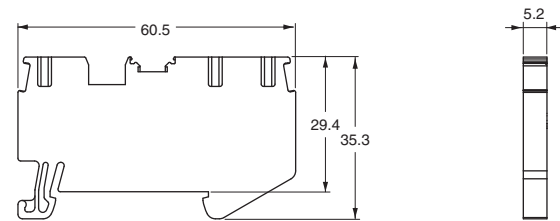


XW5T-P2.5-2.2-1 (BL)/XW5G-P2.5-2.2-1

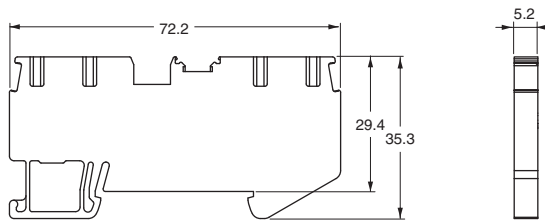


XW5T-P2.5-1.1-2 (BL)/XW5G-P2.5-1.1-2

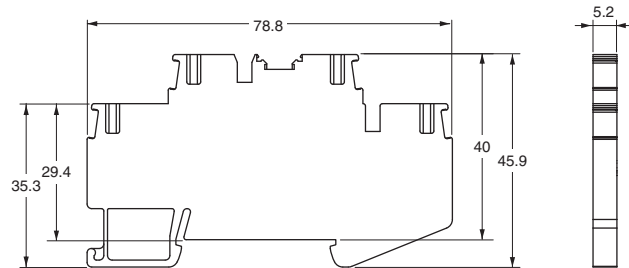


**XW5T-P4.0-1.1-1 (BL)/XW5G-P4.0-1.1-1**

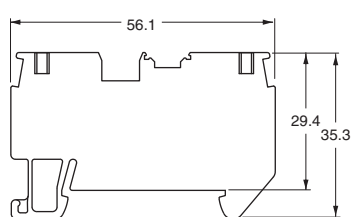


**XW5T-P4.0-1.2-1 (BL)/XW5G-P4.0-1.2-1**

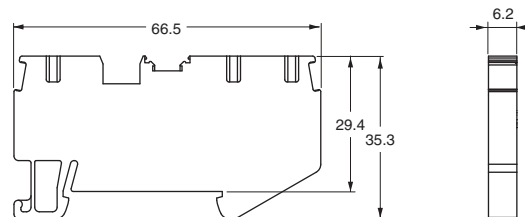

**XW5T-P4.0-2.2-1 (BL)/XW5G-P4.0-2.2-1**

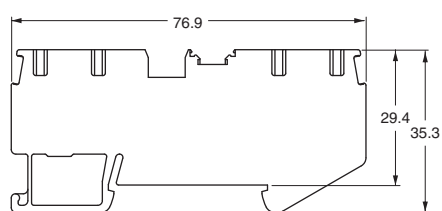


**XW5T-P4.0-1.1-2 (BL)/XW5G-P4.0-1.1-2**

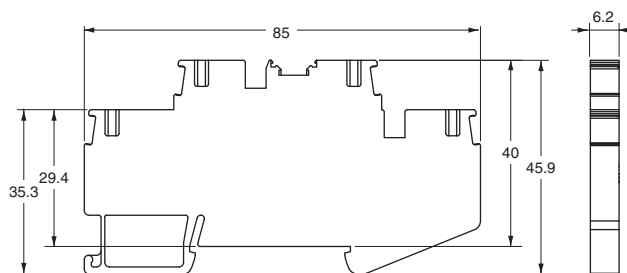


## Short Bars

**XW5S-P1.5-□**

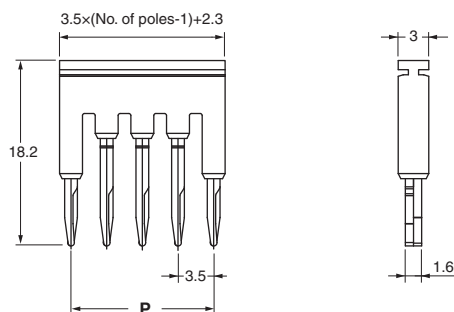


| Model         | P (mm) |
|---------------|--------|
| XW5S-P1.5-2□  | 3.5    |
| XW5S-P1.5-3□  | 7.0    |
| XW5S-P1.5-4□  | 10.5   |
| XW5S-P1.5-5□  | 14.0   |
| XW5S-P1.5-10□ | 31.5   |

**XW5S-P2.5-□**

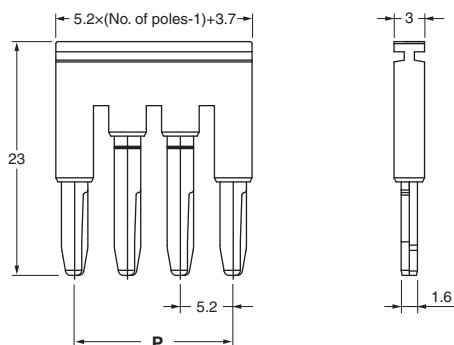

| Model         | P (mm) |
|---------------|--------|
| XW5S-P2.5-2□  | 5.2    |
| XW5S-P2.5-3□  | 10.4   |
| XW5S-P2.5-4□  | 15.6   |
| XW5S-P2.5-5□  | 20.8   |
| XW5S-P2.5-10□ | 46.8   |


**XW5S-P4.0-□**

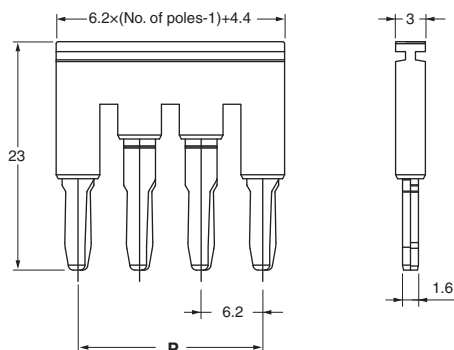


| Model         | P (mm) |
|---------------|--------|
| XW5S-P4.0-2□  | 6.2    |
| XW5S-P4.0-3□  | 12.4   |
| XW5S-P4.0-4□  | 18.6   |
| XW5S-P4.0-5□  | 24.8   |
| XW5S-P4.0-10□ | 55.8   |

End Cover


XW5E-P1.5-1.1-1

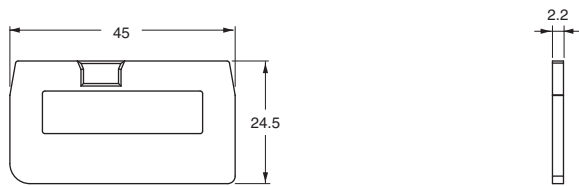


XW5E-P1.5-1.2-1

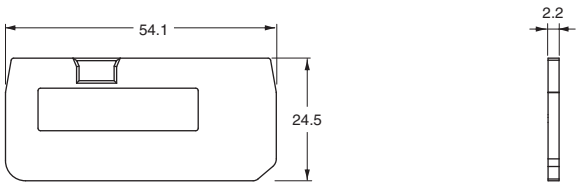


XW5E-P1.5-2.2-1

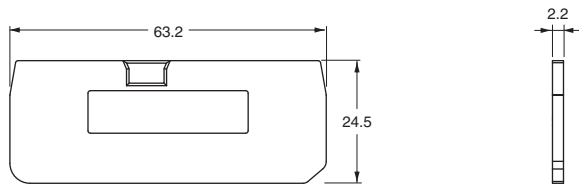


XW5E-P1.5-1.1-2

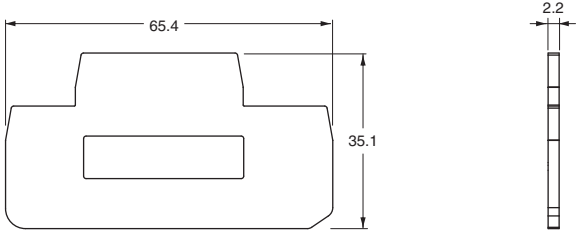


XW5E-P2.5-1.1-1

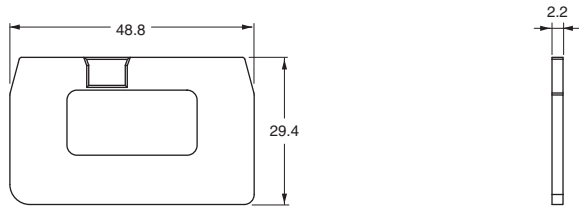


XW5E-P2.5-1.2-1

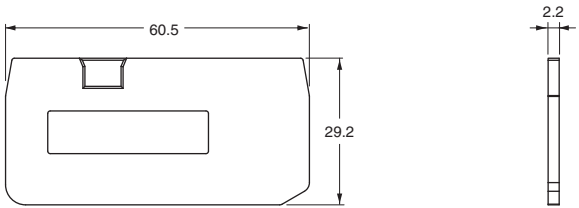


XW5E-P2.5-2.2-1

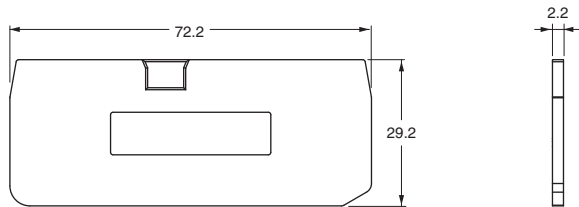


XW5E-P2.5-1.1-2

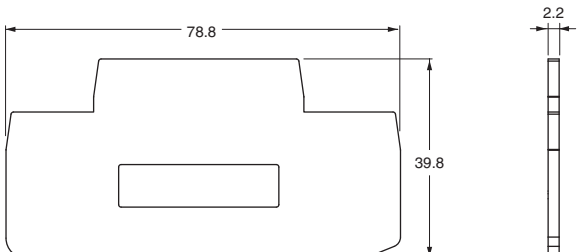


XW5E-P4.0-1.1-1

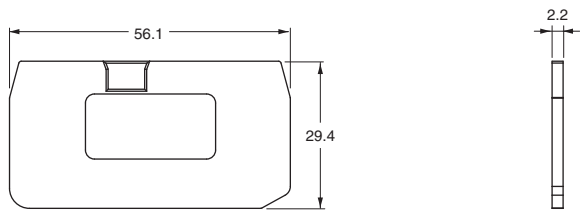


XW5E-P4.0-1.2-1

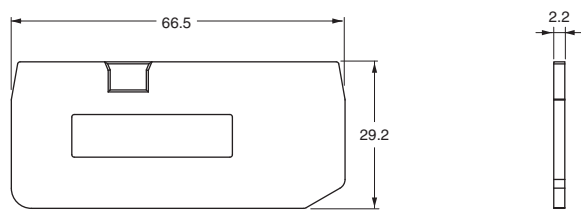

XW5E-P4.0-2.2-1

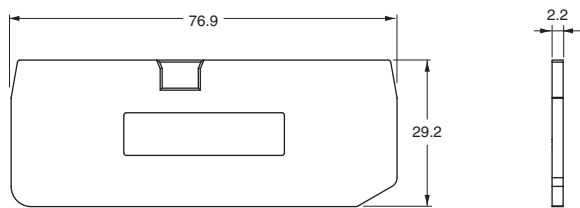


XW5E-P4.0-1.1-2

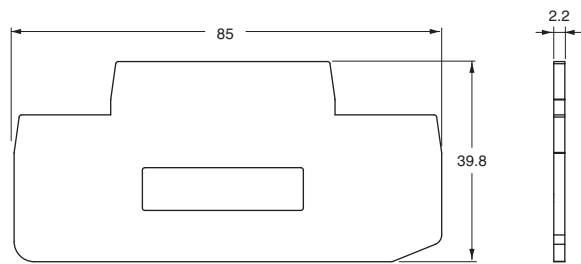


End Brackets/Separator Plates

XW5Z-EP6 (End Brackets)

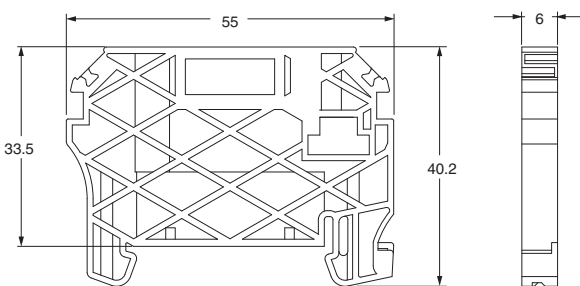

XW5Z-EP12 (Separator Plates)

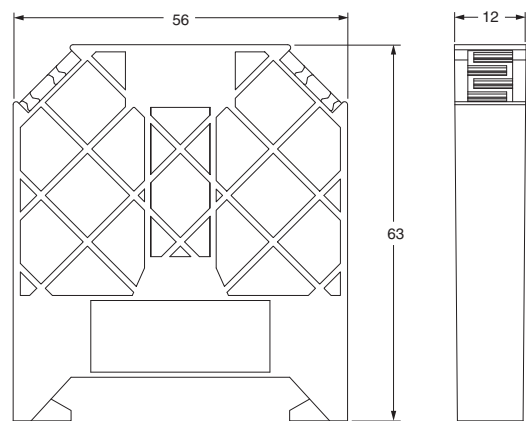

## Safety Precautions

### Warning Indications

|                                    |                                                                                                                                                 |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Precautions for Safe Use</b>    | Supplementary comments on what to do or avoid doing, to use the product safely.                                                                 |
| <b>Precautions for Correct Use</b> | Supplementary comments on what to do or avoid doing, to prevent failure to operate, malfunction, or undesirable effects on product performance. |

### Precautions for Safe Use

- Do not drop the Terminal Block.  
Terminal Block functionality may be inhibited.
- Do not exceed the ratings. Doing so may damage or burn out the Terminal Block.
- Mount the Terminal Blocks on a DIN Track and secure both ends with Stoppers.
- Do not use the Terminal Block in locations where toxic gases, such as H<sub>2</sub>S, SO<sub>2</sub>, NH<sub>3</sub>, HNO<sub>3</sub>, and Cl<sub>2</sub>, may be present, or in locations subject to high temperature or humidity. Doing so may damage the Terminal Block due to contact failure or corrosion.
- Do not use the Terminal Block submersed in oil or water, or in locations continuously subject to splashes of oil or water. Doing so may result in oil or water entering and damaging the Terminal Block.
- Do not use or keep the Terminal Block under the following conditions:
  - Subject to severe temperature changes.
  - Subject to high humidity or condensation.
  - Subject to severe vibration or shock.
  - Where direct rays of the sun strike.
  - Where sea breeze may be present.
- Do not wire anything to the release holes.
- Do not tilt or twist a flat-blade screwdriver while it is inserted into a release hole on the terminal block. The terminal block may be damaged.
- Insert a flat-blade screwdriver into the release holes at an angle. The terminal block may be damaged if you insert the screwdriver straight in.
- Do not allow the flat-blade screwdriver to fall out while it is inserted into a release hole.
- Do not bend a wire past its natural bending radius or pull on it with excessive force.  
Doing so may cause the wire disconnection. Do not place excessive force on a Terminal Block. Doing so may damage or deform the Terminal Block and result in contact failure.
- Do not insert more than one wire into each terminal insertion hole.
- If you mount more than one Terminal Block, mount them so that the conductive parts of adjacent Terminal Blocks are facing in the same direction. If they face in different directions, short circuits may occur between adjacent Terminal Blocks.
- To prevent wire materials from smoking or igniting, confirm wire ratings and use the wiring materials given in the following table.

|                            | Recommended Wire                              |                                               | Stripping length<br>(Without Ferrules) |
|----------------------------|-----------------------------------------------|-----------------------------------------------|----------------------------------------|
|                            | Solid                                         | Stranded                                      |                                        |
| XW5T-P1.5-□<br>XW5G-P1.5-□ | 0.14 to 1.5 mm <sup>2</sup> /<br>AWG 26 to 14 | 0.14 to 1.5 mm <sup>2</sup> /<br>AWG 28 to 16 | 8 mm                                   |
| XW5T-P2.5-□<br>XW5G-P2.5-□ | 0.14 to 4.0 mm <sup>2</sup> /<br>AWG 26 to 12 | 0.14 to 2.5 mm <sup>2</sup> /<br>AWG 26 to 14 | 10 mm                                  |
| XW5T-P4.0-□<br>XW5G-P4.0-□ | 0.25 to 6.0 mm <sup>2</sup> /<br>AWG 24 to 10 | 0.25 to 4.0 mm <sup>2</sup> /<br>AWG 24 to 12 | 12 mm                                  |

### Precautions for Correct Use

#### 1. Precautions for Correct Use


- Always mount End Covers to the following locations when you use Terminal Blocks.
  - Exposed metal surface of the last Terminal Block
  - Any Terminal Block that is next to a different shape of Terminal Block

There is a risk of electric shock if End Covers are not used.

- When you wire the Terminal Block, do not subject it or the wires to stress. Secure the wires so that they do not resonate with vibrations from the facilities in installation conditions.
- Always turn OFF the power supply before wiring. Electrical shock may occur.

#### 2. Connecting Wires to the Push-In Plus Terminal Block


##### Part Names of the Terminal Block

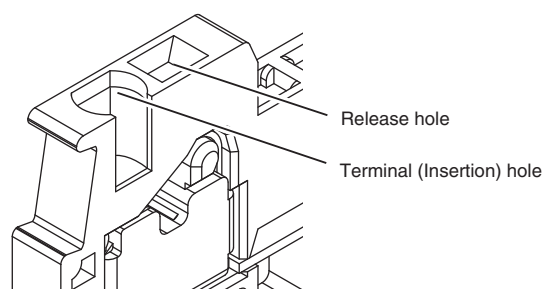

##### Connecting Wires with Ferrules and Solid Wires

Insert the solid wire or ferrule straight into the terminal block until the end strikes the terminal block.


If a wire is difficult to connect because it is too thin, use a flat-blade screwdriver in the same way as when connecting stranded wire.

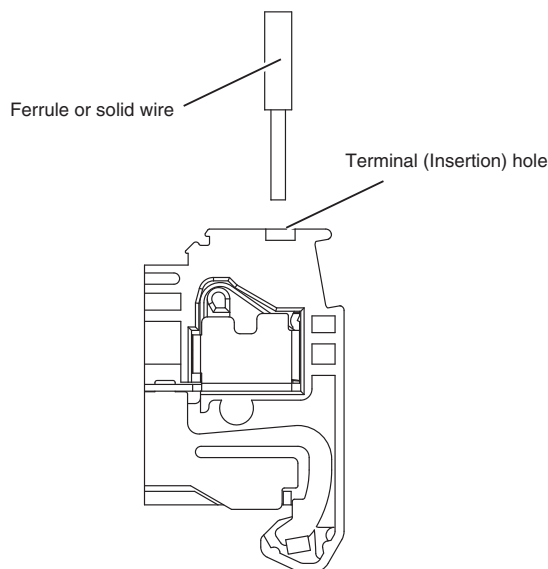

## Connecting Stranded Wires

Use the following procedure to connect the wires to the terminal block.

1. Hold a flat-blade screwdriver at an angle and insert it into the release hole. The angle should be between 10° and 15°. If the flat-blade screwdriver is inserted correctly, you will feel the spring in the release hole respond.
2. With the flat-blade screwdriver still inserted into the release hole, insert the wire into the terminal hole until it strikes the terminal block.
3. Remove the flat-blade screwdriver from the release hole.

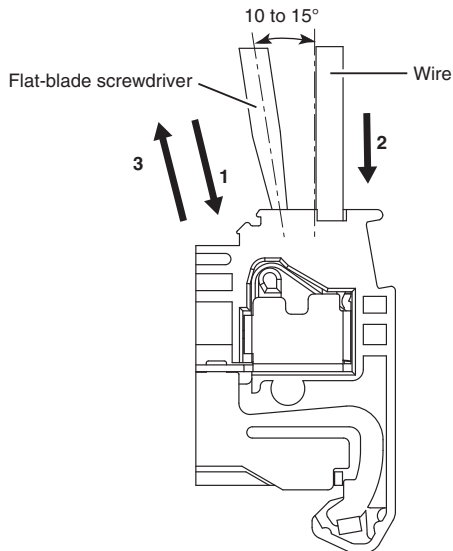


## Checking Connections

- After the insertion, pull gently on the wire to make sure that it will not come off and the wire is securely fastened to the terminal block.
- If you use a ferrule with a conductor length of 10 mm, part of the conductor may be visible after the ferrule is inserted into the terminal block, but the product insulation distance will still be satisfied.

## 3. Removing Wires from the Push-In Plus Terminal Block

Use the following procedure to remove wires from the terminal block. The same method is used to remove stranded wires, solid wires, and ferrules.

1. Hold a flat-blade screwdriver at an angle and insert it into the release hole.
2. With the flat-blade screwdriver still inserted into the release hole, remove the wire from the terminal insertion hole.
3. Remove the flat-blade screwdriver from the release hole.

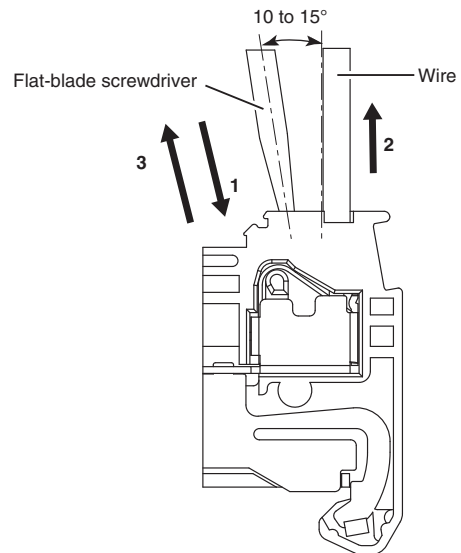

## 4. Recommended Ferrules and Crimp Tools


### Recommended ferrules

#### XW5T-P1.5-□-□□/XW5G-□P1.5-□-□□

| Applicable wire        |       | Ferrule Conductor length (mm) | Stripping length (mm)<br>(Ferrules used) | Recommended ferrules                    |                            |                      |
|------------------------|-------|-------------------------------|------------------------------------------|-----------------------------------------|----------------------------|----------------------|
| (mm²)                  | (AWG) |                               |                                          | Manufactured by Phoenix Contact         | Manufactured by Weidmuller | Manufactured by Wago |
| 0.14                   | 26    | 8                             | 10                                       | Al 0,14-8                               | H0.14/12                   | ---                  |
| 0.25                   | 24    | 8                             | 10                                       | Al 0,25-8                               | H0.25/12                   | FE-0.25-8N-YE        |
|                        |       | 10                            | 12                                       | Al 0,25-10                              | ---                        | ---                  |
| 0.34                   | 22    | 8                             | 10                                       | Al 0,34-8                               | H0.34/12                   | FE-0.34-8N-TQ        |
|                        |       | 10                            | 12                                       | Al 0,34-10                              | ---                        | ---                  |
| 0.50                   | 20    | 8                             | 10                                       | Al 0,5-8                                | H0.5/14                    | FE-0.5-8N-WH         |
|                        |       | 10                            | 12                                       | Al 0,5-10                               | H0.5/16                    | FE-0.5-10N-WH        |
| 0.75                   | 18    | 8                             | 10                                       | Al 0,75-8                               | H0.75/14                   | FE-0.75-8N-GY        |
|                        |       | 10                            | 12                                       | Al 0,75-10                              | H0.75/16                   | FE-0.75-10N-GY       |
| 1/1.25                 | 18/17 | 8                             | 10                                       | Al 1-8                                  | H1.0/14                    | FE-1.0-8N-RD         |
|                        |       | 10                            | 12                                       | Al 1-10                                 | H1.0/16                    | FE-1.0-10N-RD        |
| Recommended crimp tool |       |                               |                                          | CRIMPFOX6<br>CRIMPFOX6-F<br>CRIMPFOX10S | PZ6 roto                   | Variocrimp4          |

- Note:** 1. Make sure that the outer diameter of the wire is smaller than the inner diameter of the insulation sleeve of the recommended ferrule.  
2. Make sure that the ferrule processing dimensions conform to the following figure.

Ferrule Processed Dimensions




#### XW5T-P2.5-□-□□/XW5G-□P2.5-□-□□

| Applicable wire        |       | Ferrule Conductor length (mm) | Stripping length (mm) (Ferrules used) | Recommended ferrules                    |                            |                      |
|------------------------|-------|-------------------------------|---------------------------------------|-----------------------------------------|----------------------------|----------------------|
| (mm <sup>2</sup> )     | (AWG) |                               |                                       | Manufactured by Phoenix Contact         | Manufactured by Weidmuller | Manufactured by Wago |
| 0.14                   | 26    | 8                             | 10                                    | Al 0,14-8                               | H0.14/12                   | ---                  |
| 0.25                   | 24    | 8                             | 10                                    | Al 0,25-8                               | H0.25/12                   | FE-0.25-8N-YE        |
|                        |       | 10                            | 12                                    | Al 0,25-10                              | ---                        | ---                  |
| 0.34                   | 22    | 8                             | 10                                    | Al 0,34-8                               | H0.34/12                   | FE-0.34-8N-TQ        |
|                        |       | 10                            | 12                                    | Al 0,34-10                              | ---                        | ---                  |
| 0.50                   | 20    | 8                             | 10                                    | Al 0,5-8                                | H0.5/14                    | FE-0.5-8N-WH         |
|                        |       | 10                            | 12                                    | Al 0,5-10                               | H0.5/16                    | FE-0.5-10N-WH        |
| 0.75                   | 18    | 8                             | 10                                    | Al 0,75-8                               | H0.75/14                   | FE-0.75-8N-GY        |
|                        |       | 10                            | 12                                    | Al 0,75-10                              | H0.75/16                   | FE-0.75-10N-GY       |
| 1/1.25                 | 18/17 | 8                             | 10                                    | Al 1-8                                  | H1.0/14                    | FE-1.0-8N-RD         |
|                        |       | 10                            | 12                                    | Al 1-10                                 | H1.0/16                    | FE-1.0-10N-RD        |
| 1.25/1.5               | 17/16 | 8                             | 10                                    | Al 1,5-8                                | H1.5/14                    | FE-1.5-8N-BK         |
|                        |       | 10                            | 12                                    | Al 1,5-10                               | H1.5/16                    | FE-1.5-10N-BK        |
| 2.5                    | 14    | 10                            | 12                                    | Al 2,5-10                               | H2.5/16DS                  | FE-2.5-10N-BU        |
| Recommended crimp tool |       |                               |                                       | CRIMPFOX6<br>CRIMPFOX6-F<br>CRIMPFOX10S | PZ6 roto                   | Variocrimp4          |

- Note:** 1. Make sure that the outer diameter of the wire is smaller than the inner diameter of the insulation sleeve of the recommended ferrule.  
2. Make sure that the ferrule processing dimensions conform to the following figure.

Ferrule Processed Dimensions




#### XW5T-P4.0-□-□□/XW5G-□P4.0-□-□□

| Applicable wire        |       | Ferrule<br>Conductor<br>length<br>(mm) | Stripping<br>length<br>(mm)<br>(Ferrules used) | Recommended ferrules                    |                               |                         |
|------------------------|-------|----------------------------------------|------------------------------------------------|-----------------------------------------|-------------------------------|-------------------------|
| (mm²)                  | (AWG) |                                        |                                                | Manufactured by<br>Phoenix Contact      | Manufactured by<br>Weidmuller | Manufactured by<br>Wago |
| 0.25                   | 24    | 12                                     | 14                                             | Al 0,25-12                              | ---                           | ---                     |
| 0.34                   | 22    |                                        |                                                | Al 0,34-12                              | ---                           | ---                     |
| 0.50                   | 20    |                                        |                                                | Al 0,5-12                               | ---                           | FE-0.5-12N-WH           |
| 1/1.25                 | 18/17 |                                        |                                                | Al 0,75-21                              | H0.75/18                      | FE-0.75-12N-GY          |
| 1.25/1.5               | 17/16 |                                        |                                                | Al 1-12                                 | H1.0/18                       | FE-1.0-12N-RD           |
| 1.5                    | 16    |                                        |                                                | Al 1,5-12                               | H1.5/18D                      | FE-1.5-12N-BK           |
| 2.5                    | 14    |                                        |                                                | Al 2,5-12                               | H2.5/19D                      | FE-2.5-12N-BU           |
| 4                      | 12    |                                        |                                                | Al 4-12                                 | H4.0/20D                      | FE-4.0-12N-GY           |
| Recommended crimp tool |       |                                        |                                                | CRIMPFOX6<br>CRIMPFOX6-F<br>CRIMPFOX10S | PZ6 roto                      | Variocrimp4             |

- Note:** 1. Make sure that the outer diameter of the wire is smaller than the inner diameter of the insulation sleeve of the recommended ferrule.  
2. Make sure that the ferrule processing dimensions conform to the following figure.

Ferrule Processed Dimensions




### Recommended Flat-blade Screwdriver

Use a flat-blade screwdriver to connect and remove wires.

Use the following flat-blade screwdriver.

The following table shows manufacturers and models as of 2015/Dec.

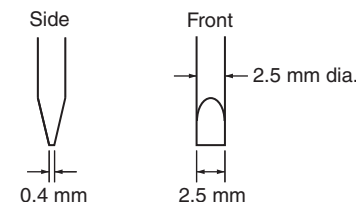

| Model                         | Manufacturer    |
|-------------------------------|-----------------|
| ESD0.40×2.5                   | Wera            |
| SZS 0.4×2.5<br>SZF 0-0.4×2.5* | Phoenix Contact |
| 0.4×2.5×75 302                | Wiha            |
| AEF.2.5×75                    | Facom           |
| 210-719                       | Wago            |
| SDI 0.4×2.5×75                | Weidmuller      |

\* You can order Phenix Contact SZF 0-0.4×2.5 Screwdrivers with OMRON model number XW4Z-00B.

Equivalent Labels from Other Companies and Recommended Label Printers


Use the following label printer.  
The following table gives the manufacturer's model number as of March 2017.

| Manufacturer  | Omron                                                 | Phoenix Contact                                       | Weidmuller                                             | Cembre           |
|---------------|-------------------------------------------------------|-------------------------------------------------------|--------------------------------------------------------|------------------|
| Label         | XW5Z-P1.5LB1                                          | UCT-TM3,5                                             | NA                                                     | MG-CPM-40 41392  |
|               | XW5Z-P2.5LB1                                          | UCT-TM5                                               | MF 8/5                                                 | MG-CPM-04 41390N |
|               |                                                       |                                                       | MF 10/5                                                |                  |
|               |                                                       |                                                       | MF 12/5                                                |                  |
|               | XW5Z-P4.0LB1                                          | UCT-TM6                                               | MF 10/6                                                | MG-CPM-04 41391  |
|               | XW5Z-P1.5LB2                                          | UCT-TMF3,5                                            | ---                                                    | ---              |
| Label printer | XW5Z-P2.5LB2                                          | UCT-TMF5                                              | ---                                                    | ---              |
|               | XW5Z-P4.0LB2                                          | UCT-TMF6                                              | ---                                                    | ---              |
|               | BLUEMARK CLED, THERMOMA KR CARD PLUS, THERMOMA RK CAD | BLUEMARK CLED, THERMOMA KR CARD PLUS, THERMOMA RK CAD | PrintJet ADVANCED, Plotter MCP Plus, Plotter MCP Basic | Markingenius MG3 |

**Note:** Ask the label manufacturer or printer manufacturer for details.


5. Mounting to DIN Track/Removing from DIN Track  
Mounting Method

To mount a Terminal Block to a DIN Track, press it against the DIN Track as shown in the following figure.



Removal Method

To remove a Terminal Block from the DIN Track, catch the tip of a screwdriver in the hook, operate the screwdriver so that the tip moves in direction (1), and then remove the Terminal Block in direction (2). However, do not apply excessive force to the Terminal Block. Doing so may damage it.

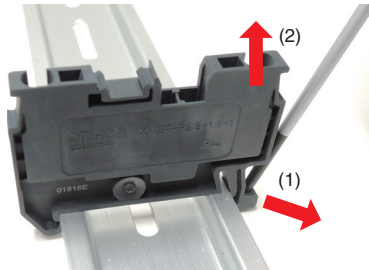


6. Using the Accessories  
Short Bars  
Mounting Method



- 1. Insert the Short Bar into the Short Bar holes.
- 2. Press the Short Bar in all of the way.

Removal Method

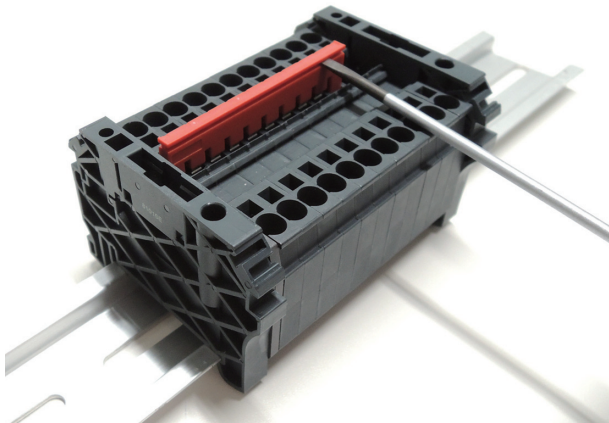


- 1. Insert the tip of a flat-blade screwdriver into the groove on the Short Bar and lift it up.
- 2. Remove the Short Bar.




## Installation

You can bend and cut off any of the middle pins with a tool when you use a Short Bar.

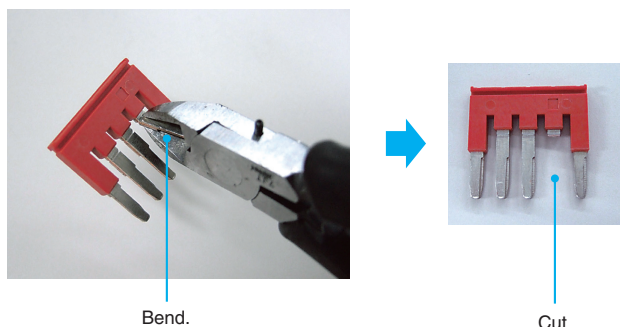

If a Short Bar that has the required pins is not available, you can combine more than one Short Bar to short the required Terminal Blocks.


For example, the following figure shows combining Four-pin and Five-pin Short Bars to short eight Terminal Blocks.



## Labels

### Mounting Method

#### Top-surface Labels





1. Remove the Labels one at a time.

2. Insert them on the tops of the Terminal Blocks.

**Note:** If multiple Terminal Blocks of the same type are used side by side, you can use multiple Labels still connected to each other.

## Side-surface Labels

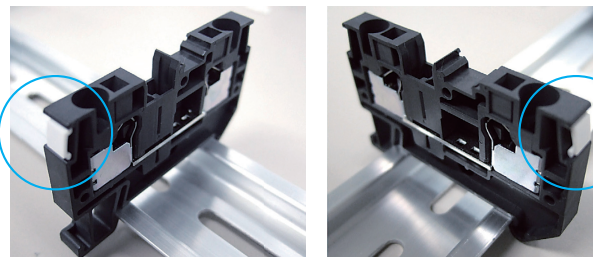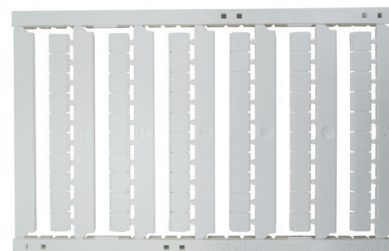

1. Remove the Labels one at a time.

2. Insert them on the sides of the Terminal Blocks.

**Note:** 1. There is no place to mount the Top-surface Labels on Two-tier Terminal Blocks with a width of 3.5 mm, so they cannot be used.


2. Different models of Labels are used for the top and side surfaces.

3. If multiple Terminal Blocks of the same type are used side by side, you can use multiple Labels still connected to each other.

## End Cover

### Mounting Method


Attach the End Cover to the side of the Terminal Block with exposed metal.

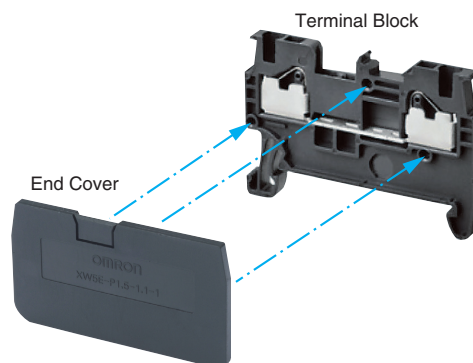

Always mount End Covers to the following locations when you use Terminal Blocks.

(1) Exposed metal surface of the last Terminal Block

(2) Any Terminal Block that is next to a different shape of Terminal Block  
There is a risk of electric shock if End Covers are not used.

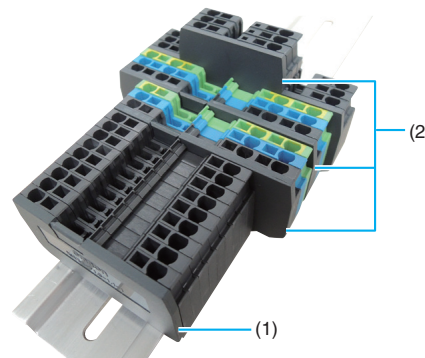

**Note:** End Brackets or Separator Plate cannot be used in place of an End Cover.

## End Brackets

### Mounting Method


The mounting and removal methods for DIN Track are the same as those for the Terminal Blocks.

## Separator Plate

### Mounting Method

Use a flat-blade screwdriver to tighten the screw in the middle of the top surface to mount the Separator Plate.

Loosen the screw to remove the Separator Plate from the DIN Track.

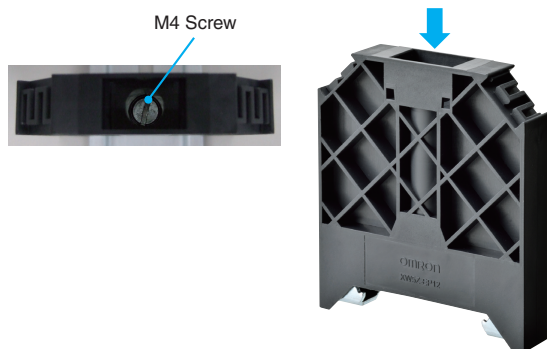

## 7. Storage

### Storage Temperature Range

–40 to 85°C with no condensation or icing

### Storage Humidity Range

5% to 95%

# Terms and Conditions Agreement

## **Read and understand this catalog.**

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## **Warranties.**

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

## **Limitation on Liability; Etc.**

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

## **Suitability of Use.**

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## **Programmable Products.**

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

## **Performance Data.**

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

## **Change in Specifications.**

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

## **Errors and Omissions.**

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

**OMRON Corporation      Industrial Automation Company**  
Kyoto, JAPAN

**Contact: [www.ia.omron.com](http://www.ia.omron.com)**

***Regional Headquarters***

**OMRON EUROPE B.V.**

Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands

Tel: (31)2356-81-300/Fax: (31)2356-81-388

**OMRON ELECTRONICS LLC**

2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.

Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON ASIA PACIFIC PTE. LTD.**

No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967

Tel: (65) 6835-3011/Fax: (65) 6835-2711

**OMRON (CHINA) CO., LTD.**

Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China

Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

**Authorized Distributor:**

© OMRON Corporation 2016-2017 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

**Cat. No. G124-E1-03**

0317(0316)