


Silicon Carbide Merged PN-Schottky Diode


650V SiC MPS High Power Rectifier – Husky Series



Product Information:



PQFN 5 x 6



TO-252-2L

Features

- Ultra-Low Forward Voltage (V_f)
- Low Profile & Low Parasitic Inductance Packaging
- Zero Reverse Recovery
- High Surge Current Capability
- Optimized for High Power Applications
- Compact MSL-1 SMT Package
- RoHS Compliant and Halogen Free

Terminal	Packaging Type	
	TO-252-2L	PQFN 5x6
Anode	2	1, 2, 3
Cathode	1, Tab	5, 6, 7, 8
N.C.	--	4

Benefits

- Higher System Efficiency
- Increase Parallel Device Convenience
- Enable High Temperature Application
- Allow High Frequency Operation
- Realize Compact and Lightweight Systems
- High Reliability

Potential Applications

- Switching Mode Power Supply
- Power Factor Correction
- Portable Adaptor
- Renewable Energy

Key Performance Parameters

Parameter	Symbol	Value	Unit
DC Blocking Voltage	V_R	650	V
Nominal Forward Current	$I_{F,NOM}$	4	A
Total Capacitive Charge	Q_C	10.6	nC
Capacitance Stored Energy	E_C	1.55	μ J
Junction & Storage Temperature	T_j, T_{stg}	-55 to 175	$^{\circ}$ C
TO-252-2L			
Continuous Forward Current	$I_{F,max(cont.)}$	11.6	A
I^2t Value	$\int i^2 dt$	1.2	A^2s
Power Dissipation	P_{tot}	34	W
PQFN 5x6			
Continuous Forward Current	$I_{F,max(cont.)}$	11.4	A
I^2t Value	$\int i^2 dt$	1.1	A^2s
Power Dissipation	P_{tot}	33	W

Part Number	Package	Marking
FH06004A	TO-252-2L	FH06004
FH06004B	PQFN 5 x 6	FH06004
--	--	--

For further information about comparable products, please contact (www.fastsic.com).

Maximum Ratings:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
TO-252-2L						
Continuous Forward Current	I_F	--	--	4 7.2 11.6	A	$T_c \leq 148^\circ\text{C}$, Duty=100% $T_c \leq 110^\circ\text{C}$, Duty=100% $T_c \leq 25^\circ\text{C}$, Duty=100%
Non-Repetitive Forward Surge Current, Sinusoidal Halfwave	$I_{F,SM}$	--	--	16		$T_c = 25^\circ\text{C}$, $t_p = 10\text{ms}$
Non-Repetitive Peak Forward Surge Current	$I_{F,max}$	--	--	169		$T_c = 25^\circ\text{C}$, $t_p = 10\mu\text{s}$
I^2t Value	$\int i^2 dt$	--	--	1.2	A ² s	$T_c = 25^\circ\text{C}$, $t_p = 10\text{ms}$
PQFN 5x6						
Continuous Forward Current	I_F	--	--	4 7 11.4	A	$T_c \leq 151^\circ\text{C}$, Duty=100% $T_c \leq 110^\circ\text{C}$, Duty=100% $T_c \leq 25^\circ\text{C}$, Duty=100%
Non-Repetitive Forward Surge Current, Sinusoidal Halfwave	$I_{F,SM}$	--	--	15		$T_c = 25^\circ\text{C}$, $t_p = 10\text{ms}$
Non-Repetitive Peak Forward Surge Current	$I_{F,max}$	--	--	154		$T_c = 25^\circ\text{C}$, $t_p = 10\mu\text{s}$
I^2t Value	$\int i^2 dt$	--	--	1.1	A ² s	$T_c = 25^\circ\text{C}$, $t_p = 10\text{ms}$
Repetitive Peak Reverse Voltage	V_{RRM}	--	--	650	V	$T_c = 25^\circ\text{C}$
Power Dissipation	P_{tot}	--	--	34 33	W	$T_c = 25^\circ\text{C}$ (TO-252-2L) $T_c = 25^\circ\text{C}$ (PQFN 5x6)
Junction Temperature	T_j	-55	--	175	°C	--
Storage Temperature	T_{stg}	-55	--	175		
Soldering Temperature	T_L	--	--	260		

Electrical Characteristics:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	
DC Characteristics							
DC Blocking Voltage	V_{DC}	650	--	--	V	$T_j = 25^\circ\text{C}$	
Forward Voltage	V_F	--	1.29 1.5	1.55 --		$I_F = 4\text{A}$, $T_j = 25^\circ\text{C}$ $I_F = 4\text{A}$, $T_j = 175^\circ\text{C}$	
Reverse Current	I_R	--	0.6 7	35 --		$V_R = 520\text{V}$, $T_j = 25^\circ\text{C}$ $V_R = 520\text{V}$, $T_j = 175^\circ\text{C}$	
AC Characteristics							
Total Capacitive Charge	Q_C	--	10.6	--	nC	$V_R = 400\text{V}$, $T_j = 25^\circ\text{C}$	
Total Capacitance	C_j	--	181 20 16	--	pF	$V_R = 1\text{V}$, $f = 1\text{MHz}$, $T_j = 25^\circ\text{C}$ $V_R = 200\text{V}$, $f = 1\text{MHz}$, $T_j = 25^\circ\text{C}$ $V_R = 400\text{V}$, $f = 1\text{MHz}$, $T_j = 25^\circ\text{C}$	
Capacitance Stored Energy	E_C	--	1.55	--		μJ	$V_R = 400\text{V}$, $T_j = 25^\circ\text{C}$

Thermal Characteristics:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Thermal Impedance, junction – case (TO-252-2L)	R_{th-jc}	--	4.4	--	K/W	--
Thermal Impedance, junction – case (PQFN 5x6)	R_{th-jc}	--	4.5	--		--
Thermal Impedance, junction – ambient	R_{th-ja}	--	--	--		Device on PCB, with 6 cm ² of cooling area

Electrical Characteristics Diagrams

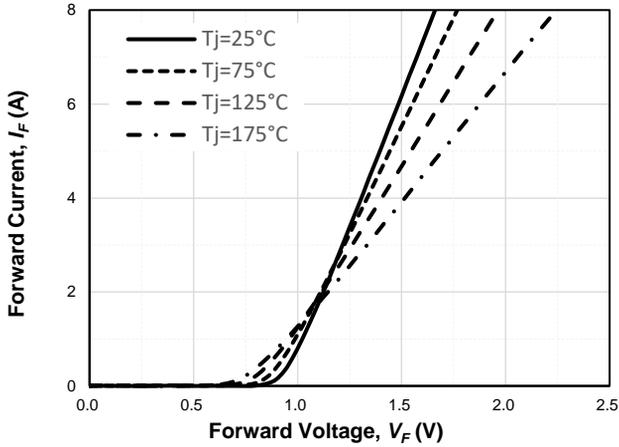


Fig. 1 Forward Characteristics

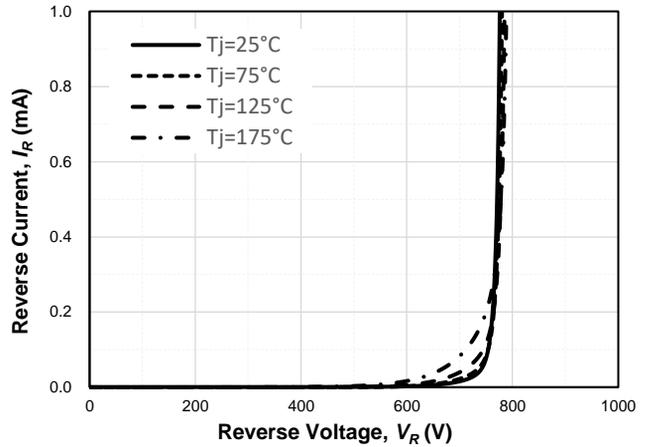


Fig. 2 Reverse Characteristics

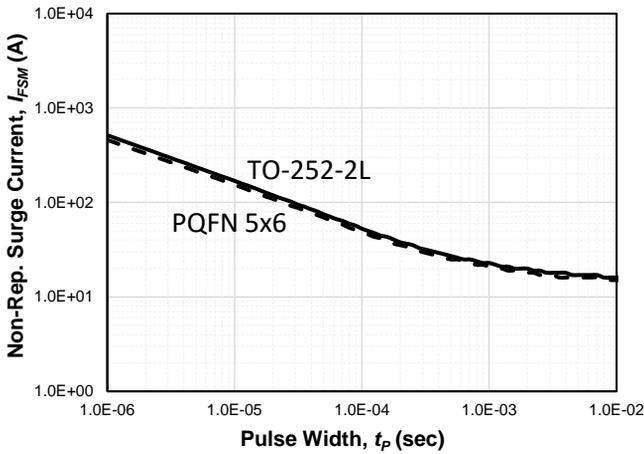


Fig. 3 Non-repetitive Peak Forward Surge Current vs. Pulse Width

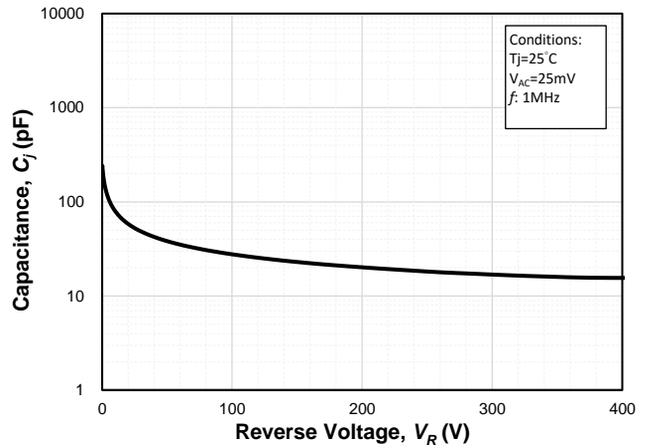


Fig. 4 Capacitance vs. Reverse Voltage

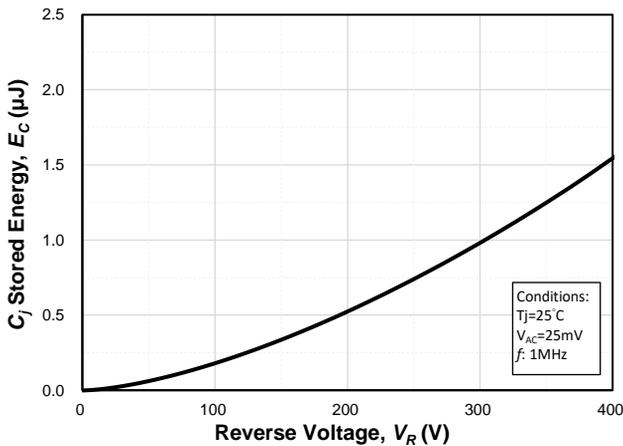


Fig. 5 Capacitance Stored Energy vs. Reverse Voltage

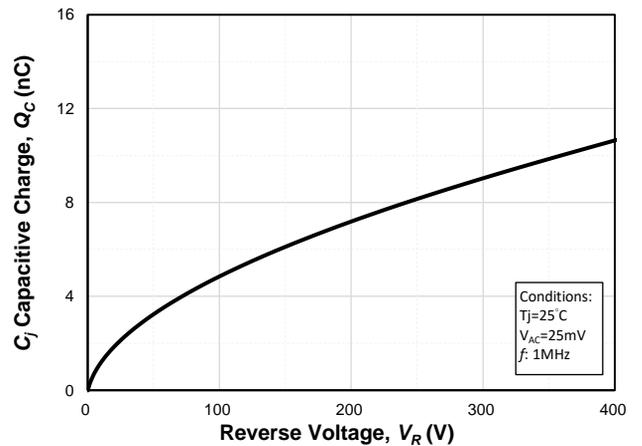


Fig. 6 Capacitive Charge vs. Reverse Voltage

Electrical Characteristics Diagrams

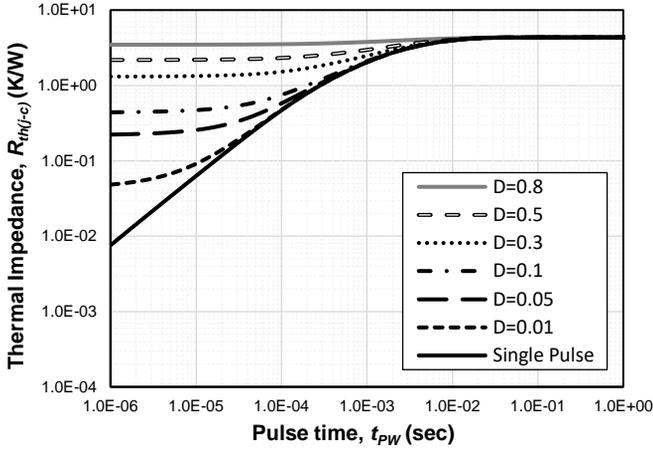


Fig. 7 Typ. Transient Thermal Impedance R_{th-jc} (TO-252-2L)

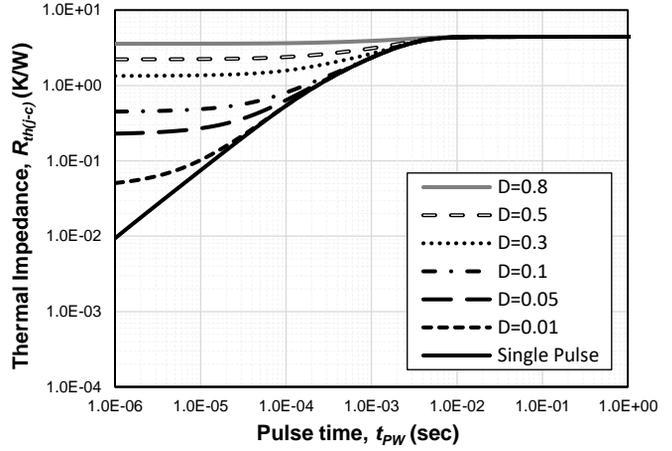


Fig. 8 Typ. Transient Thermal Impedance R_{th-jc} (PQFN 5x6)

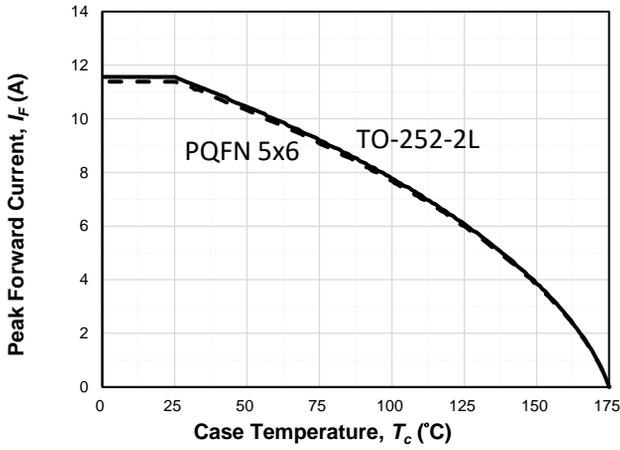


Fig. 9 Continuous I_F De-rating


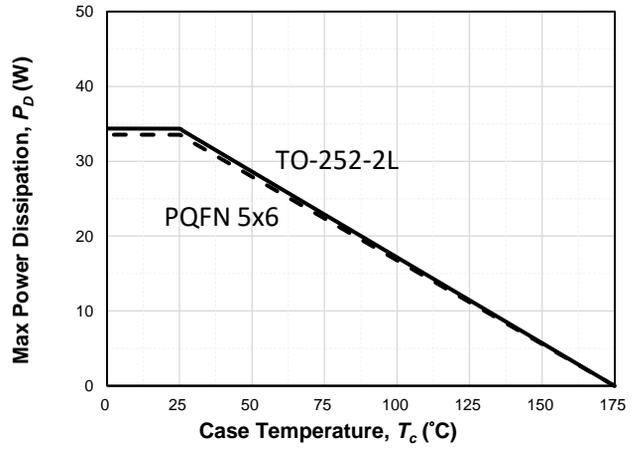


Fig. 10 Power Dissipation

Package Outline (TO-252-2L)

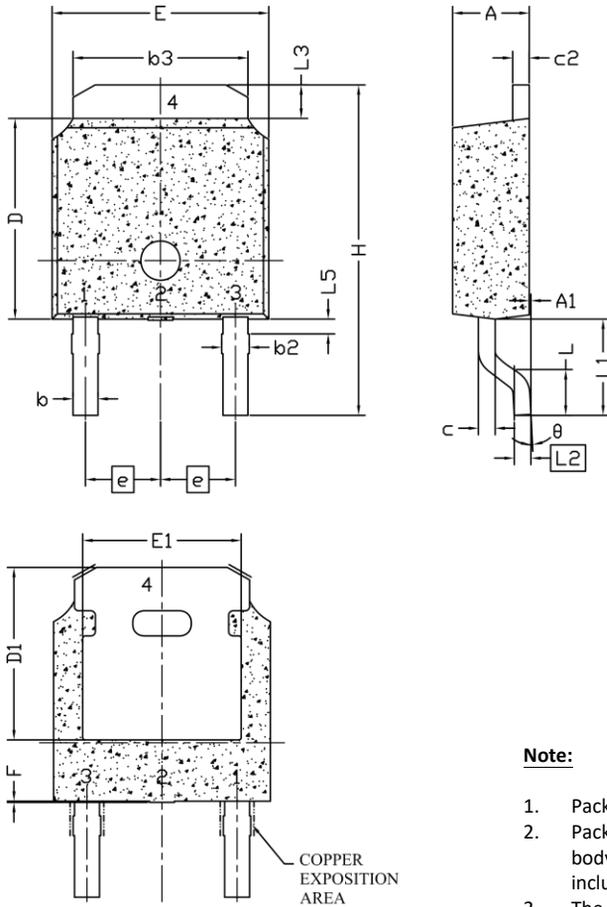


Symbol	Dimension (Millimeters)		
	Min.	Nom.	Max.
E	6.40	6.60	6.73
L	1.40	1.52	1.77
L1	2.743 REF.		
L2	0.508 BSC.		
L3	0.89	--	1.27
L5	--	--	--
D	6.00	6.10	6.22
H	9.40	10.00	10.40
b	0.64	0.76	0.88
b2	0.77	0.84	1.14
b3	5.21	5.34	5.46
e	2.286 BSC.		
A	2.20	2.30	2.38
A1	0.00	--	0.127
c	0.46	0.50	0.60
c2	0.46	0.50	0.58
D1	5.21	--	--
E1	4.40	--	--
F	--	--	0.45
θ	0°	--	10°


Note:

1. Package body sizes exclude mold flash, protrusion, or gate burrs.
2. Package body sizes determined at the outermost extremes of the plastic body exclusive of mold flash, gate burrs, and inter-lead flash, but including any mismatch between the top and bottom of the plastic body.
3. The package top may be smaller than the package bottom.
4. Dimension "b" does not include dambar protrusion. Allowable dambar protrusion shall be 0.1 mm total in excess of "b" dimension at the maximum material condition. The dambar cannot be located on the lower radius of the foot.
5. Dimension "F" is mold flash.





Land Pattern (Only for Reference)

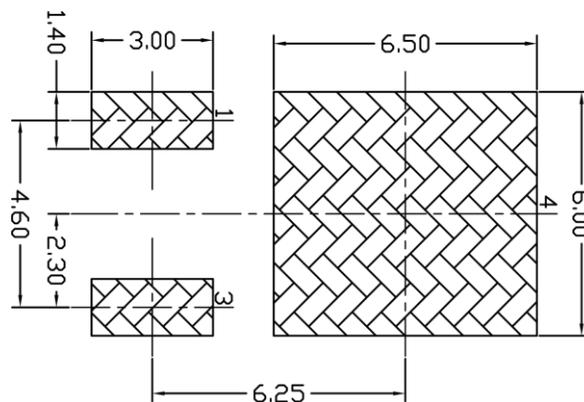

Package Outline (PQFN 5x6)

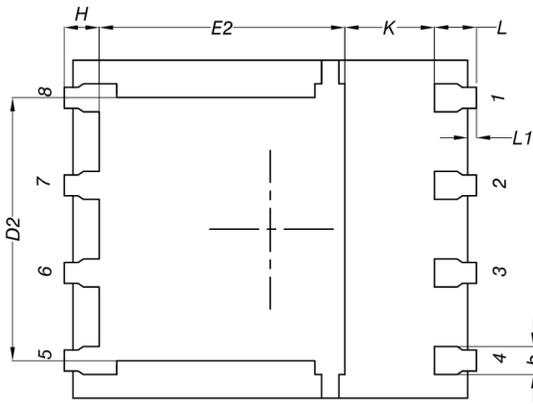

BACKSIDE VIEW

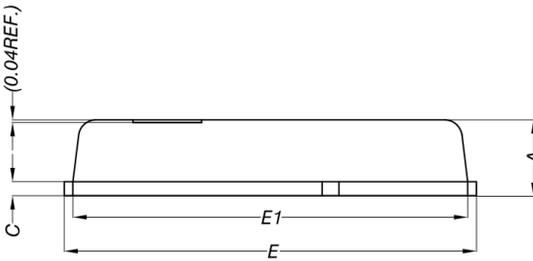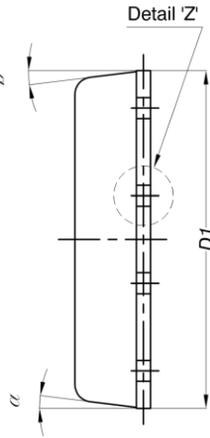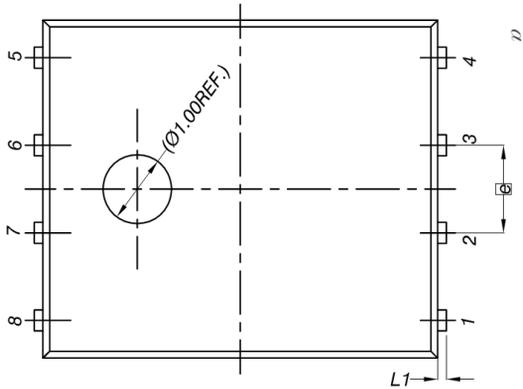


Symbol	Dimension (Millimeters)		
	Min.	Nom.	Max.
A	0.90	1.00	1.10
A1	0	--	0.05
b	0.33	0.41	0.51
C	0.20	0.25	0.30
D1	4.80	4.90	5.00
D2	3.61	3.81	3.96
E	5.90	6.00	6.10
E1	5.70	5.75	5.80
E2	3.38	3.58	3.78
e	1.27 BSC.		
H	0.41	0.51	0.61
K	1.10	--	--
L	0.51	0.61	0.71
L1	0.06	0.13	0.20
α	0°	--	12°

Note:

1. Package body sizes exclude mold flash, protrusion, or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 0.10 mm per side
2. Package body sizes determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar, tie bar burrs, gate burrs, and inter-lead flash, but including any mismatch between the top and bottom of the plastic body.
3. The package top may be smaller than the package bottom.

Land Pattern (Only for Reference)

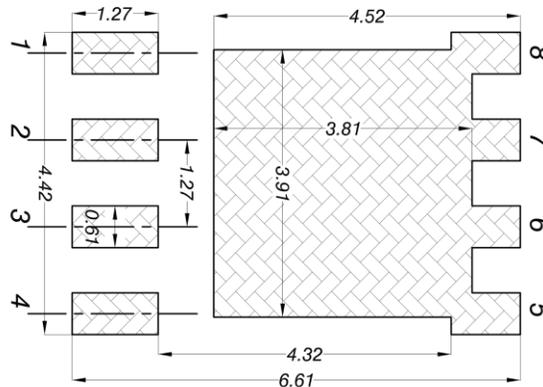

Revision History

Date	Revision	Changes
20.09	Pre. A	1 st issue
22.07	Revision 1.0	Revision to 1.0

Important Note (Disclaimer)

Fast SiC Semiconductor Inc. ("FSS") reserves the right to make changes and improvements to this product and the information provided in this document may be subject to change without prior notice. Buyers should contact FSS sales representatives to obtain the latest information on this product before placing order and are solely responsible for the selection and use of this product. In addition, any information given in this document is only intended to show the typical functions that can vary in different applications and shall not be regarded as a guarantee or warranty of conditions or characteristics.

This product is not designed or intended for use for applications in which the failure of the product could lead to personal injury, death or property damage, including but not limited to equipment used in medical systems, traffic communication or control systems, transportations (cars, ships, trains) and aerospace. FSS shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions provided herein.

Published by:
Fast SiC Semiconductor Inc.
Hsinchu, Taiwan
©2022 fast SiC Semiconductor Inc.
All Rights Reserved.