

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



October 2014


KA78RM33R Low Dropout Voltage Regulator

Features

- 0.5 A / 3.3 V Output Low-Dropout Voltage Regulator
- Low-Dropout Voltage (Max: 0.6 V)
- · Over-Current Protection, Thermal Shutdown
- · SOA Protection, Short-Circuit Protection

Description

The KA78RM33R is a low-dropout voltage regulator suitable for various electronic equipment. It provides constant voltage power source with surface-mount type package (DPAK). The dropout voltage is below 0.6 V in full-rated current 0.5 A. This regulator has over-current protection, thermal shut-down and the SOA (Safe operating Area) protection.



Ordering Information

Part Number	Operating Temperature Range	Top Mark	Package	Packing Method
KA78RM33RTF	-40 to +125°C	KA78RM33	DPAK	Tape and Reel
KA78RM33RTM	-40 to 1123 C	KA78RM33	DPAK	Tape and Reel

^{*} Refer to below unit orientation figure for TM / TF suffix packing.



Block Diagram

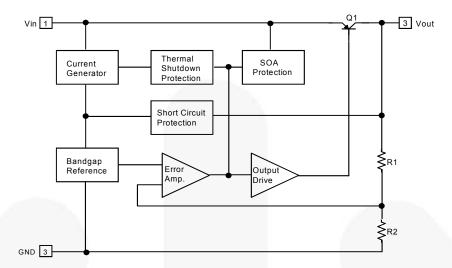


Figure 1. Block Diagram

Typical Application




Figure 2. DC Parameters

Notes:

- 1. C_l is required if the regulator is located an appreciable distance from power supply filter.
- 2. C_{O} improves stability and transient response. Refer to the figure 12 for ESR values of capacitors.

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at $T_A = 25^{\circ}C$ unless otherwise noted.

Symbol	Parameter	Value	Remark	Unit
V _{IN}	Input Voltage	20		V
Io	Output Current	0.5		Α
$R_{\theta JA}$	Thermal Resistance Junction-Air	110	No Heatsink	°C/W
P _D	Power Dissipation	Internally limited		
TJ	Junction Temperature	150		°C
T _{OPR}	Operating Temperature	-40 to +125		°C

Electrical Characteristics

Values are at T_A = 25°C, V_{IN} = 5 V, I_O = 0.25 A unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
V _{OUT}	Output Voltage	I _O =10 mA	3.22	3.30	3.38	V
R _{LOAD}	Load Regulation	5 mA < I _O < 0.5 A		2.0	20	mV
R _{LINE}	Line Regulation	4.3 V < V _{IN} < 16 V	1	2.0	20	mV
R _R	Ripple Rejection Ratio	$f = 120 \text{ Hz}, V_{IN} = 5 \text{ V} \pm 0.5 \text{ V}_{RMS}$	55			dB
V _{DROP}	Dropout Voltage	I _O = 0.5 A			0.6	V
IQ	Quiescent Current	I _O = 0 A		5.0	10	mA
I _{PK}	Peak Current	V _{IN} = 5 V	0.5	1.0		Α
V _N	Output Noise Voltage	10 Hz < f < 100 kHz		50		μV_{RMS}
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient of Output Voltage	-40°C < T _J < 125°C, I _O = 100 mA		-0.2		mV /°C

Typical Performance Characteristics




Figure 3. Normalized Output Voltage




Figure 5. Peak Output Current




Figure 7. Dropout Voltage vs. Temperature




Figure 4. Quiescent vs. Temperature




Figure 6. Output Voltage vs. Temperature




Figure 8. Dropout Voltage vs. Output Current

Typical Performance Characteristics (Continued)




Figure 9. Output Voltage vs. Input Voltage




Figure 11. Quiescent Current vs. Output Current




Figure 10. Quiescent Current vs. Input Voltage




Figure 12. Output Stability vs. Output Capacitor Change

Physical Dimensions Α – 5**.**55 MIN → 6.80 6.40 F 0.90 0.50 6,50 MIN 6.40 С 2 85 MIN 0.96 MAX 2,28 0.86 0.66 1.25 MIN LAND PATTERN RECOMMENDATION 4.83 MIN (6.80) SEE DETAIL A 9.80 9.20 0.10 B **GAGE PLANE** F\1.02 NOTES:UNLESS OTHERWISE SPECIFIED NOT COMPLIANT TO JEDEC TO-252 VARIATION AB ALL DIMENSION ARE IN MILLIMETER DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS LAD PATTERN PER IPC7351A ATANDARD TO228P991X239-3N DRAWING FILE NAME:MKT-TO252D03REV3. DOES NOT COMPLY JEDEC STANDARD VALUE. FAIRCHILD SEMICONDUCTOR. 0.127 MAX SEATING PLANE

Figure 13. 3-Lead, TO-252, JEDEC TO-252 VAR. AB, SURFACE MOUNT (DPAK)





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

F-PFS™ Awinda[®]
AX-CAP[®]* FRFET® Global Power Resource SM

GreenBridge™ BitSiC™ Build it Now™ Green FPS™ Green FPS™ e-Series™ CorePLUS™

CorePOWER™ Gmax™ $CROSSVOLT^{m}$ GTO™ CTL™ IntelliMAX™ Current Transfer Logic™

DEUXPEED[®] Making Small Speakers Sound Louder

Dual Cool™ EcoSPARK® MegaBuck™ EfficientMax™ MICROCOUPLER™

ESBC™ MicroFET™ MicroPak™

Fairchild® MillerDrive™ Fairchild Semiconductor® MotionMax™ FACT Quiet Series™ MotionGrid® FACT® FAST® MTi[®] MTx® FastvCore™ MVN® FETBench™ mWSaver® OptoHiT™

RapidConfigure™ ISOPLANAR™ and Better™ SignalWise™ SmartMax™ SMART START™ Solutions for Your Success™ SPM[®] MicroPak2™ STEALTH™ SuperFFT® SuperSOT™-3

QS™

TinyBoost[®] PowerTrench® TinyBuck® PowerXS™ TinyCalc™ Programmable Active Droop™ TinyLogic[®] TINYOPTO™ TinyPower™ Quiet Series™ TinyPWM™ TinyWire™ TranSiC™ TriFault Detect™

Saving our world, 1mW/W/kW at a time™ TRUECURRENT®* μSerDes™

LIHC Ultra FRFET™ UniFET™ VCX™ SuperSOT™-6 VisualMax™ SuperSOT™-8 VoltagePlus™ SupreMOS® XSTM SyncFET™ Xsens™ Sync-Lock™ 仙童™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE WW.FAIRCHILDSEMI.COM. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS. SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild . Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors

PRODUCT STATUS DEFINITIONS

Definition of Terms				
Datasheet Identification		Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 171

^{*} Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative