EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

Infrared Remote-Control Receiver Module

Features :

- High protection ability to EMI and metal case can be customized.
- Mold type and metal case type to meet the design of front panel.
- Elliptic lens to improve the characteristic against.
- Line-up for various center carrier frequencies.
- Low voltage and low power consumption.
- •High immunity against ambient light.
- Photodiode with integrated circuit.
- TTL and CMOS compatibility
- Long reception distance
- Low power consumption
- High sensitivity
- Pb free
- The product itself will remain within RoHS compliant version

Descriptions


• The device is a miniature type infrared remote control system receiver which has been developed and designed by utilizing the most updated IC technology. The PIN diode and preamplifier are assembled on lead frame, the epoxy package is designed as an IR filter. The demodulated output signal can directly be decoded by a microprocessor.

Applications

- Light detecting portion of remote control
- AV instruments such as Audio, TV, VCR, CD, MD, etc.
- Home appliances such as Air-conditioner, Fan, etc.
- The other equipments with wireless remote control.
- CATV set top boxes
- Multi-media Equipment

PART	MATERIAL	COLOR
Chip	Silicon	Black
Shell	SK7	Silver-white

Everlight Electronics Co., Ltd. Device No : SZDMO-860-008 http://www.everlight.com Prepared date : 23-Nov-2005



Page: 1 of 9 Huazhongfu




IRM-8601S-P



Package Dimensions

IRM-8601S-P

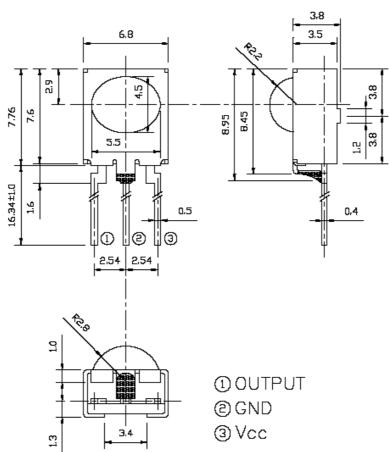

Notes: 1.All dimensions are in millimeters.

2. Tolerances unless dimensions ± 0.3 mm.

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	Notice
Supply Voltage	Vcc	0~6	V	
Operating Temperature	Topr	-20 ~ +80	°C	
Storage Temperature	Tstg	-40~ +85	°C	
Soldering Temperature	Tsol	260	°C	4mm from mold body less than 5 seconds

Everlight Electronics Co., Ltd. Device No : SZDMO-860-008 http://www.everlight.com Prepared date : 23-Nov-2005 Rev 1 Prepared by : Page: 2 of 9 Huazhongfu EVERLIGHT ELECTRONICS CO.,LTD.

IRM-8601S-P

Recommended Operating Condition

EVERLIGHT

Supply Voltage Rating: Vcc 4.5V to 5.5V

Electro-Optical Characteristics	(Ta=25°C, and Vcc=5.0V)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Consumption Current	Icc			3	mA	No signal input
B.P.F Center Frequency	Fo		38		KHz	
Peak Wavelength	λp		940		nm	
Reception Distance	L ₀	8			m	
	L ₄₅	4				
Half Angle(Horizontal)	Θ_h		45		deg	At the ray axis *1
Half Angle(Vertical)	Θ_{v}		35		deg	
High Level Pulse Width	$T_{\rm H}$	400		800	μ s	At the ray axis
Low Level Pulse Width	T_{L}	400		800	μ s	*2
High Level Output Voltage	V _H	4.5			V	
Low Level Output Voltage	VL		0.2	0.5	V	

*1:The ray receiving surface at a vertex and relation to the ray axis in the range of $\theta = 0^{\circ}$ and $\theta = 45^{\circ}$. *2:A range from 30cm to the arrival distance. Average value of 50 pulses.

http://www.everlight.com Prepared date : 23-Nov-2005 EVERLIGHT ELECTRONICS CO., LTD.

IRM-8601S-P

Test Method :

The specified electro-optical characteristics is satisfied under the following Conditions at the controllable distance.

^①Measurement place

RLIGH

A place that is nothing of extreme light reflected in the room.

②External light

Project the light of ordinary white fluorescent lamps which are not high Frequency lamps and must be less then 10 Lux at the module surface.

 $(\text{Ee} \leq 10 \text{Lux})$

③Standard transmitter

A transmitter whose output is so adjusted as to **Vo=400mVp-p** and the output Wave form shown in Fig.-1.According to the measurement method shown in Fig.-2 the standard transmitter is specified.

However, the infrared photodiode to be used for the transmitter should be


 $\lambda p=940$ nm, $\Delta \lambda=50$ nm. Also, photodiode is used of PD438B(Vr=5V).

Measuring system

According to the measuring system shown in Fig.-3


Fig.-1 Transmitter Wave Form

D.U.T output Pulse

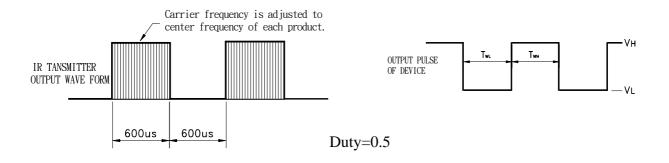


http://www.everlight.com Prepared date : 23-Nov-2005 Rev 1 Prepared by : **EVERLIGHT** EVERLIGHT ELECTRONICS CO.,LTD.


<u>IRM-8601S-P</u>

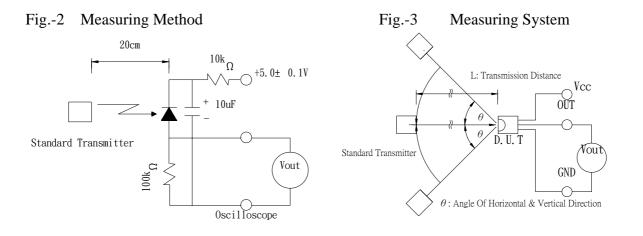

Block Diagram :

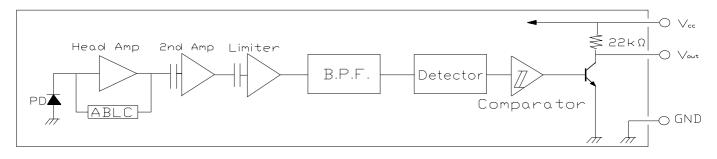

Application Circuit :

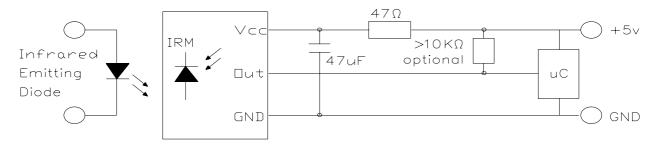

RC Filter should be connected closely between Vcc pin and GND pin.

Everlight Electronics Co., Ltd. Device No : SZDMO-860-008 http://www.everlight.com Prepared date : 23-Nov-2005 Rev 1PaPrepared by :Ht

Page: 5 of 9 Huazhongfu EVERLIGHT ELECTRONICS CO., LTD.

IRM-8601S-P

Fig.-4 Relative Spectral Sensitivity vs. Wavelength 100 $\langle \rangle$ $\langle \rangle$ 90 Distance 80 Relative Responsitibity 70 60 Transmission 50 40 30 20 10 Relative 0 600 700 800 900 1000 1100 Wavelength (nm)

Typical Electro-Optical Characteristics Curves

EVERLIGHT

Fig.-5 Relative Transmission Distance vs. Direction



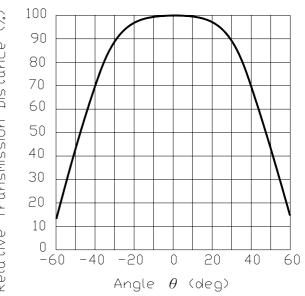


Fig.-6 Output Pulse Length vs. Arrival Distance Fig.-7 Arrival Distance vs. Supply Voltage

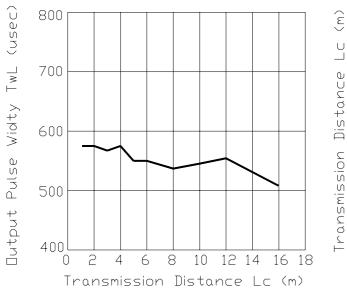

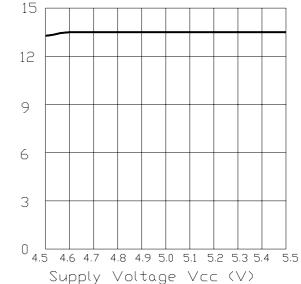

Everlight Electronics Co., Ltd. Device No : SZDMO-860-008 http://www.everlight.com Prepared date : 23-Nov-2005 Rev 1 Prepared by : Page: 6 of 9 Huazhongfu EVERLIGHT ELECTRONICS CO.,LTD.

IRM-8601S-P


Typical Electro-Optical Characteristics Curves

Fig.-8 Relative Transmission Distance vs. Center Carrier Frequency

EVERLIGHT

Fig.-9 Arrival Distance vs. Ambient Temperature

100 $\langle \rangle \rangle$ 90 Relative Distance 80 70 60 50 25 30 35 40 45 50 20 Carrier Frequency (KHz)

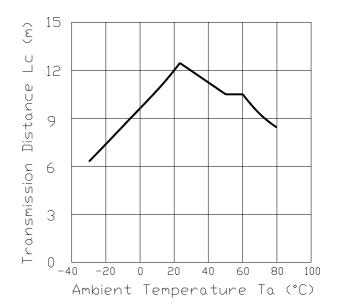

Everlight Electronics Co., Ltd. Device No : SZDMO-860-008 http://www.everlight.com Prepared date : 23-Nov-2005 Rev 1 Prepared by : Page: 7 of 9 Huazhongfu EVERLIGHT ELECTRONICS CO.,LTD.

IRM-8601S-P

Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

EVERLIGHT

Test Items	Test Conditions	Failure Judgement Criteria	<u>Samples(n)</u> Defective(c)
Operation life	Vcc=5V,Ta:25°C 1000hrs		n=22,c=0
Temperature cycle	1 cycle -40°C +25°C +100°C (15min)(5min)(15min) 50 cycle test		n=22,c=0
Thermal shock	-10°C to +100 +°C (5min)(10sec)(5min) 50 cycle test	$L0 \leq L \times 0.8$ $L45 \leq L \times 0.8$	n=22,c=0
High temperature test	Temp: +100°C 1000hrs	L: Lower	n=22,c=0
Low temperature storage	Temp: -40°C 1000hrs	specification limit	n=22,c=0
High temperature High humidity	Ta: 85°C ,RH:85% 1000hrs		n=22,c=0
Solder heat	Temp: 260±5°C 5sec 4mm From the bottom of the package.		n=22,c=0
Solderability	Temp: 230±5°C 5sec 4mm From the bottom of the package.	More than 90% of lead to be covered by soldering	n=22,c=0

http://www.everlight.com Prepared date : 23-Nov-2005 Page: 8 of 9 Huazhongfu




IRM-8601S-P

Packing Quantity Specification

- 1. 250pcs/1Bag
- 2. 10Boxes/1Carton

Label Form Specification

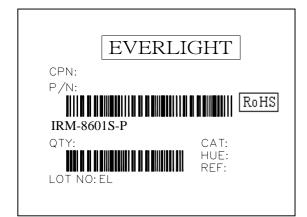

CPN: Customer's Production Number P/N : Production Number QTY: Packing Quantity CAT: Ranks HUE: Peak Wavelength REF: Reference LOT No: Lot Number MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http:\\www.everlight.com*

Everlight Electronics Co., Ltd. Device No : SZDMO-860-008 http://www.everlight.com Prepared date : 23-Nov-2005 Rev 1 Prepared by :

Page: 9 of 9 Huazhongfu