

Harvatek Surface Mount CHIP LEDs Data Sheet B18W1NG--20C000114U1930



Official Product	ficial Product HT Part No. B18W1NG20C000114U1930				
Tentative Product	*******				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 1/14	



DISCLAIMER	3
LIFE SUPPORT POLICY	3
PRODUCT SPECIFICATIONS	4
ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION	4
LABEL SPECIFICATIONS	5
SPECIFICATIONS RANGE	6
PRODUCT FEATURES	7
ELECTRO-OPTICAL CHARACTERISTICS	7
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW	
Soldering	7
ABSOLUTE MAXIMUM RATINGS	7
CHARACTERISTICS OF B18W1NG	8
PRECAUTION FOR USE	9
PACKAGING	10
TAPE DIMENSION	10
REEL DIMENSION	
Packing	11
DRY PACK	12
Baking	12
PRECAUTIONS	12
REFLOW SOLDERING	13
Reworking	13
CLEANING	
CAUTIONS OF PICK AND PLACE	14
REVISE HISTORY	14

Official Product	cial Product HT Part No. B18W1NG20C000114U1930				
Tentative Product	*******				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 2/14	



DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	HT Part No. B18W1NG20C000114U1930				
Tentative Product	********				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 3/14	



Product Specifications

Item	Specification	Material	Quantity
Luminous	1440-3600 mcd		
Intensity(Iv)	@20 mA/ $T_S = 25^{\circ}C$; Tolerance: $\pm 10\%$		
Wavelength	515-535 nm		
	@20mA/ T_S = 25°C; Tolerance: \pm 0.5nm		
Vf	2.7-3.9 V		
	@20 mA/ $T_S = 25^{\circ}C$; Tolerance: $\pm 0.05V$		
Ir	< 2 μA @ V _R = 5 V		
Resin	Clear	Ероху	
Carrier tape	EIA 481-1A specs	Conductive black tape	
Reel	EIA 481-1A specs	Conductive black	
Label	HT standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel per bag
Carton	HT standard	Paper	Non-specified

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of Iv, CIE and Vf. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

Note: This is shipped test conditions

*Remarks: This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

ATTENTION: Electrostatic Discharge (ESD) protection



The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must


be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.


Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	********			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 4/14



Label Specifications

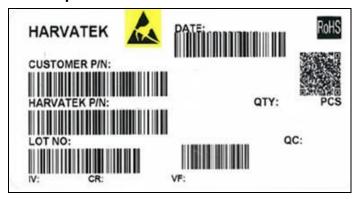

Harvatek P/N:

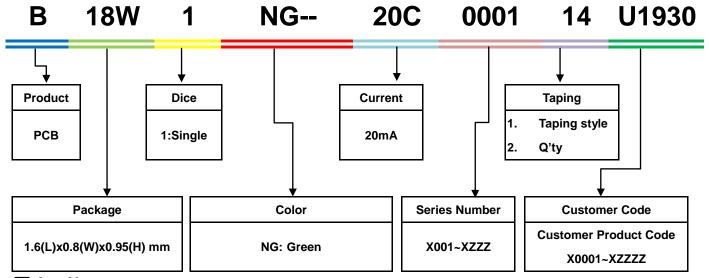

Lot No.:

1	2	3	4	5	6	7	8	9	10
E	1	A	1	Α	2	2	L	1	2
Cod	le 1 2	Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10
		Mfg. Year	Mfg. Month	Mfg. Date	Consecuti	ve number		Special cod	e
		2010-A		1:A					
		2011-B		2:B					
		2012-C	1:Jan.	3:C					
			2:Feb.	***					
Internal To	anian Cada	2018-I/J	11444	26:Z	04	77		000~ZZZ	
internal ir	acing Code	2019-K	A:Oct.	27:7	012	-ZZ		000~222	
		1.54	B:Nov.	28:8					
		2022-N	C:Dec.	29:9					
		2023-P	10000000000	30:3					
		***		31:4					

Official Product	HT Part No. B18W1NG20C000114U1930				
Tentative Product	*******				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 5/14	



Specifications Range

■Luminous Intensity (Iv) Bin:

Color	Bin Code	Spec. Range
	AA	1440.0-1800.0 mcd
NG	АВ	1800.0-2250.0 mcd
NG	AC	2250.0-2850.0 mcd
	AD	2850.0-3600.0 mcd

Note: It maintains a tolerance of ±10% on Luminous Intensity

■Wavelength Bin:

Color	Bin Code	Spec. Range
	Α	515.0-520.0 nm
No	В	520.0-525.0 nm
NG	С	525.0-530.0 nm
	D	530.0-535.0 nm

Note: It maintains a tolerance of ±0.5nm on Wavelength Bin

■ Forward Voltage (Vf) Bin:

Color	Bin Code	Spec. Range		
	G8	2.7-2.9 V		
	Н7	2.9-3.1 V		
NG	Н8	3.1-3.3 V		
NG	J7	3.3-3.5 V		
	J8	3.5-3.7 V		
	K7	3.7-3.9 V		

Note: It maintains a tolerance of ±0.05V on forward voltage measurements

Official Product HT Part No. B18W1NG20C000114U1930				
Tentative Product	*******			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 6/14




Product Features

Electro-Optical Characteristics

	(T _{Soldering} , 25°C)								
Corios	Emitting Color	Material	V _F	(V)	Wa	velength λ	(nm)	I _V (mcd)	Viewing
Series	Emitting Color	Material	typ	max	λ_{D}	λ_{P}	Δλ	Typical	Angle $2\theta \frac{1}{2}$
B18W1NG20	NG	InGaN	3.2	3.9	522	520	30	2250	35

Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

(Unit: mm Tolerance: +/-0.1)

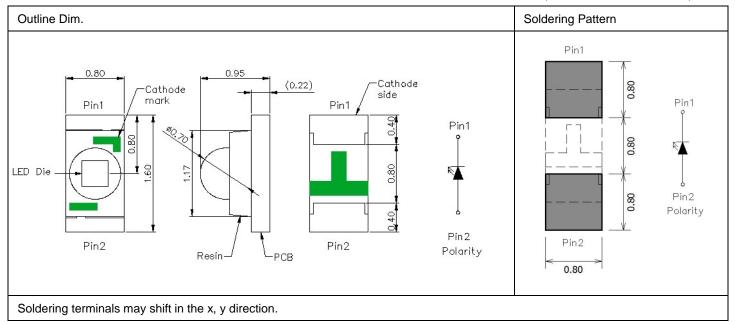

Absolute Maximum Ratings

 $(T_{Soldering}, 25^{\circ}C)$


Series	P _D (mW)	I _F (mA)	I _{FP} (mA)*	T _{OP} (°C)	T _{ST} (℃)
Color	Power	Forward	Pulse Forward	Operating	Storage
Coloi	Dissipation	Current	Current	Temperature	Temperature
NG	78	20	80	-40~+85	-40~+100

 $^{^{\}ast}$ Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width

Official Product HT Part No. B18W1NG20C000114U1930				
Tentative Product	********	*******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 7/14



Characteristics of B18W1NG

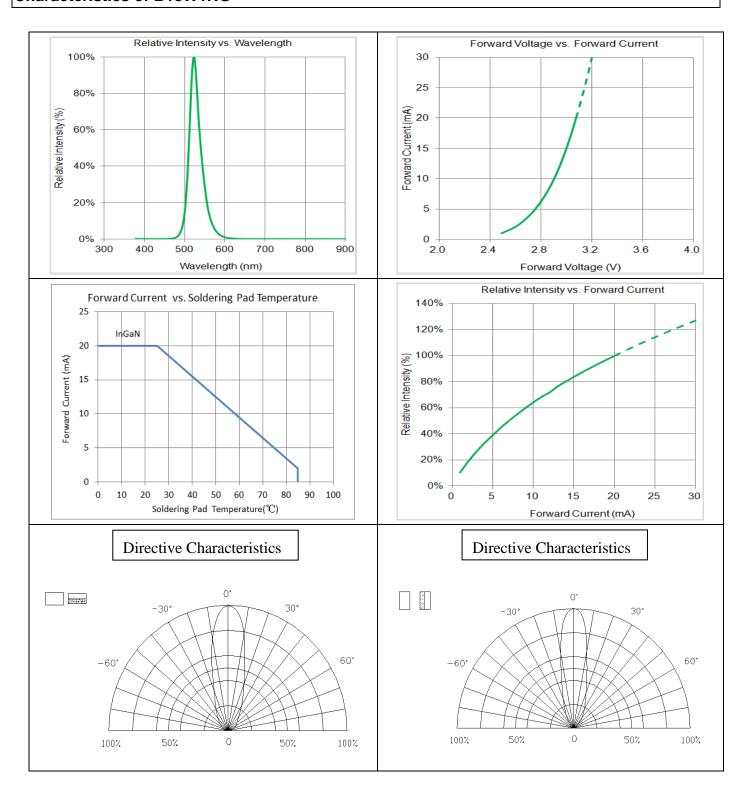

Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	********	*********		
	t to changes for improvement without advance awings, company confidential all rights reserved.	09/01/2020	Version 1.1	Page 8/14




Precaution for Use

- 1. The chips should not be used directly in any type of fluid such as water, oil, organic solvent, etc.
- 2. When the LEDs are illuminating, the maximum ambient temperature should be first considered before operation.
- 3. LEDs must be stored in a clean environment. A sealed container with a nitrogen atmosphere is necessary if the storage period is over 3 months after shipping.
- 4. The LEDs must be used within 4 weeks after unpacked. Unused products must be repacked in an anti-electrostatic package, folded to close any opening and then stored in a dry and cool space.
- 5. The appearance and specifications of the products may be modified for improvement without further notice.
- 6. The LEDs are sensitive to the static electricity and surge. It is strongly recommended to use a grounded wrist band and anti-electrostatic glove when handling the LEDs.If a voltage over the absolute maximum rating is applied to LEDs, it will damage LEDs.Damaged LEDs will show some abnormal characteristics such as remarkable increase of leak current, lower turn-on voltage and getting unlit at low current.

Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	********	******		
	t to changes for improvement without advance awings, company confidential all rights reserved.	09/01/2020	Version 1.1	Page 9/14




Packaging Tape Dimension

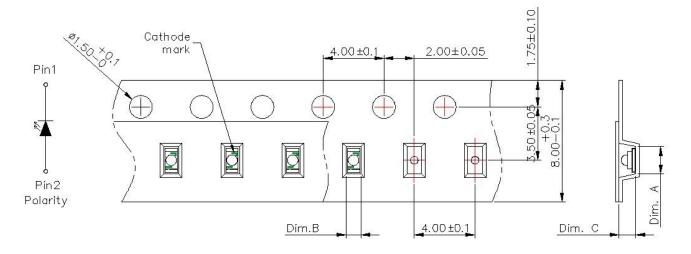

Dim. A	Dim. B	Dim. C	Q'ty/Reel
0.9±0.05	1.76±0.05	0.9±0.05	4K


Unit: mm

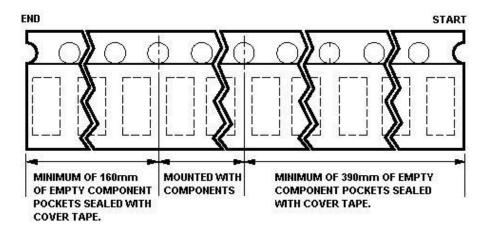


Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	*******			
	t to changes for improvement without advance rawings, company confidential all rights reserved.	09/01/2020	Version 1.1	Page 10/14



Reel Dimension

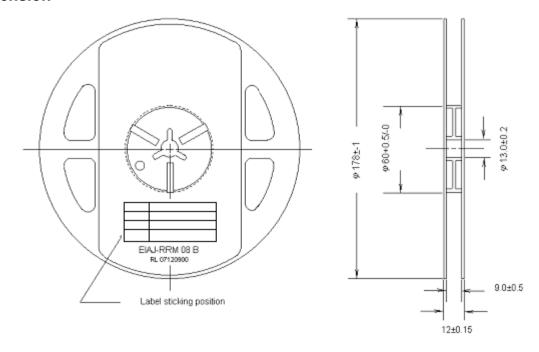

Packing

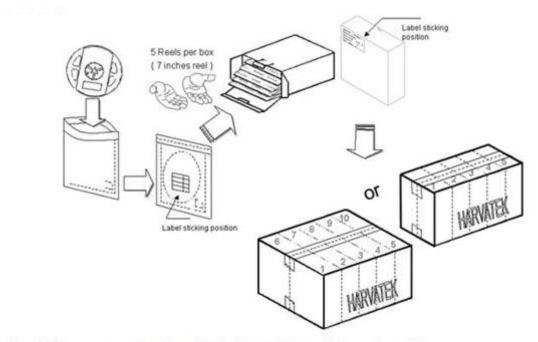

5 or 10 boxes per carton is available depending on shipment quantity.

Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	********			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		09/01/2020	Version 1.1	Page 11/14




Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

A humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

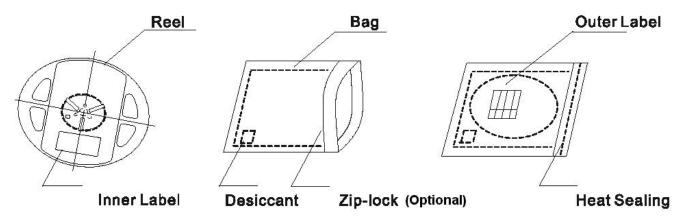

Baking

Baking before soldering is recommended when the package has been unsealed for 4 weeks. The conditions are as followings:

- 1. $60\pm3^{\circ}$ C ×(12~24hrs)and<5%RH, taped reel type.
- 2. $100\pm3^{\circ}$ C × (45min~1hr), bulk type.
- 3. $130\pm3^{\circ}$ C ×(15min~30min), bulk type.

Precautions

- 1. Avoid exposure to moisture at all times during transportation or storage.
- 2. Anti-Static precaution must be taken when handling GaN, InGaN, and AllnGaP products.
- 3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
- 4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
- 5. Avoid direct contact with the surface through which the LED emits light.
- 6. If possible, assemble the unit in a clean room or dust-free environment.

Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	*******			
	t to changes for improvement without advance rawings, company confidential all rights reserved.	09/01/2020	Version 1.1	Page 12/14




Reflow Soldering

Recommend soldering paste specifications:

- 1. Operating temp.: Above 217°C ,60~150 sec.
- 2. Peak temp.:260°C Max.,10sec Max.
- 3. Reflow soldering should not be done more than two times.
- 4. Never attempt next process until the component is cooled down to room temperature after reflow.
- 5. The recommended reflow soldering profile (measured on the surface of the LED terminal) is as following:

Lead-free Solder Profile

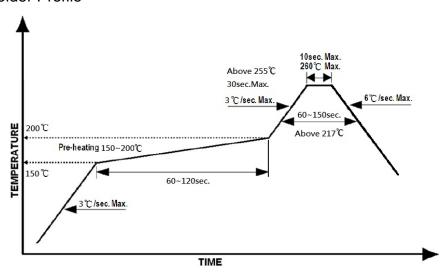

Reworking

- Rework should be completed within 5 seconds under 260°C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultra sonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100°C max, <3min

Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	********			
	t to changes for improvement without advance rawings, company confidential all rights reserved.	09/01/2020	Version 1.1	Page 13/14



Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

Revise History

Rev.	Descriptions	Date	Page
-		05/16/2018	-
1.0	Update to official version & Renew Luminous Intensity	02/25/2019	P4+P6
1.1	Add Customer Product Code	09/01/2020	P5

Official Product	HT Part No. B18W1NG20C000114U1930			
Tentative Product	********	********		
	t to changes for improvement without advance awings, company confidential all rights reserved.	09/01/2020	Version 1.1	Page 14/14