

# Harvatek Surface Mount CHIP LEDs Data Sheet B2612UDNB20D000312U1930

Official Product HT Part No. B2612UDNB20D000312U1930				
Tentative Product	*******			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/12/2021	Version 1.3	Page 1/14



DISCLAIMER	3
LIFE SUPPORT POLICY	3
PRODUCT SPECIFICATIONS	4
ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION	4
LABEL SPECIFICATIONS	5
SPECIFICATIONS RANGE	6
PRODUCT FEATURES	7
ELECTRO-OPTICAL CHARACTERISTICS	7
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFL	.ow
Soldering	7
ABSOLUTE MAXIMUM RATINGS	7
CHARACTERISTICS OF B2612UDNB	8
PRECAUTION FOR USE	9
PACKAGING	10
TAPE DIMENSION	10
REEL DIMENSION	
Packing	11
DRY PACK	12
Baking	12
PRECAUTIONS	12
REFLOW SOLDERING	13
REWORKING	13
CLEANING	13
CAUTIONS OF PICK AND PLACE	14
REVISE HISTORY	14

7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	*******			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/12/2021	Version 1.3	Page 2/14



#### DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

## **Life Support Policy**

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	*******			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/12/2021	Version 1.3	Page 3/14



#### **Product Specifications**

Item	Specification	Material	Quantity
Luminous	UD:45.0-285.0 mcd		
Intensity(Iv)	NB:45.0-285.0 mcd		
	@20mA/ $T_s$ = 25 $^{\circ}$ C; Tolerance: $\pm$ 10%		
Wavelength	UD:600.0-612.0 nm		
	NB:460.0-476.0 nm		
	@20mA/ $T_S$ = 25°C; Tolerance: $\pm$ 0.5nm		
Vf	UD:1.6-2.4V		
	NB:2.7-3.9V		
	@20mA/ $T_S = 25^{\circ}C$ ; Tolerance: $\pm 0.05V$		
Ir	< 10 µA @ V <sub>R</sub> = 5 V		
Resin	Diffused	Ероху	
Carrier tape	EIA 481-1A specs	Conductive black tape	
Reel	EIA 481-1A specs	Conductive black	
Label	HT standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel per bag
Carton	HT standard	Paper	Non-specified

#### Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of Iv,  $\lambda_D$  and Vf. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

Note: This is shipped test conditions

\*Remarks: This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

#### ATTENTION: Electrostatic Discharge (ESD) protection



The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must


be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.


Official Product HT Part No. B2612UDNB20D000312U1930				
Tentative Product	*******			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/12/2021	Version 1.3	Page 4/14



## **Label Specifications**

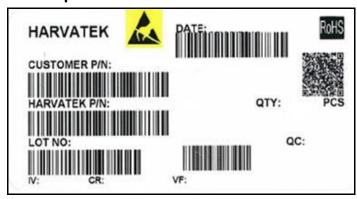

## Harvatek P/N:

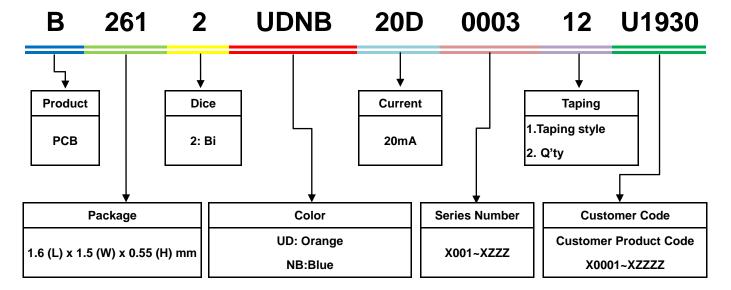

## Lot No.:

1	2	3	4	5	6	7	8	9	10
E	1	A	1	Α	2	2	L	1	2
Cod	e 1 2	Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10
		Mfg. Year	Mfg. Month	Mfg. Date	Consecuti	ve number		Special cod	e
		2010-A		1:A					
		2011-B		2:B					
		2012-C	1:Jan.	3:C					
			2:Feb.	4+4					
Internal Tr	ssies Cada	2018-I/J	11444	26:Z	01	77		000~ZZZ	
internal (r	acing Code	2019-K	A:Oct.	27:7	011	-ZZ		000~222	
			B:Nov.	28:8					
		2022-N	C:Dec.	29:9					
		2023-P	200000000000000000000000000000000000000	30:3					
		***		31:4					

Official Product HT Part No. B2612UDNB20D000312U1930				
Tentative Product	*******			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/12/2021	Version 1.3	Page 5/14



## **Specifications Range**

# ■Luminous Intensity (Iv) Bin:

Color	Bin Code	Spec. Range		
	Р	45.00-71.50 mcd		
UD	Q	71.50-112.5 mcd		
OD	R	112.5-180.0mcd		
	S	180.0-285.0mcd		
	Р	45.00-71.50 mcd		
NB	Q	71.50-112.5 mcd		
NB	R	112.5-180.0mcd		
	S	180.0-285.0mcd		

Note: It maintains a tolerance of ±10% on luminous intensity

## **■**Wavelength Bin:

Color	Bin Code	Spec. Range		
	В	600.0-603.0 nm		
UD	С	603.0-606.0 nm		
OD	D	606.0-609.0 nm		
	E	609.0-612.0 nm		
	Α	460.0-464.0 nm		
NB	В	464.0-468.0 nm		
NB	С	468.0-472.0 nm		
	D	472.0-476.0 nm		

Note: It maintains a tolerance of <u>+</u> 0.5nm on Wavelength BIN

# ■Forward Voltage (Vf) Bin:

Color	Bin Code	Spec. Range
UD	E18	1.6-2.4 V
	G8	2.7-2.9 V
	H7	2.9-3.1 V
ND	Н8	3.1-3.3 V
NB	J7	3.3-3.5 V
	J8	3.5-3.7 V
	K7	3.7-3.9 V

Note: It maintains a tolerance of ±0.05V on forward voltage measurements

Official Product HT Part No. B2612UDNB20D000312U1930					
Tentative Product	*******				
Specifications are subject notice. Proprietary data, dr	03/12/2021	Version 1.3	Page 6/14		




## **Product Features**

## **Electro-Optical Characteristics**

								(T <sub>Sold</sub>	lering , 25 °C )
Series	Emitting Color Mate	Motorial	V <sub>F</sub> (V)		Wavelength λ(nm)		I <sub>V</sub> (mcd)	Viewing	
		Material	typ	max	$\lambda_{D}$	$\lambda_{P}$	Δλ	Typical	Angle $2\theta \frac{1}{2}$
B2612UDNB20	UD	AllnGaP	2.0	2.0 2.4	605	611	11 17	71.5	X=140
			2.0			5   611			Y=120
	NB InGaN	0.0	0.0	470 400	400	400 40	74.5	X=140	
		ingan	3.3	3.9	470	470 468	40	71.5	Y=120

# Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

(Unit:mm Tolerance: +/-0.1)

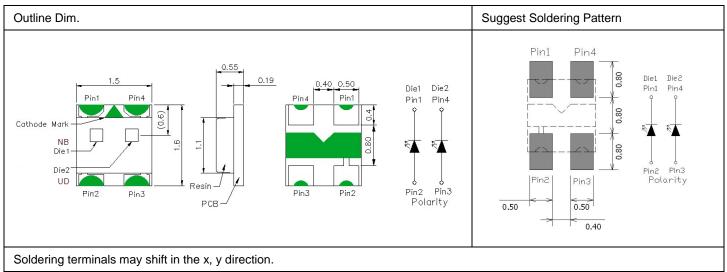

# **Absolute Maximum Ratings**

(T<sub>Soldering</sub> 25°C)


Series	P <sub>D</sub> (mW)	I <sub>F</sub> (mA)	I <sub>FP</sub> (mA)*	T <sub>OP</sub> (°C)	T <sub>ST</sub> (℃)
Color	Power	Forward	Pulse Forward	Operating	Storage
Coloi	Dissipation	Current	Current	Temperature	Temperature
UD	48	20	100	-40~+85	-40~+100
NB	78	20	80	-40~+85	-40~+100


<sup>\*</sup>Condition for  $I_{\text{FP}}$  is pulse of 1/10 duty and 0.1msec width


Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	********			
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 7/14




# Characteristics of B2612UDNB











# Directive Characteristics



## **Directive Characteristics**



7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	********	*******		
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 8/14




#### **Precaution for Use**

- 1. The chips should not be used directly in any type of fluid such as water, oil, organic solvent, etc.
- 2. When the LEDs are illuminating, the maximum ambient temperature should be first considered before operation.
- 3. LEDs must be stored in a clean environment. A sealed container with a nitrogen atmosphere is necessary if the storage period is over 3 months after shipping.
- 4. The LEDs must be used within 4 weeks after unpacked. Unused products must be repacked in an anti-electrostatic package, folded to close any opening and then stored in a dry and cool space.
- 5. The appearance and specifications of the products may be modified for improvement without further notice.
- 6. The LEDs are sensitive to the static electricity and surge. It is strongly recommended to use a grounded wrist band and anti-electrostatic glove when handling the LEDs.If a voltage over the absolute maximum rating is applied to LEDs, it will damage LEDs.Damaged LEDs will show some abnormal characteristics such as remarkable increase of leak current, lower turn-on voltage and getting unlit at low current.


7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	********	*******		
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 9/14



# Packaging Tape Dimension

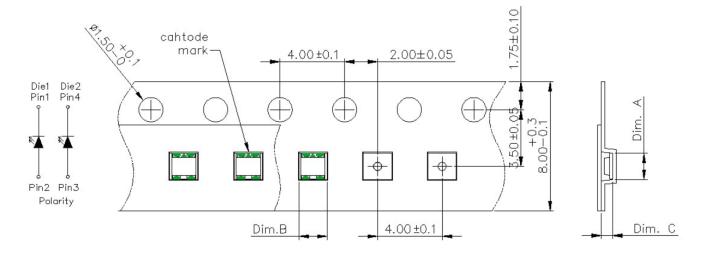


Dim. A	Dim. B	Dim. C	Q'ty/Reel
1.75±0.05	1.65±0.05	0.70±0.05	2K

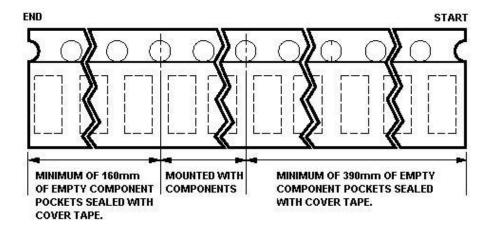


7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	********	********		
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 10/14



## **Reel Dimension**

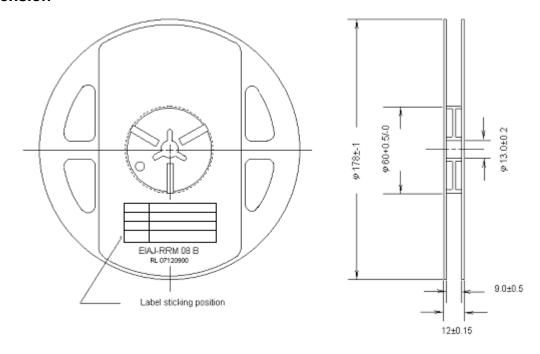

# **Packing**

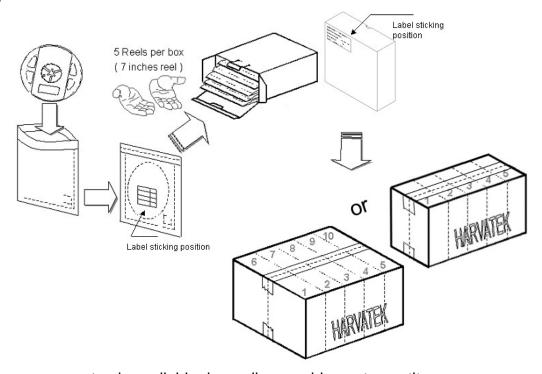

5 or 10 boxes per carton is available depending on shipment quantity.

7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	********	********		
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 11/14




## **Dry Pack**

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

A humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

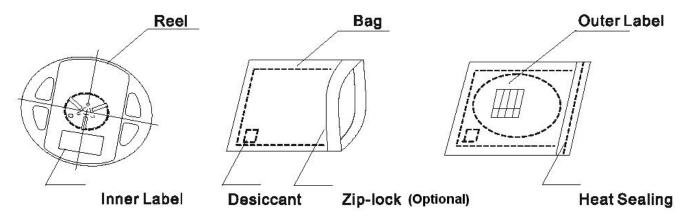

## **Baking**

Baking before soldering is recommended when the package has been unsealed for 4 weeks. The conditions are as followings:

- 1.  $60\pm3$ °C×(12~24hrs)and<5%RH, taped reel type.
- 2.  $100\pm3^{\circ}$  × (45min~1hr), bulk type.
- 3.  $130\pm3^{\circ}$ C×(15min~30min), bulk type.

#### **Precautions**

- 1. Avoid exposure to moisture at all times during transportation or storage.
- 2. Anti-Static precaution must be taken when handling GaN, InGaN, and AlGaInP products.
- 3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
- 4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
- 5. Avoid direct contact with the surface through which the LED emits light.
- 6. If possible, assemble the unit in a clean room or dust-free environment.

7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	*********	********		
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 12/14




#### **Reflow Soldering**

Recommend soldering paste specifications:

- Operating temp.: Above 217<sup>o</sup>C ,60~150 sec.
- 2. Peak temp.:260 °C Max.,10sec Max.
- 3. Reflow soldering should not be done more than two times.
- 4. Never attempt next process until the component is cooled down to room temperature after reflow.
- 5. The recommended reflow soldering profile (measured on the surface of the LED terminal) is as following:

Lead-free Solder Profile

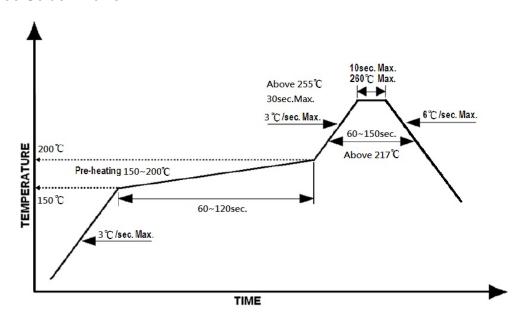

#### Reworking

- Rework should be completed within 5 seconds under 260 ℃.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

## Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min</li>
- Ultrasonic cleaning: < 15W/ bath; bath volume ≤ 1liter</li>
- Curing: 100 ℃ max, <3min</li>

Official Product	al Product HT Part No. B2612UDNB20D000312U1930				
Tentative Product	********	*******			
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 13/14	



## Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

## **Revise History**

Rev.	Descriptions	Date	Page
1.0	-	12/18/2015	-
1.1	Renew form	05/25/2017	-
1.2	Renew form	02/27/2018	-
1.3	Add Customer Product Code	03/12/2021	P5

7				
Official Product	HT Part No. B2612UDNB20D000312U1930			
Tentative Product	********	*******		
	t to changes for improvement without advance awings, company confidential all rights reserved.	03/12/2021	Version 1.3	Page 14/14