

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Energy storage, VRLA-AGM, 24 V DC, 4 Ah, automatic detection and communication with QUINT UPS-IQ

**Product Description** 

For continuous monitoring and intelligent management, there is constant communication with the QUINT UPS. Thanks to automatic detection of the energy storage, and tool-free switching during operation, quick installation is possible. The QUINT UPS with IQ technology energy storage leaves the warehouse fully charged.



## Key Commercial Data

Packing unit	1 pc
GTIN	4 063151 466619
GTIN	4063151466619
Weight per Piece (excluding packing)	4,260.000 g
Custom tariff number	85072080
Country of origin	China

## Technical data

#### Dimensions

Width	85 mm	
Height	191 mm	
Depth	110 mm	
Installation distance right/left	0 mm / 0 mm	
Installation distance top/bottom	50 mm / 50 mm	
Ambient conditions		
Degree of protection	IP20	



## Technical data

#### Ambient conditions

Ambient temperature (storage/transport)	-20 °C 40 °C
Ambient temperature (charge)	0 °C 40 °C
Ambient temperature (discharge)	-20 °C 50 °C
Max. permissible relative humidity (operation)	≤ 95 %
Degree of pollution	2
Protection class	111
Degree of protection	IP20
Degree of pollution	2
Weight	3.3 kg
Disposal	Used batteries must not be thrown away with household waste, they should instead be disposed of in accordance with applicable national regulations.
Connection in parallel	yes
	max. 5
Connection in series	No
Battery type	BB Battery HR4.2-12FR
Battery technology	VRLA-AGM
IQ-Technology	yes
Temperature sensor	yes
Latest startup date (battery only)	6 Months (0 °C 20 °C)
Latest startup (battery only) - range	3 Months 6 Months (20 °C 30 °C)
	1 Months 3 Months (30 °C 40 °C)
Accumulator module service life (according to Eurobat)	6 (20 °C)
Storage medium	VRLA-AGM
Size designation	Block

#### Input data

Input voltage	24 V DC (SELV)
Nominal capacity	4 Ah
Charge current	1.2 A
End-of-charge voltage	27.6 V DC (20 °C)
Output voltage	24 V DC
Output current I <sub>max</sub>	25 A
Output fuse	1x 25 A
Buffer time	4.5 min. (20 A)
	3 min. (25 A)




## Technical data

#### **Environmental Product Compliance**

China RoHS	Environmentally Friendly Use Period = 8	
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"	

## Drawings

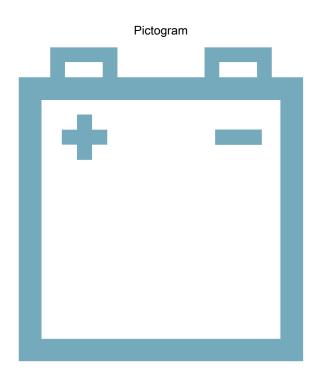

### Classifications

#### eCl@ss

eCl@ss 11.0	27050403
eCl@ss 9.0	27050403

### ETIM

ETIM 7.0	EC000357

## Approvals

### Approvals



Approvals			
Approvals			
cULus Listed / EAC			
Ex Approvals			
cULus Listed			
Approval details			
cULus Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
EAC	EAC		RU D.GB09.W.0081/20
Accessories			
Accessories			
Assembly adapter			
Assembly adapters - QUI	NT-ADAPTER/4 - 28	66857	
	Assembly adapter fo	r QUINT-BAT/24DC on 35mm rail	
PDDGGG			
Battery unit			
Uninterruptible power sup	oply replacement batt	ery - UPS-BAT-KIT/PB/2X12V/4AH - 1283116	
	Replacement battery	r, VRLA-AGM, 2x12 V DC, 4 Ah	
Fuse			



### Accessories

Fuse - FUSE 25A/32V ATOF - 2908366



Fuse, nominal current: 25 A, length: 19.1 mm, width: 5 mm, height: 18.8 mm

Phoenix Contact 2021 © - all rights reserved http://www.phoenixcontact.com