
# **DURACELL**®

## **CR2032**

### Lithium/Manganese Dioxide Battery





#### **Key Features**

- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Child-Safe Markings & Retail Packaging
- Wide operating temperature range (- 20°C / + 60°C)
- Low self-discharge with long operating life (<2% after 1 year of storage at + 20 °C)</li>
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
  - o Safety: IEC 60086-4
  - o Transport: UN 38.3
  - o REACH compliance
  - o Quality: ISO 9001, Duracell World Class Continuous Program

#### **Electrical characteristics**

•	Nominal capacity (15k Ohm Cont., 2.0 V cut-off)	245 mAh
•	Open circuit voltage (at + 20 °C)	3.0 V
•	Standard Continuous Discharge Current	0.5 mA
•	Maximum Continuous Discharge Current	6 mA
•	Maximum Pulse Discharge Current at 1 sec	20 mA
•	Nominal Energy	735 mWh
•	AC Impedance @ 1kHz	20 Ohm

#### **Physical characteristics**

	Typical weight	3.1 g (0.11 oz.)
•	Li metal content	approx. 0.06 g
	Battery Case	Ni Plated SS



Berkshire Corporate Park Bethel, CT. 06801 U.S.A. Telephone: Toll-free 1-800-544-5454

www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

# **DURACELL**®

## **CR2032**

### Lithium/Manganese Dioxide Battery

#### **Typical applications**


- Medical devices
- Security devices
- Fitness devices
- Watches
- Calculators
- Wireless sensors
- Toys
- Key-Fobs & Trackers


#### **Operating conditions**


-20°C to 60°C


■ Operating temperature range (-4°F to 140°F)

Storage temperatures 5°C to 30°C
 Recommended (41°F to 86°F)

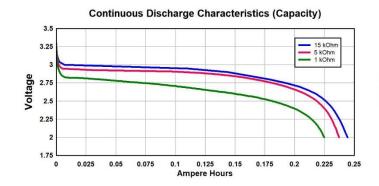

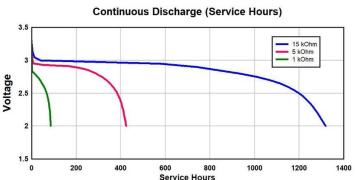

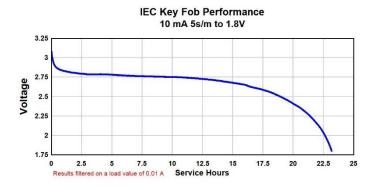

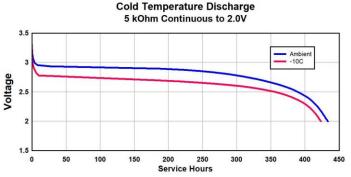

# **DURACELL**BATTERIES

Berkshire Corporate Park Bethel, CT. 06801 U.S.A.

Telephone: Toll-free 1-800-544-5454

www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

# **DURACELL**®

### **CR2032**

### Lithium/Manganese Dioxide Battery

#### IEC 60086-4

Test	Test designation	Observation
А	Altitude	Pass
В	Thermal cycling	Pass
С	Vibration	Pass
D	Shock	Pass
Е	External short circuit	Pass
F	Impact	Pass
G	Crush	Pass
Н	Forced discharge	Pass
I	Abnormal charging	Pass
J	Free fall	Pass
K	Thermal Abuse	Pass

#### Warning

Fire, explosion and burn hazard Do not recharge, short circuit, crush, disassemble, heat above 100 °C (212 °F), incinerate, or expose contents to water

#### Warning! Keep batteries away from children!

Always keep your batteries away from children to prevent swallowing. If ingestion does occur, however, be aware that initial symptoms may be similar to other childhood illnesses such as coughing, drooling and discomfort.

Battery ingestion hotline (1-800-498-8666)

#### **Storage**

The storage area should be clean, cool (preferably not exceeding +30 °C), dry and ventilated



Berkshire Corporate Park Bethel, CT. 06801 U.S.A. Telephone: Toll-free 1-800-544-5454

www.duracell.com