
RLM0816T4F-F Series Current Sensor Resistor (Lead / Halogen Free)

Features / Applications:

- Power rating is up to 1/3W
- Low TCR current sensor
- Resistors are ideal for all types of current sensing
- Metal foil construction; Excellent long-term stability
- Moisture sensitivity level: MSL 1
- RoHS compliant



Electrical Specifications:

Characteristics ¹	Feature		
Power Rating ²	1/3 W		
Resistance Value(mΩ)	1 to 2	3 to 4	5
Temperature Coefficient of Resistance(ppm/°C)	± 150	± 100	± 50
Operation Temperature Range	-55°C to +170°C		
Maximum Working Voltage (V)	(P*R) ^{1/2}		

Note:

- 1. For detailed information see table on page 3
- 2. For sensors operated at ambient temperature in excess of 70°C, the maximum load shall be derated in accordance with the following curve.


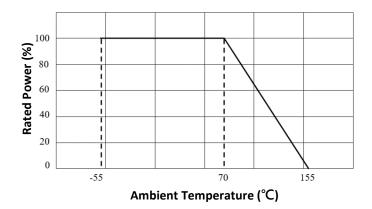


Figure 1. : Power Temperature Derating Curve

DOCUMENT: ST2GF-BNH

PAGE : 1 REVISION : A1

Outline Drawing:

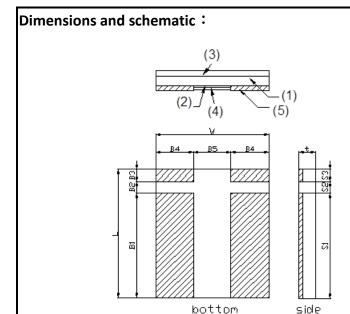

- (1) Substrate
- (2) Resistor: Cu alloy
- (3) Protection coat:

Heat resistive epoxy resin (Black)

(4) Protection coat:

Heat resistive epoxy resin (White)

(5) Terminals: Sn (on Cu)

Resistance Range(mΩ)	L	W	S1	S2	S3	t
	1.60 ± 0.20	0.80 ± 0.15	1.10 ± 0.20	0.25 ± 0.10	0.25 ± 0.10	0.40 ± 0.15
1 to 5	B1	B2	В3	B4	B5	
	1.10 ± 0.20	0.25 ± 0.10	0.25 ± 0.10	0.20 ± 0.10	0.40 ± 0.20	

(Unit:mm)

Type Designation:

RLM 0816 T4F-F- | NH

(1) (2)

(3)

(4) (5)

Note:

(1) Series No.

(2) Size(T4F = 4 - terminal)

(3) Power Rating :F = 1/3W

(4) Resistance value : $0R5m = 0.5m\Omega$; $R002 = 2m\Omega$; $R010 = 10m\Omega$

(5) Tolerance: ±1%(F), ±2%(G), ±5%(J)

DOCUMENT: ST2GF-BNH

PAGE : 2 REVISION : A1



Available standard resistance values:

Basistanas Valuas	Tolerance			
Resistance Values	±1.0%	±2.0%	±5.0%	
R001	✓	✓	✓	
R002	✓	✓	✓	
R003	✓	✓	✓	
R004	✓	✓	✓	
R005	✓	✓	✓	

√ = available

Further values and tolerances on request.

DOCUMENT: ST2GF-BNH

PAGE : 3 REVISION : A1



Reliability Performance:


Test Item	Condition of Test	Requirements
Short Time Overload	2.5 x Rated power for 5 seconds Refer to JIS C 5201-1 4.13	ΔR: ±1.0%
Thermal Cycling	-55 to 125°C 100 cycles, 15 min at each extreme condition Refer to JIS C 5201-1 4.19	ΔR: ±1.0%
Low Temperature Storage	Kept at -55℃, 1000 hours Refer to JIS C 5201-1 4.23.4	ΔR: ±1.0%
Resistance to Soldering Heat	Dipped into solder at $260 \pm 5^{\circ}$ C for 10 ± 1 Δ R : ± 1 . seconds Refer to JIS C 5201-1 4.18	
Load Life	Rated voltage for 1.5hours followed by a pause 0.5hour at 70 ± 3°C Cycle repeated 1000 hours Refer to JIS C 5201-1 4.25	ΔR: ±1.0%
Damp Heat with Load	40 ± 2°C with relative humidity 90% to 95%. D.C. rated voltage for 1.5 hours ON and 30 minutes OFF. Cycle repeated 1,000 hours Refer to JIS C 5201-1 4.24	ΔR: ±1.0%
High Temperature Exposure	Kept at 155℃ for 1000 hours Refer to JIS C 5201-1 4.23.2	ΔR: ±1.0%
Solderability	Temperature of Solder : $245 \pm 5^{\circ}$ C Immersion Duration : 3 ± 0.5 second Refer to JIS C 5201-1 4.17	Uniform coating of solder cover minimum of 95% surface being immersed
Mechanical Shock	100 G's for 6milliseconds. 5 pulses $\Delta R: \pm 1.0\%$ Refer to JIS C 5201-1 4.21	
Substrate Bending	Glass-Epoxy board thickness: 1.6mm Bending width: 2mm Between the fulcrums: 90mm Refer to JIS C 5201-1 4.33	ΔR: ±1.0%

Note: Measurement at 24±4 hours after test conclusion for all reliability tests-parts.

DOCUMENT: ST2GF-BNH

PAGE : 4 REVISION : A1


Recommend Solder Pad Dimensions:



Dimensions (mm)	а	b	С	d	е
1 to 5 m Ω	0.4	1.9	0.4	0.2	0.35

Packaging:

Tape packaging dimensions:

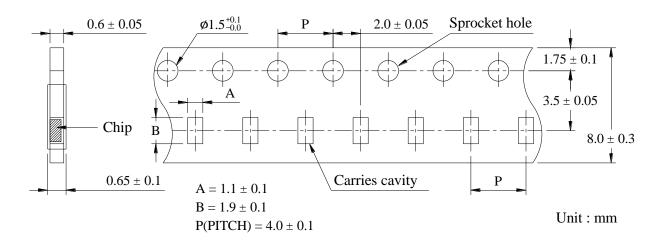


DOCUMENT: ST2GF-BNH

PAGE : 5 REVISION : A1




Reel dimensions:

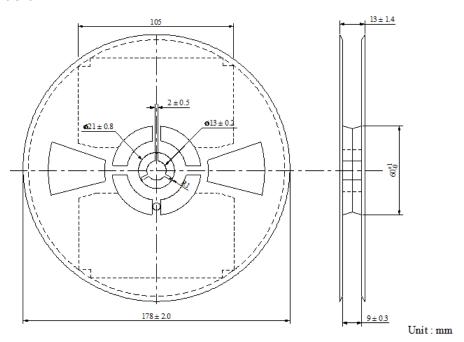

Peel Strength of Top Cover Tape:

The peel speed shall be about 300mm/min.

The peel force of top cover tape shall between 0.1 to 0.7N



Number of Taping:

5,000 pieces / reel

Label Marking:


The following items shall be marked on the reel.

- (1) Type designation
- (2) Quantity
- (3) Manufacturing date code
- (4) Manufacturer's name
- (5) The country of origin

DOCUMENT: ST2GF-BNH

PAGE : 6 REVISION : A1

Recommend Soldering Conditions: :

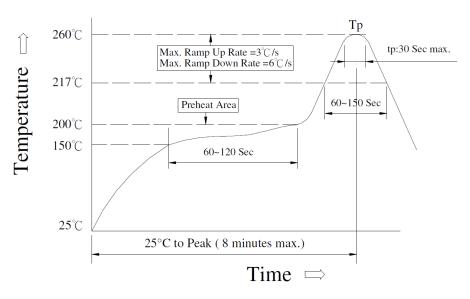

Meet JEDEC-020D

(1) Reflow Soldering Method:

Defless Calderine	Tp:255 to 260°C Max.30 seconds (Tp)	
Reflow Soldering	217°C 60 to 150 seconds	
Pre-Heat	150 to 200℃ 60 to 120 seconds	
Time 25℃ to peak temperature	8 minutes max	

(2) Soldering Iron Method: 350± 5°C max.3 seconds

DOCUMENT: ST2GF-BNH

PAGE : 7 REVISION : A1



Care Note:

Care note for storage

- (1) Current sensor shall be stored in a environment where temperature and humidity must be controlled (temperature 5 to 40°C, humidity 30 to 80% RH). However, the humidity should be maintained as low as possible.
- (2) Current sensor shall not be stored under direct sunlight.
- (3) Current sensor shall be stored in condition without moisture, dust, any material defect solderability, or hazardous gas (i.e. Chlorination hydrogen, sulfurous acid gas, and sulfuration hydrogen)
- (4) The sensor can be stored for at least one year under the condition mentioned above.

Care note for operating and handling

- (1) It is necessary to protect the edge and protection coat of resistors from mechanical stress.
- (2) Handle with care when printing circuit board (PCB) is divided or fixed on support body, because bending of printing circuit board (PCB) mounting will make mechanical stress for resistors.
- (3) Resistors shall be used with in rated range shown in specification. Especially, if voltage more than specified value will be loaded to resistor, there is a case it will make damage for machine because of temperature rise depending on generating of heat, and increase resistance value or breaks.
- (4) In case that resistor is loaded a rated voltage, it is necessary to confirms temperature of a resistor and to reduce a load power according to load reduction curve, because a temperature rise of a resistor depends on influence of heat from mounting density and neighboring element.
- (5) Observe Limiting element voltage and maximum overload voltage specified in each specification
- (6) If there is possibility that a large voltage (pulse voltage, shock voltage) charge to resistor, it is necessary that operating condition shall be set up before use.

DOCUMENT: ST2GF-BNH

PAGE: 8 REVISION: A1