

CK4W

cleankeys®



FEATURES

- Wireless keyboard with complete flat Gorilla® glass surface
- Excellent hygienic level, because it's washable and disinfectable
- Key lock to disable the keyboard before cleaning
- A LED indicator shows when the keyboard needs cleaning
- Full key layout with integrated Touchpad
- 2.4 GHz wireless connection
- Volume and sensitivity are adjustable individually
- Rearside VESA mounting option
- Multi country AC adaptor
- Various designs are possible
- EMC compliant with EN 60601-1-2 Edition 4

TECHNICAL DATA

Number of keys:	103	System requirements:	Win®, MacOS® and Linux® *
Housing type:	desktop keyboard	Compliance:	
Enclosure material:	plastic	-- Europe:	CE
Surface material:	0.8 mm Gorilla® glass	-- USA/Canada:	FCC Part 15 Subpart B
Switch technology:	capacitive	-- Global:	REACH,
Protection level:	IP65	Warranty:	RoHS self-declaration
Interface:	USB (USB Dongle, 2.4 GHz)		4 years on the electrical function
USB compatibility:	compliant with USB 2.0	TECHNICAL DATA TOUCHPAD	
Operating temperature:	0 °C to +45 °C	Operating principle:	capacitive
Storage temperature:	-10 °C to +45 °C	Dimensions:	60 x 42 mm
Dimensions:	470 x 167 x 25.4 mm		

ORDER INFORMATION

Cat.No.	Product description	Layout
KR24230	TKR-103-TOUCH-RF-KGEH-VESA-WHITE-USB-DE	German
KR24231	TKR-103-TOUCH-RF-KGEH-VESA-WHITE-USB-US/EU	US/EU English
KR25207	TKR-103-TOUCH-RF-KGEH-VESA-WHITE-USB-CH	Switzerland
KR25205	TKR-103-TOUCH-RF-KGEH-VESA-WHITE-USB-FR	French
KR25206	TKR-103-TOUCH-RF-KGEH-VESA-WHITE-USB-SKAN	Scandinavian
KR25211	TKR-103-TOUCH-RF-KGEH-VESA-WHITE-USB-UK	UK

Other language versions available on request.

* if OS and Hardware meet the requirements of USB2.0 compliance

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
Tel: +49 37468 660-0
Fax: +49 37468 660-66
E-Mail: info@gett.de
Internet: www.gett.de


Gett North America LLC

E-Mail: info@gett-na.com
Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com
Internet: www.gett-asia.com

TECHNICAL DRAWING (in mm)

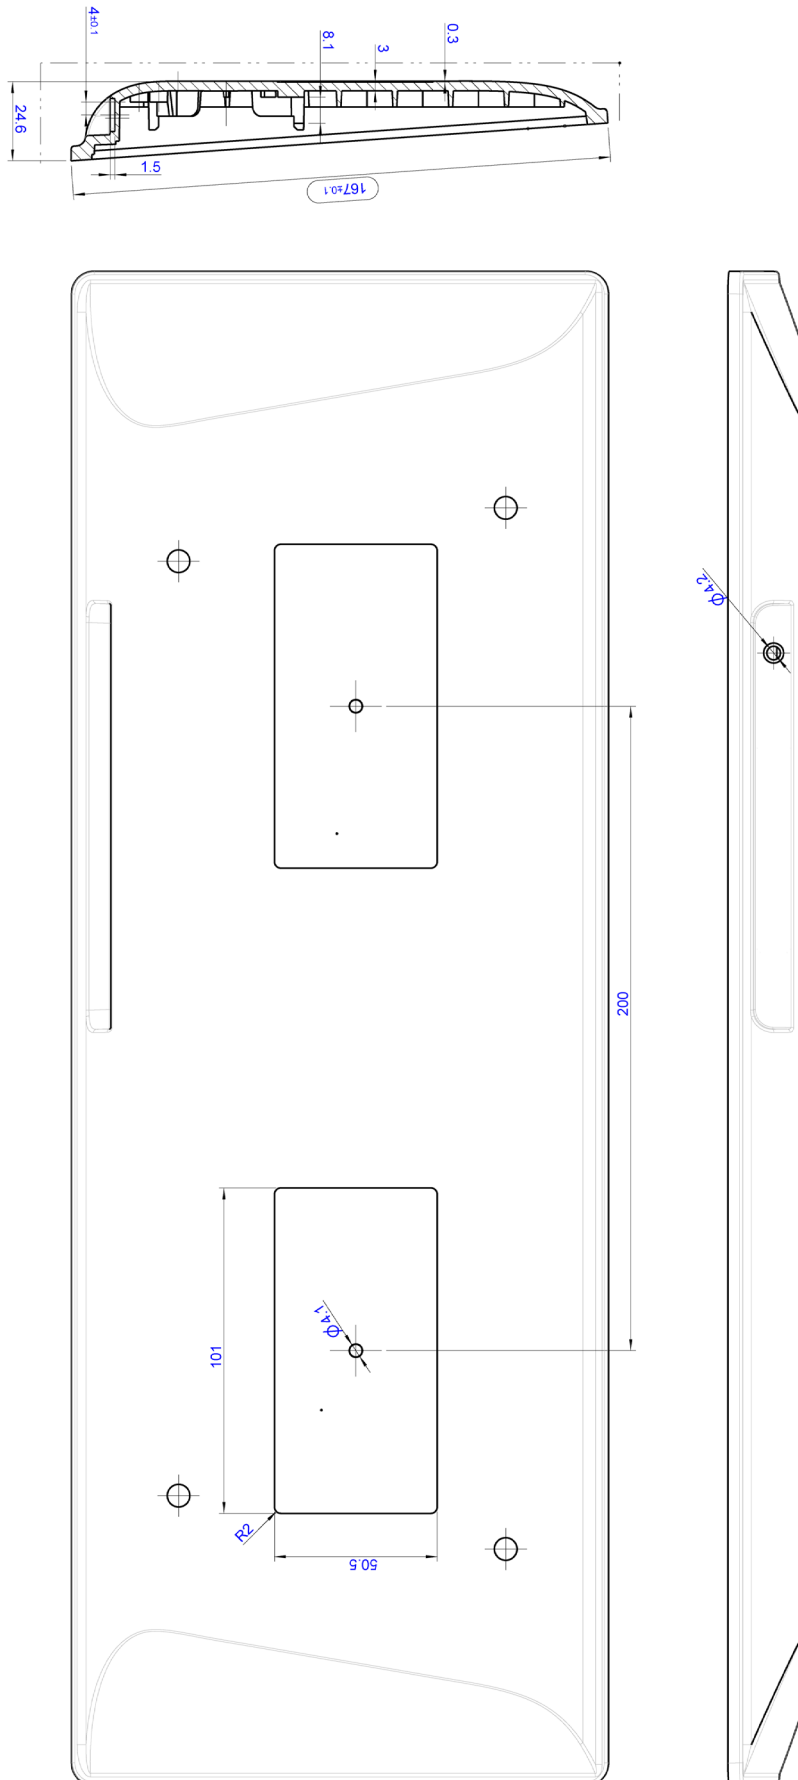

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany
 Tel: +49 37468 660-0
 Fax: +49 37468 660-66
 E-Mail: info@gett.de
 Internet: www.gett.de

Gett North America LLC








E-Mail: info@gett-na.com
 Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com
 Internet: www.gett-asia.com

ADDITIONAL KEY FUNCTIONS OF CK4W

----- The LED bar indicates the level or settings of battery charge, sensitivity, beep volume and keylock function.

	+		<p>STATUS KEY</p> <p>When the status key is pressed, the LED bar indicates the battery charging status in eight levels.</p>
	+		<p>The SENSITIVITY can be set as follows (ascending):</p> <p>Level 1 ○ ○ ○ ● ● ○ ○ ○</p> <p>Level 2 ○ ○ ● ● ● ● ○ ○</p> <p>Level 3 ○ ● ● ● ● ● ● ○</p> <p>Level 4 ● ● ● ● ● ● ● ●</p>
	+		<p>The VOLUME can be set as follows (ascending):</p> <p>Level 1 ● ○ ○ ○ ○ ○ ○ ○</p> <p>Level 2 ● ● ○ ○ ○ ○ ○ ○</p> <p>Level 3 ● ● ● ● ○ ○ ○ ○</p> <p>Level 4 ● ● ● ● ● ● ○ ○</p> <p>Level 5 ● ● ● ● ● ● ● ●</p>
			<p>KEY LOCK FUNCTION</p> <p>Press the keylock button for approx. 2 seconds. This will cause the status display to flash; when it is permanently green, the keys are locked. To unlock the system, press the keylock button for 2 seconds again and wait until the status LED goes off. The keys are then ready for use again.</p>

CLEANING

You can clean the glass surface with normal cleaning and disinfecting agents. The chemical resistance of the glass surface may vary depending on the concentration of the solution and the particular environmental conditions. We therefore recommend that you carefully check your cleaning and disinfecting agents to see how they affect glass surfaces.

INDIVIDUAL MODIFICATIONS

- Adding a Logo/Brand (1-4 colours)
- New country layout
- Individual GUI design
- Reducing the keyboard cable length
- Changing of the keytable (HID-Standard)