

Dimensions in inches and illimete Polarity: Color band denotes cathode end Mounting Position: Any Weight: 0.005 ounce, 0.138 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	SS22	SS23	SS24	SS25	SS26	SS28	SS210	UNITS
Maximum repetitive peak reverse voltage	Vrrm	20	30	40	50	60	80	100	VOLTS
Maximum RMS voltage	Vrms	14	21	28	35	42	56	70	VOLTS
Maximum DC blocking voltage	Vdc	20	30	40	50	60	80	100	VOLTS
Maximum average forward rectified current at TL(see fig.1)	I(AV)	2.0						Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	Ifsm	50.0						Amps	
Maximum instantaneous forward voltage at 2.0A	Vf		0.55		0.70 0		0.8	5	Volts
Maximum DC reverse current TA=25℃ at rated DC blocking voltage TA=100℃	Ir	0.5						mA	
Typical junction capacitance (NOTE 1)	CJ	220 180			80		pF		
Typical thermal resistance (NOTE 2)	Rqja	75.0						°C/W	
Operating junction temperature range	TJ,	-65 to +125 -65 to +150					°C		
Storage temperature range	Тятс	-65 to +150						°C	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C. 2.P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

WWW.MOSLEADER.COM



RATINGS AND CHARACTERISTIC CURVES SS22-ML THRU SS210-ML

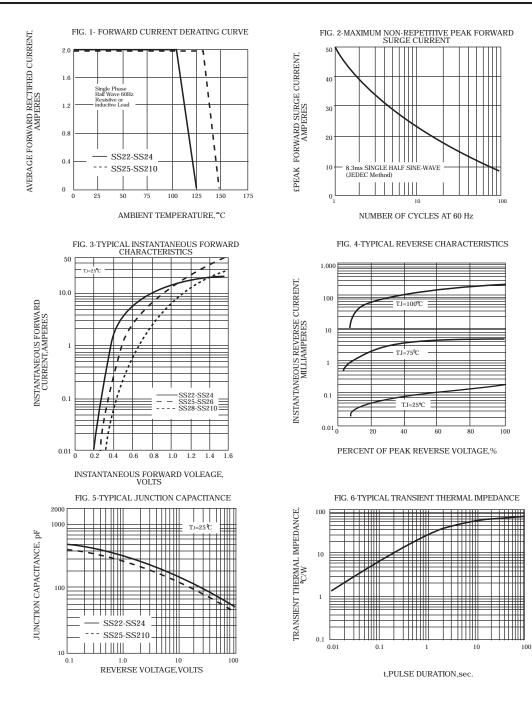

WWW.MOSLEADER.COM



Disclaimer

The information presented in this document is for reference only.MOSLEADER reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), MOSLEADER or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

WWW.MOSLEADER.COM