


# COAXIAL CONNECTOR, 1.0/2.3 C50, 50 Ohm, Right angle PCB jack (female)

85\_1023-C50-0-1/111\_N

## Properties

- Suitable for the insertion of layout connectors DIN 41612
- Fast and easy assembly
- Applicable in frequencies up to 4 GHz

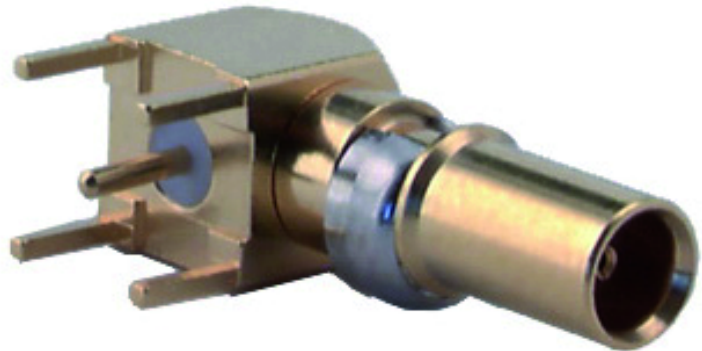

Product configuration		
Interface type	Gender	Standard
1.0/2.3 C50	jack	DIN 41626/2

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

Electrical data	
Impedance	50 Ω
Interface frequency	4 GHz

Mechanical data	
Weight	0.0025 kg
Mating cycles	500
Board mounting type	through holes
Number of printlegs	4
Height above PCB HA	6.2 mm
Height of stand off HS	0.25 mm
Disengagement force (to)	10 N
Engagement force max	10 N

Environmental data	
Operation temperature	-55 °C ... 125°C

**COAXIAL CONNECTOR, 1.0/2.3 C50, 50 Ohm, Right angle PCB jack (female)**

85\_1023-C50-0-1/111\_N

Ordering Information Table		
Item number	Item description	Packaging type
22648561	85_1023-C50-0-1/111_NE	Single

Additional Information	
Remarks	PCB connector with stand-offs

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P1292 / Date of publication: 26.11.2023 / uncontrolled copy